


光谱图

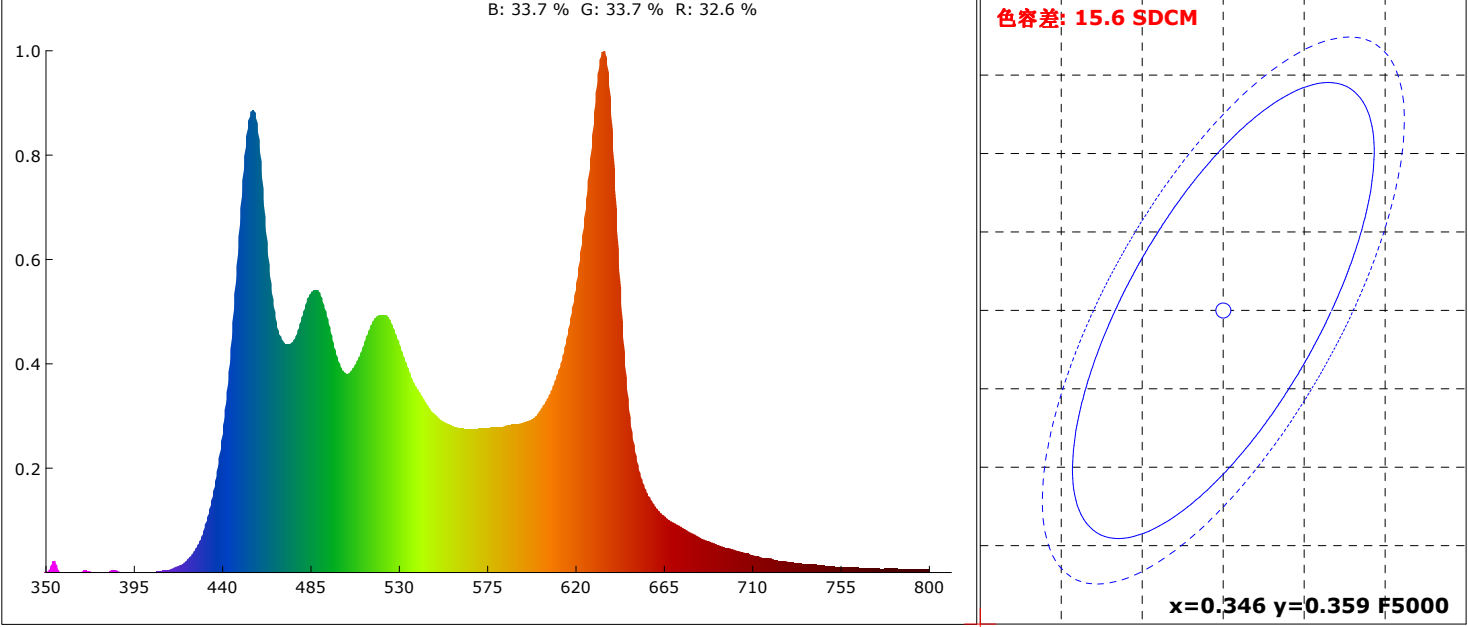

颜色参数:

坐标x: 0.3271 坐标y: 0.3138 坐标u: 0.2141 坐标v: 0.3081 坐标u': 0.2141 坐标v': 0.4621

红色比: 32.6 % 绿色比: 33.7 % 蓝色比: 33.7 % 光通量红色比: 22.1 % 光通量绿色比: 71.8 % 光通量蓝色比: 6.2 %

显色指数: 66.5 AvgR: 55.7

R1: 56.0	R2: 72.6	R3: 91.0	R4: 61.6	R5: 59.2	R6: 63.8	R7: 82.9	R8: 45.4
R9: -48.4	R10: 40.5	R11: 51.8	R12: 58.0	R13: 58.7	R14: 93.0	R15: 48.9	


色温: 5781 K	光通量: 9343.066 lm	峰值波长: 634.5 nm	色容差: 15.6
明暗视觉比: 2.6	中心波长: 630.9 nm	主波长: 0.0 nm	质心波长: 549.8 nm
半宽度: 25.1 nm	色偏差: -0.01218	色纯度: 0.0 %	色质指数: 86.8
LER(TM-30): 260.8	辐射功率: 35826.8 mw	色域指数(Rg): 107.6	逼真度(Rf): 75.5
红光辐射功率: 11458.5 mw	近红辐射功率: 524.3 mw	远红辐射功率: 55.1 mw	

电参数:

光效: 29.4 Lm/W	能效: 32.0	能效等级: G	
电压: 219.6 V	电流: 1.991 A	功率: 317.600 W	功率因素: 0.726

产品型号:	制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号:	测试单位:
测试人员:	测试日期:07/16/14
备注:	

Rf: 75.5 CCT: 5781K u': 0.2141
Rg: 107.6 LER: 260.8 Duv: -0.01218 v': 0.4621

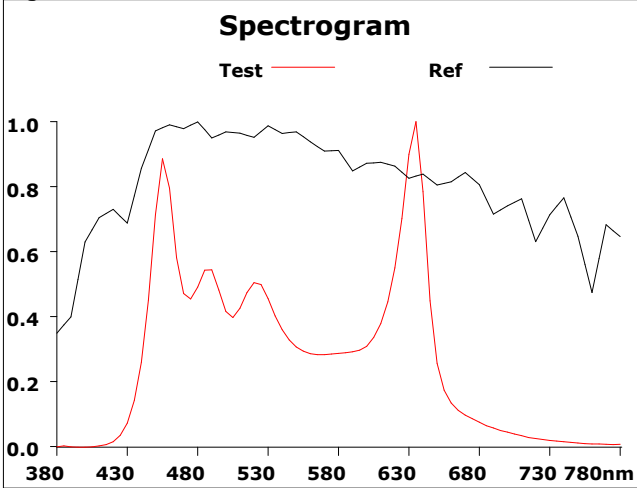

500			
Hue Bin	Rf	Chroma	Hue
1	65.4	15.6%	3.7%
2	72.8	13.6%	-6.9%
3	64.5	7.7%	-16.7%
4	70.4	-4.6%	-16.2%
5	75.0	-11.9%	-7.9%
6	88.3	-3.1%	5.2%
7	78.7	3.6%	11.9%
8	71.1	10.6%	11.4%
9	79.8	14.8%	5.6%
10	79.2	10.3%	-4.7%
11	78.2	7.8%	-8.5%
12	80.1	-0.2%	-12.1%
13	84.4	-4.0%	-3.7%
14	77.4	-3.9%	10.7%
15	72.2	11.5%	12.6%
16	73.1	9.0%	10.6%

