


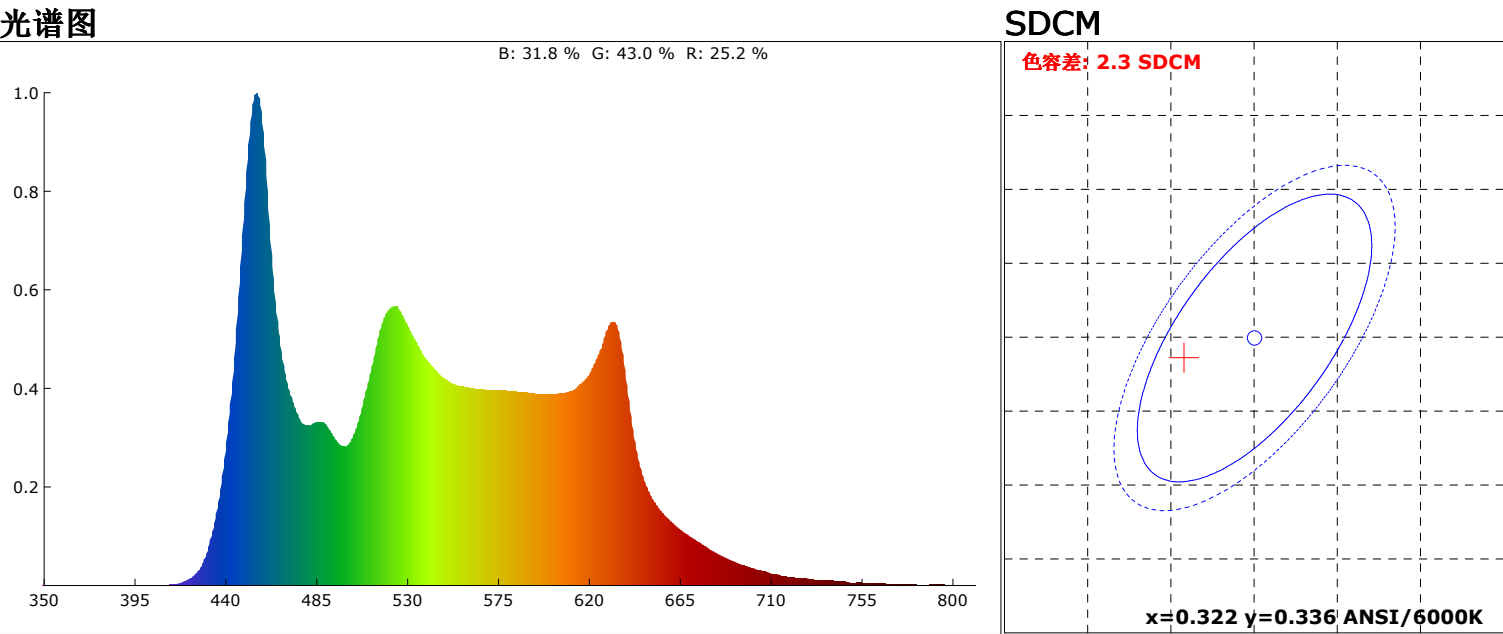

颜色参数:

坐标x: 0.3208	坐标y: 0.3386	坐标u: 0.1998	坐标v: 0.3164	坐标u': 0.1998	坐标v': 0.4746
红色比: 25.2 %	绿色比: 43.0 %	蓝色比: 31.8 %	光通量红色比: 15.7 %	光通量绿色比: 79.7 %	光通量蓝色比: 4.6 %

显色指数: 96.0

AvgR: 93.3


R1: 97.9	R2: 98.4	R3: 95.4	R4: 97.2	R5: 95.2	R6: 94.5	R7: 96.0	R8: 93.8
R9: 85.3	R10: 93.1	R11: 95.9	R12: 65.7	R13: 99.0	R14: 96.6	R15: 95.0	

色温: 6040 K	光通量: 1310.724 lm	峰值波长: 455.4 nm	色容差: 2.3
明暗视觉比: 2.3	中心波长: 456.2 nm	主波长: 497.2 nm	质心波长: 544.5 nm
半宽度: 21.4 nm	色偏差: 0.00415	色纯度: 3.9 %	色质指数: 92.2
LER(TM-30): 305.7	辐射功率: 4287.3 mw	色域指数(Rg): 98.6	逼真度(Rf): 89.0
红光辐射功率: 1069.5 mw	近红辐射功率: 44.1 mw	远红辐射功率: 2.5 mw	







电参数:

光效: 7.0 Lm/W	能效: 7.6	能效等级: G	
电压: 219.0 V	电流: 1.242 A	功率: 188.000 W	功率因素: 0.691

Rf: 89.0 CCT: 6040K u': 0.1998
Rg: 98.6 LER: 305.7 Duv: 0.00415 v': 0.4746



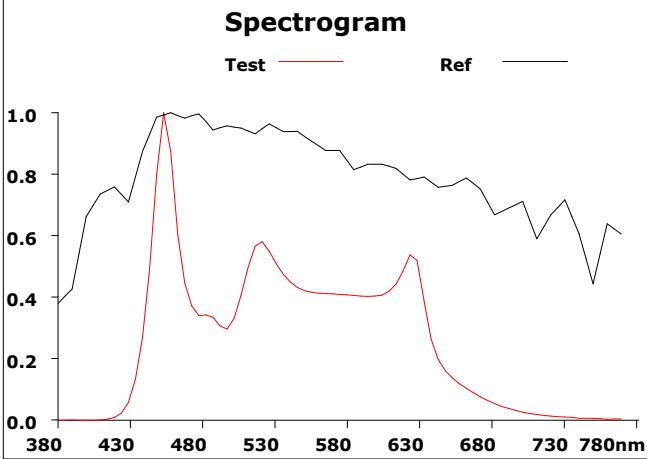


500			
Hue Bin	Rf	Chroma	Hue
1	89.6	-2.8%	1.0%
2	97.0	-0.1%	0.6%
3	93.8	-1.1%	-0.5%
4	93.0	-2.3%	-0.6%
5	84.9	-7.7%	-1.1%
6	93.1	-2.9%	1.4%
7	96.0	-1.7%	1.1%
8	88.1	-3.3%	5.5%
9	85.7	-2.5%	11.4%
10	81.7	-0.2%	10.5%
11	81.9	4.6%	9.0%
12	93.3	3.2%	-1.4%
13	88.4	3.8%	-5.6%
14	91.8	0.5%	-2.8%
15	78.4	7.7%	-13.0%
16	95.0	-1.5%	0.2%

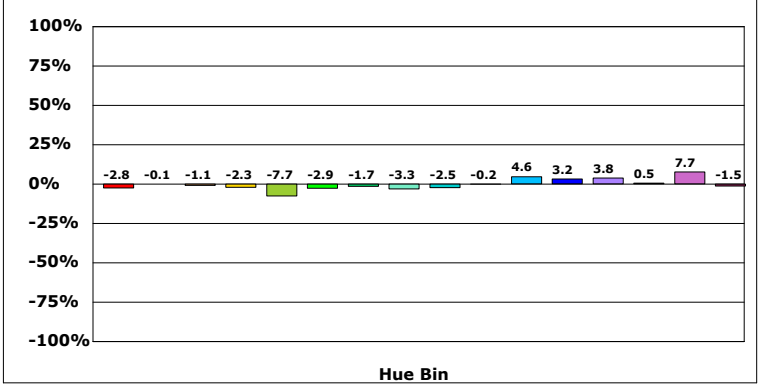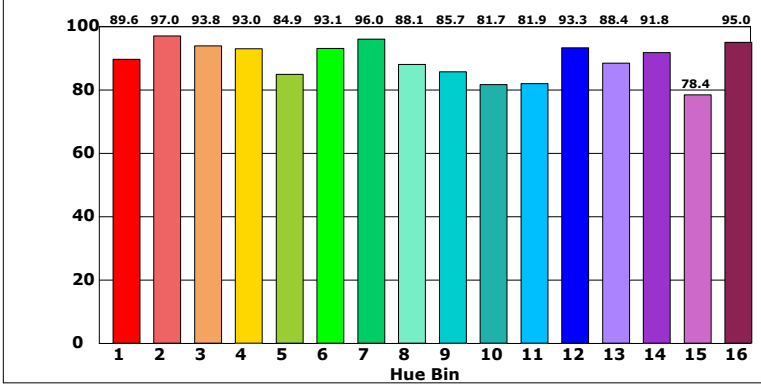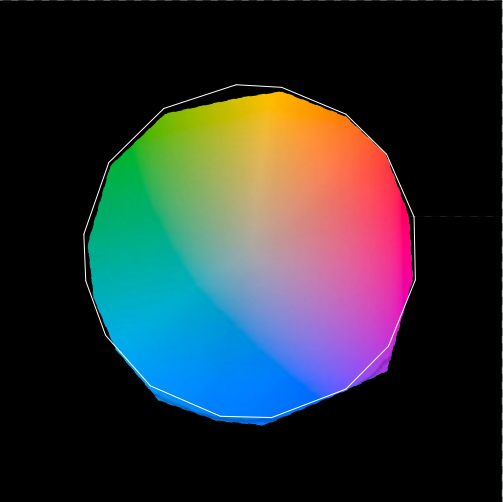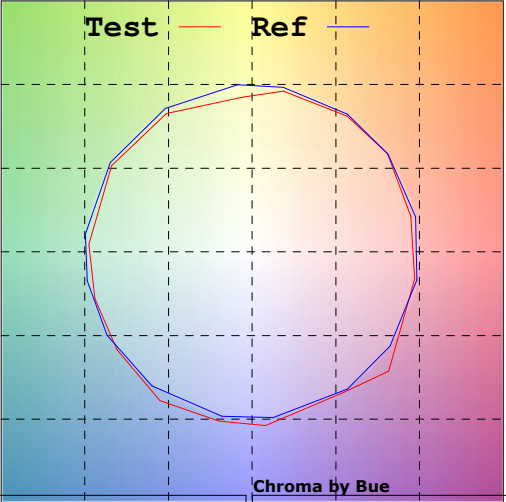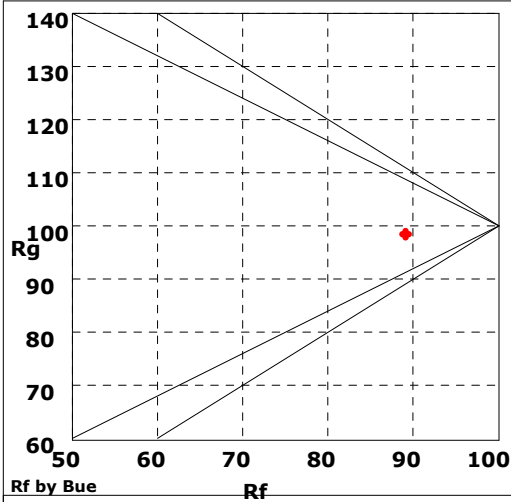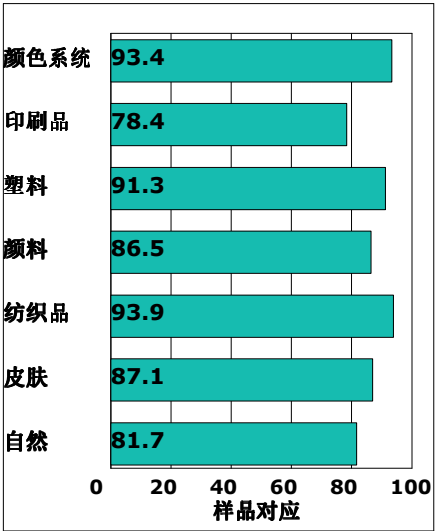


产品型号:
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/19/14

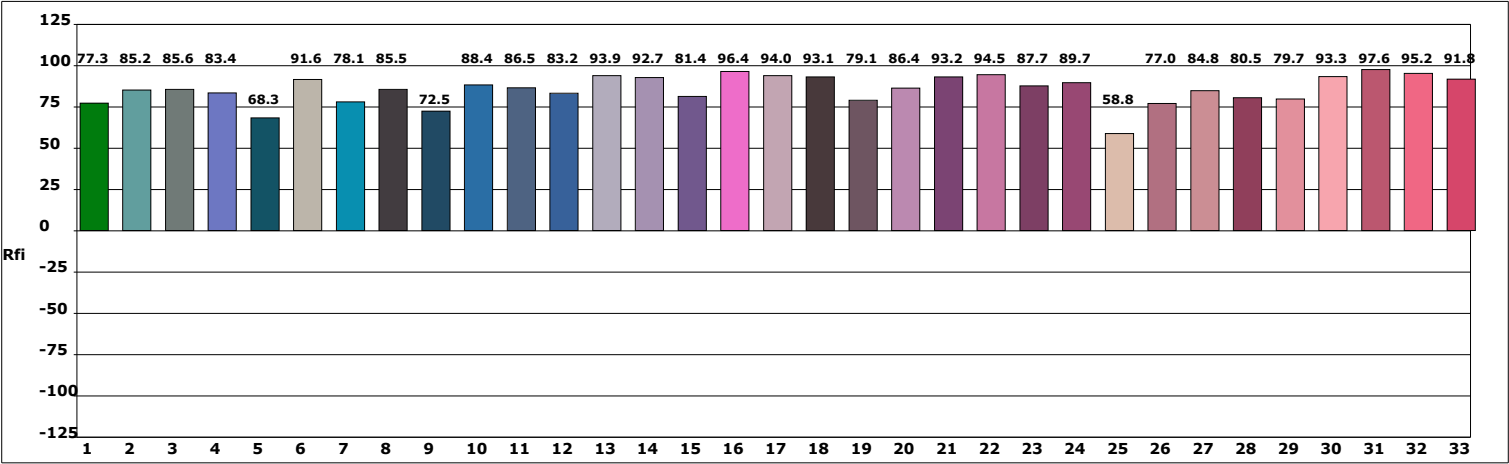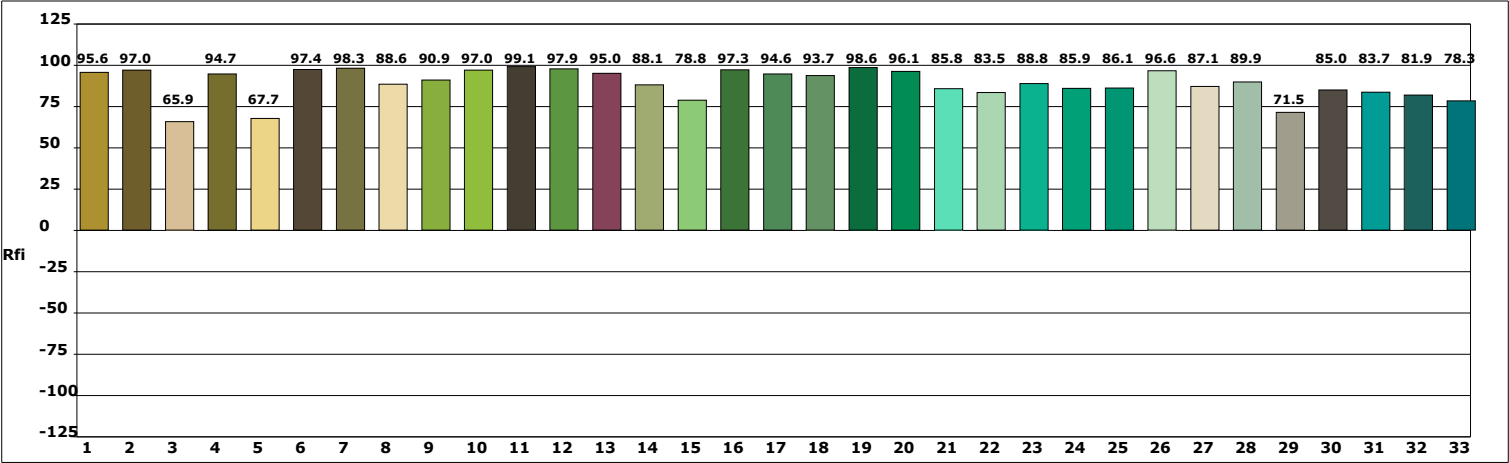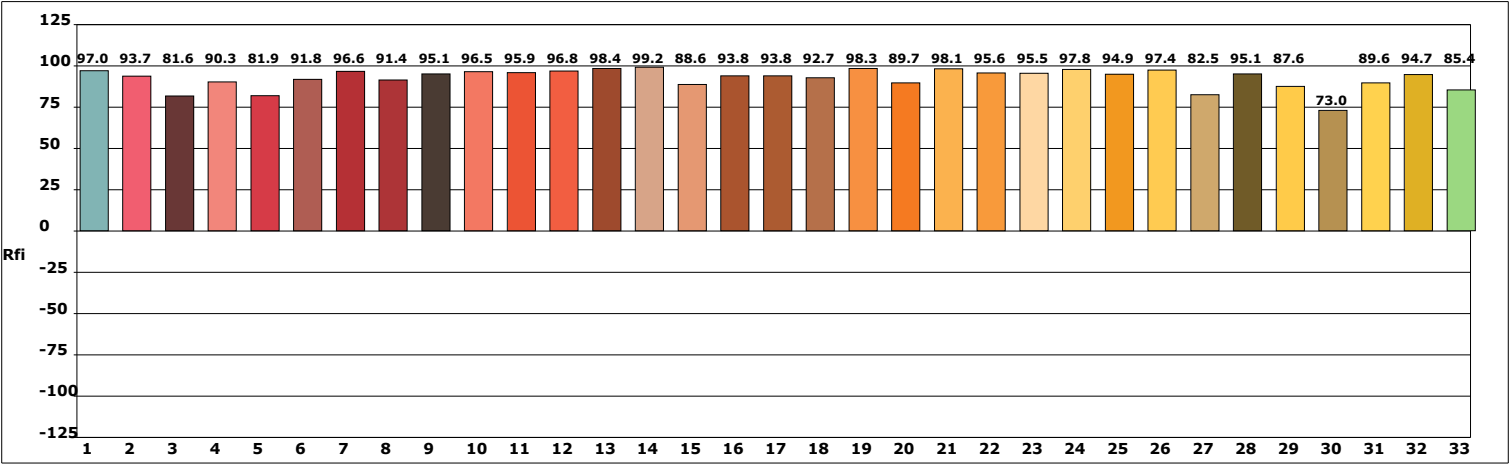

光谱图

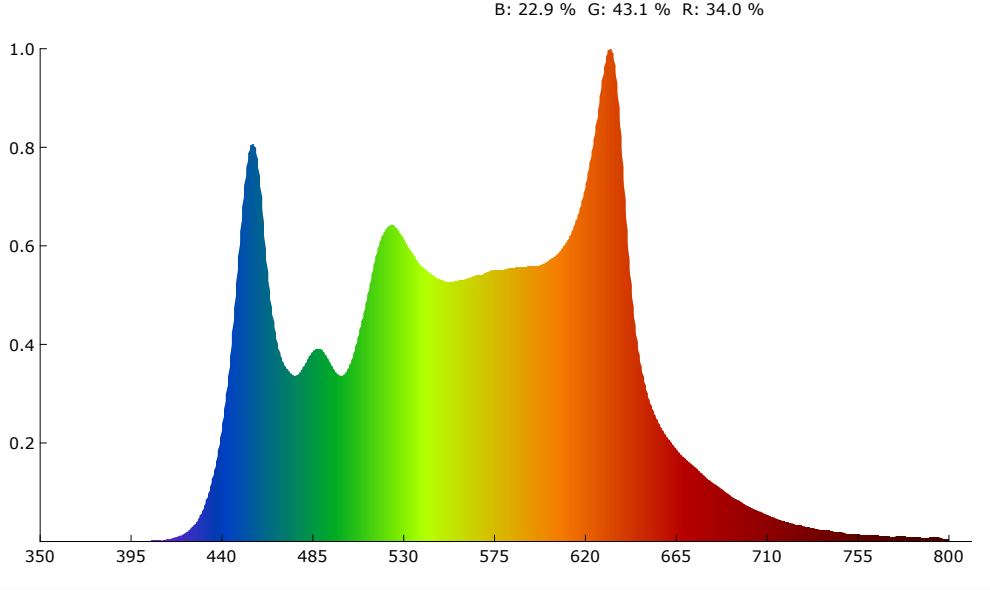

SDCM

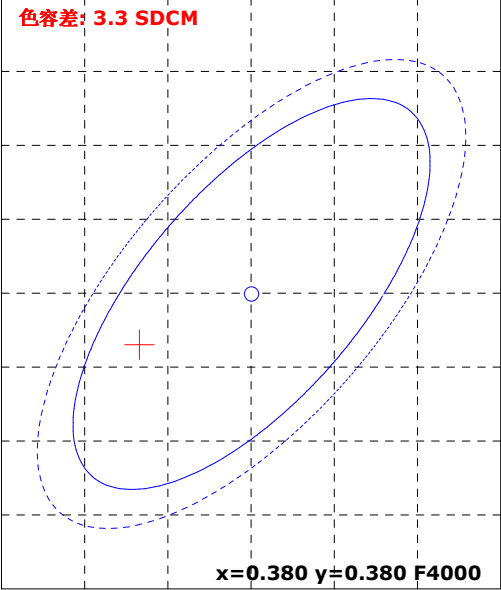

颜色参数:

坐标x: 0.3733 坐标y: 0.3765 坐标u: 0.2205 坐标v: 0.3336 坐标u': 0.2205 坐标v': 0.5004
红色比: 34.0 % 绿色比: 43.1 % 蓝色比: 22.9 % 光通量红色比: 19.6 % 光通量绿色比: 77.1 % 光通量蓝色比: 3.3 %


显色指数: 97.1 AvgR: 95.2
R1: 96.9 R2: 99.5 R3: 96.1 R4: 97.8 R5: 97.5 R6: 96.7 R7: 96.4 R8: 96.3
R9: 96.0 R10: 97.2 R11: 95.6 R12: 72.7 R13: 97.3 R14: 96.4 R15: 96.3

色温: 4199 K 光通量: 1314.643 lm 峰值波长: 632.5 nm 色容差: 3.3
明暗视觉比: 1.9 中心波长: 577.8 nm 主波长: 577.1 nm 质心波长: 562.5 nm
半宽度: 130.3 nm 色偏差: 0.00204 色纯度: 25.0 % 色质指数: 94.5
LER(TM-30): 316.4 辐射功率: 4155.5 mw 色域指数(Rg): 98.8 逼真度(Rf): 89.8
红光辐射功率: 1386.1 mw 近红辐射功率: 73.9 mw 远红辐射功率: 5.6 mw







电参数:

光效: 7.3 Lm/W 能效: 8.0 能效等级: G
电压: 219.2 V 电流: 1.187 A 功率: 179.100 W 功率因素: 0.688

Rf: 89.8 CCT: 4199K u': 0.2205
Rg: 98.8 LER: 316.4 Duv: 0.00204 v': 0.5004



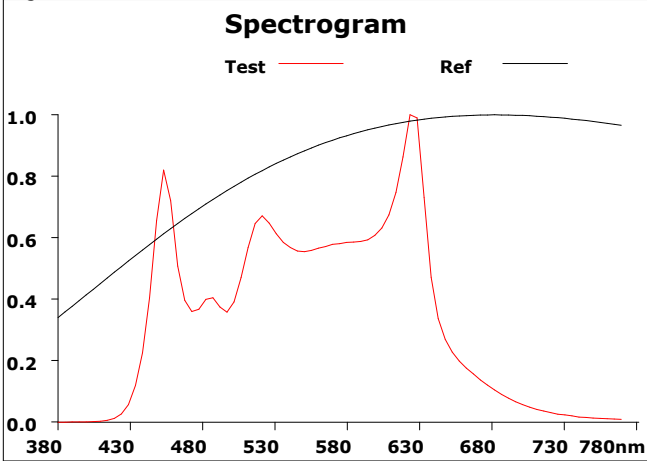



500			
Hue Bin	Rf	Chroma	Hue
1	92.4	-1.1%	0.9%
2	95.8	0.8%	-1.2%
3	94.0	-0.8%	-1.7%
4	90.2	-4.2%	-3.4%
5	88.6	-7.2%	-0.8%
6	93.6	-2.4%	2.5%
7	91.5	-2.8%	4.1%
8	90.3	-0.9%	5.4%
9	87.0	0.2%	9.6%
10	86.0	0.8%	6.8%
11	86.4	5.4%	6.0%
12	90.0	3.7%	-1.6%
13	87.5	2.8%	-7.7%
14	93.7	-0.8%	0.2%
15	85.8	0.4%	-5.5%
16	86.8	0.9%	-5.3%

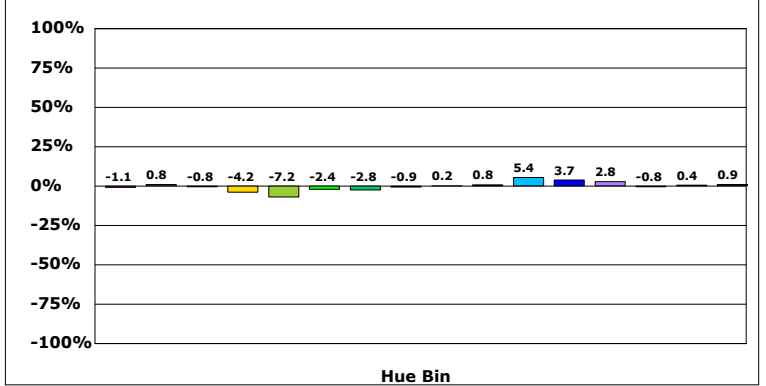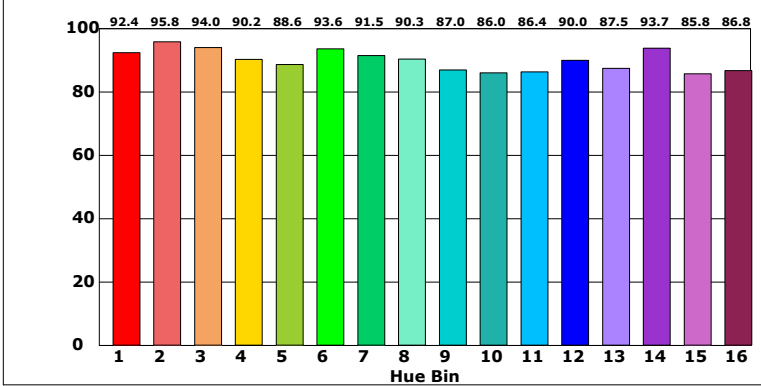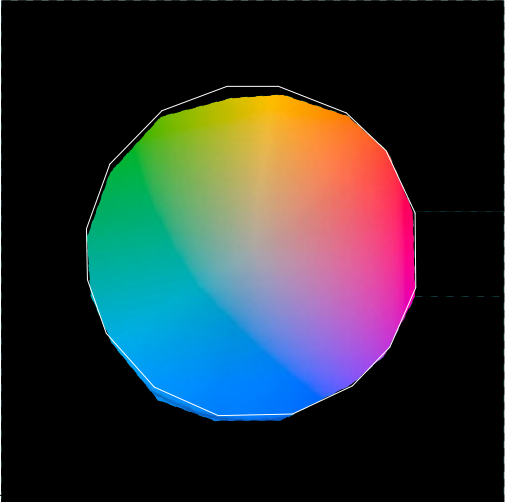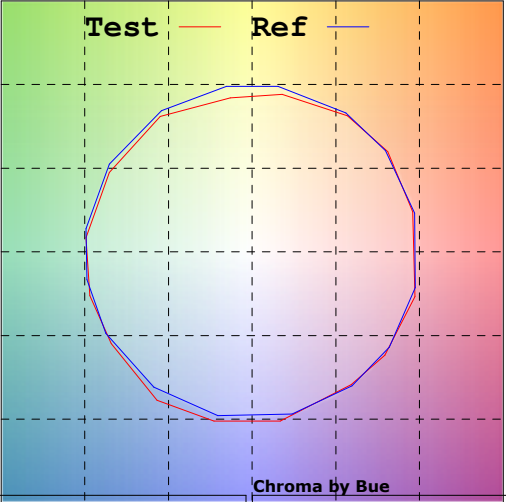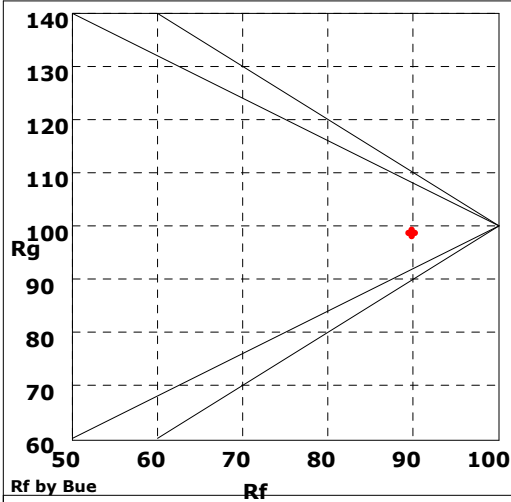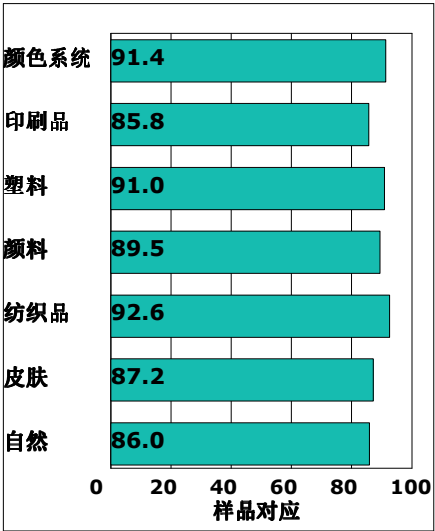

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/19/14

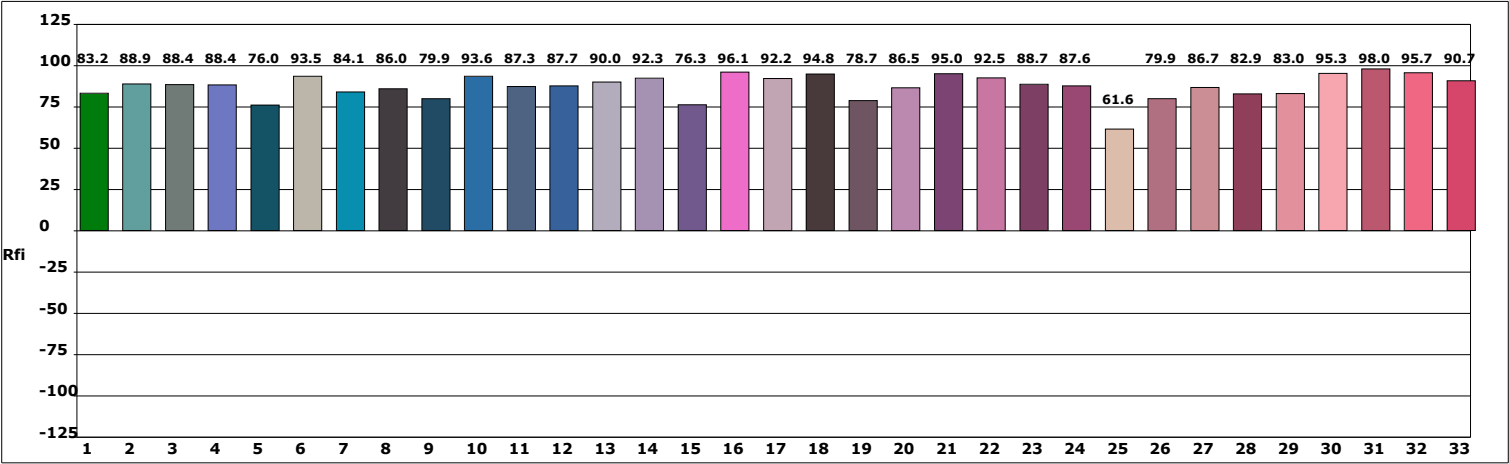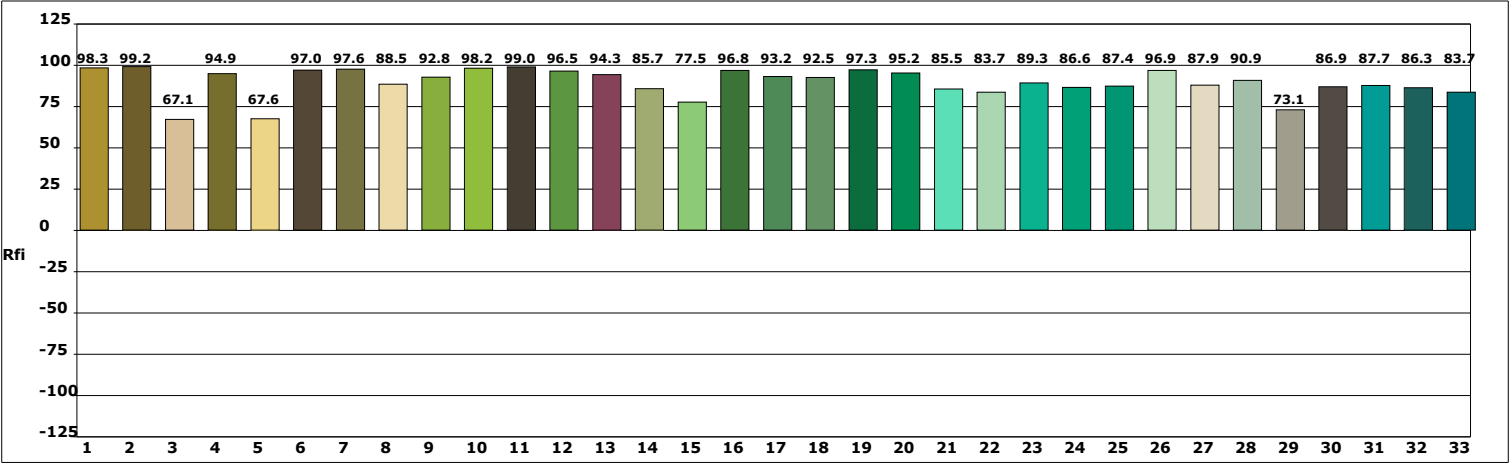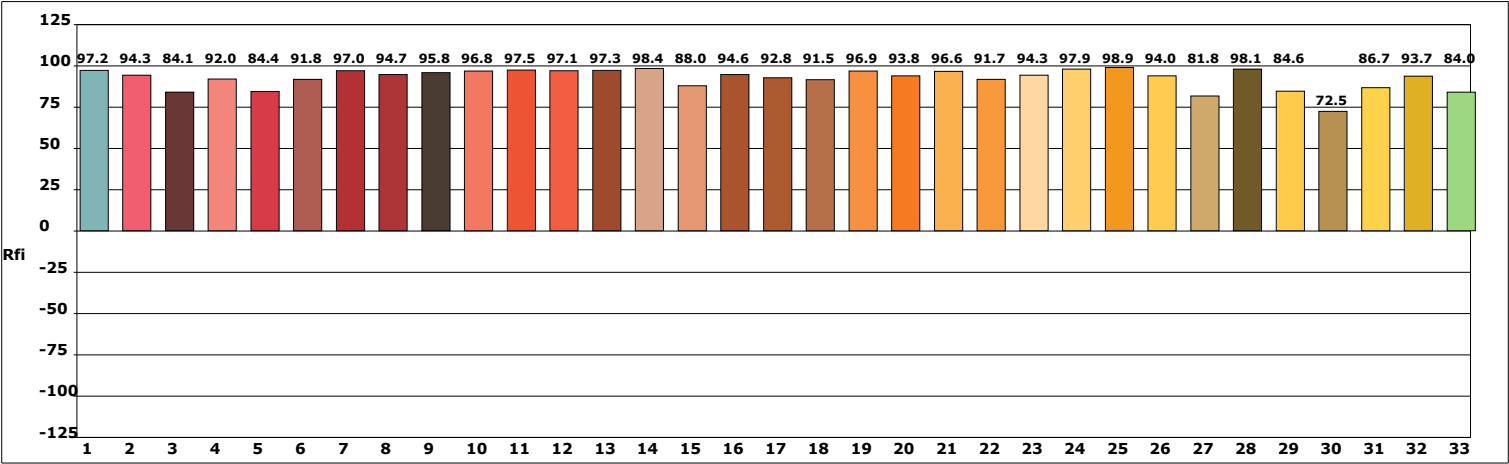

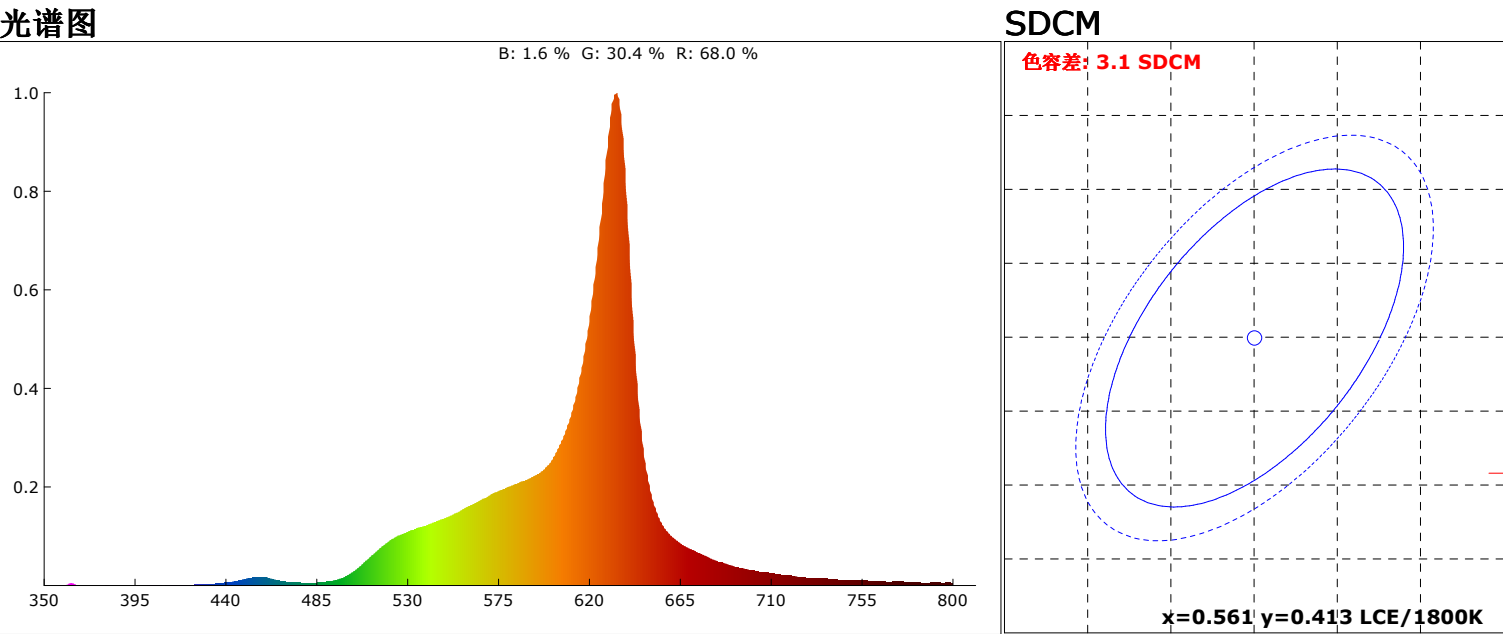

颜色参数:

坐标x: 0.5647
红色比: 68.0 %

坐标y: 0.4108
绿色比: 30.4 %

坐标u: 0.3322
蓝色比: 1.6 %

坐标v: 0.3625
光通量红色比: 40.8 %

坐标u': 0.3322
光通量绿色比: 59.0 %

坐标v': 0.5438
光通量蓝色比: 0.2 %

显色指数: 93.7
R1: 96.2
R9: 78.7

AvgR: 92.0
R2: 99.0
R10: 90.0

R3: 85.3
R11: 84.8

R4: 91.8
R12: 95.3

R5: 96.8
R13: 97.1

R6: 93.6
R14: 87.2

R7: 95.3
R15: 96.2

R8: 92.3

色温: 1711 K
明暗视觉比: 0.7
半宽度: 23.1 nm
LER(TM-30): 295.4
红光辐射功率: 2215.5 mw

光通量: 992.985 lm
中心波长: 630.9 nm
色偏差: 0.00206
辐射功率: 3361.4 mw
近红辐射功率: 89.7 mw

峰值波长: 633.5 nm
主波长: 591.3 nm
色纯度: 92.8 %
色域指数(Rg): 94.0
远红辐射功率: 10.0 mw

色容差: 3.1
质心波长: 611.9 nm
色质指数: 50.8
逼真度(Rf): 86.2

电参数:

光效: 6.8 Lm/W
电压: 219.4 V

能效: 7.4
电流: 0.993 A


能效等级: G
功率: 146.900 W

功率因素: 0.674

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/19/14

Rf: 86.2 CCT: 1711K u': 0.3322
Rg: 94.0 LER: 295.4 Duv: 0.00206 v': 0.5438

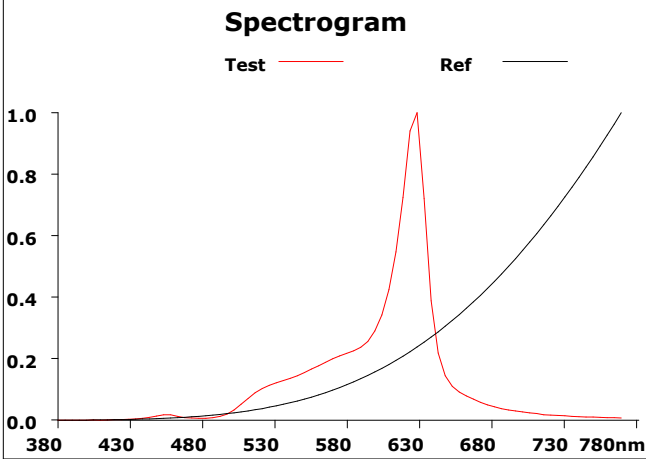

500			
Hue Bin	Rf	Chroma	Hue
1	88.5	-2.5%	-3.5%
2	85.0	-4.3%	-4.4%
3	81.0	-5.9%	-7.6%
4	90.5	-6.5%	1.0%
5	91.3	-4.0%	6.5%
6	74.8	4.5%	14.6%
7	91.9	3.3%	2.6%
8	89.8	5.8%	-3.3%
9	84.5	1.5%	-7.5%
10	85.4	-3.3%	-7.1%
11	91.3	-2.8%	-4.1%
12	89.2	-3.1%	-4.4%
13	71.5	-6.8%	-20.2%
14	74.1	-7.7%	-22.1%
15	86.2	-4.5%	-6.0%
16	88.5	-4.7%	-3.9%

