



光谱图

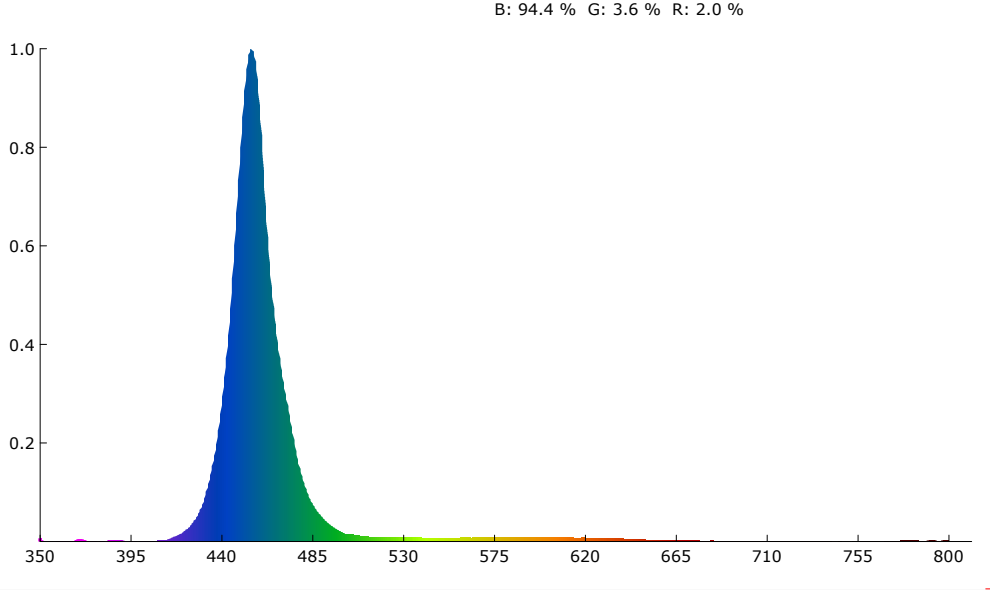

SDCM

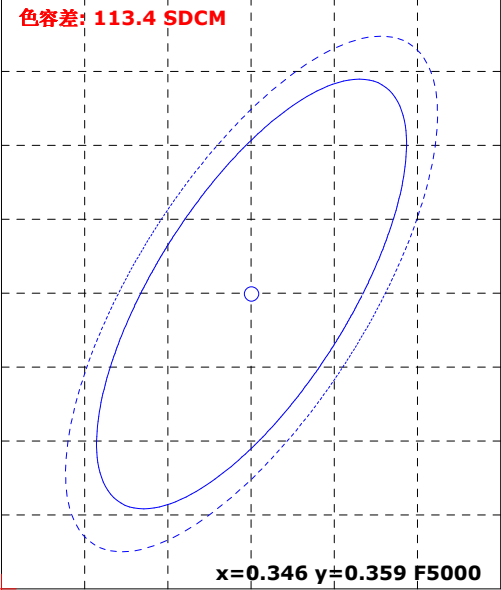

颜色参数:

坐标x: 0.1567 坐标y: 0.0482 坐标u: 0.1920 坐标v: 0.0886 坐标u': 0.1920 坐标v': 0.1329
红色比: 2.0 % 绿色比: 3.6 % 蓝色比: 94.4 % 光通量红色比: 5.9 % 光通量绿色比: 34.5 % 光通量蓝色比: 59.7 %

显色指数: -31.9 AvgR: -29.9
R1: 65.6 R2: -34.3 R3: -99.0 R4: -75.1 R5: 64.3 R6: -26.6 R7: -53.8 R8: -30.5
R9: -44.8 R10: -99.0 R11: -87.7 R12: -77.0 R13: 26.8 R14: -33.9 R15: 55.9


色温: 99999 K	光通量: 96.313 lm	峰值波长: 455.4 nm	色容差: 113.4
明暗视觉比: 14.4	中心波长: 455.3 nm	主波长: 459.5 nm	质心波长: 465.3 nm
半宽度: 20.0 nm	色偏差: 0.15807	色纯度: 93.7 %	色质指数: 0.6
LER(TM-30): 60.7	辐射功率: 1585.9 mw	色域指数(Rg): 148.3	逼真度(Rf): 44.1
红光辐射功率: 31.6 mw	近红辐射功率: 7.6 mw	远红辐射功率: 3.4 mw	

电参数:

光效: 1.6 Lm/W	能效: 1.7	能效等级: G	
电压: 219.7 V	电流: 0.453 A	功率: 61.290 W	功率因素: 0.616

产品型号:	制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号:	测试单位:
测试人员:	测试日期:03/19/14
备注:	

Rf: 44.1 CCT: 99999K u': 0.1920
Rg: 148.3 LER: 60.7 Duv: 0.15807 v': 0.1329

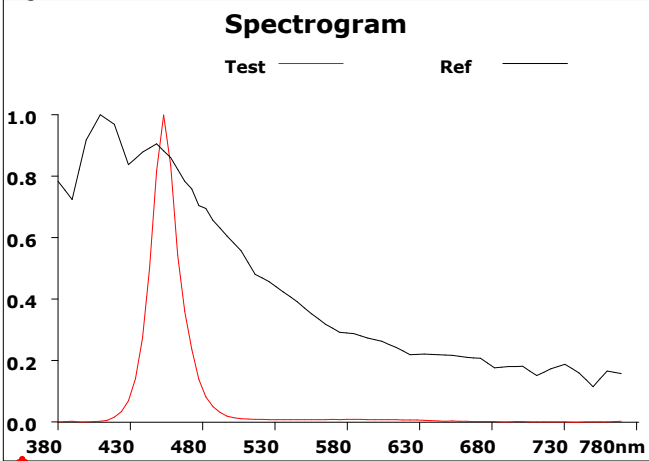

500			
Hue Bin	Rf	Chroma	Hue
1	48.5	22.7%	-5.8%
2	47.6	17.3%	-8.7%
3	68.9	10.5%	-7.3%
4	52.3	9.2%	-12.0%
5	46.0	4.1%	8.5%
6	57.3	19.5%	16.3%
7	56.7	20.8%	16.3%
8	26.2	53.1%	5.1%
9	11.9	49.1%	-23.9%
10	17.5	39.1%	-32.8%
11	21.7	23.7%	-21.9%
12	55.1	17.1%	-26.4%
13	60.0	15.8%	12.6%
14	35.0	19.3%	13.9%
15	65.9	9.6%	-16.4%
16	33.0	33.9%	4.8%

