



光谱图

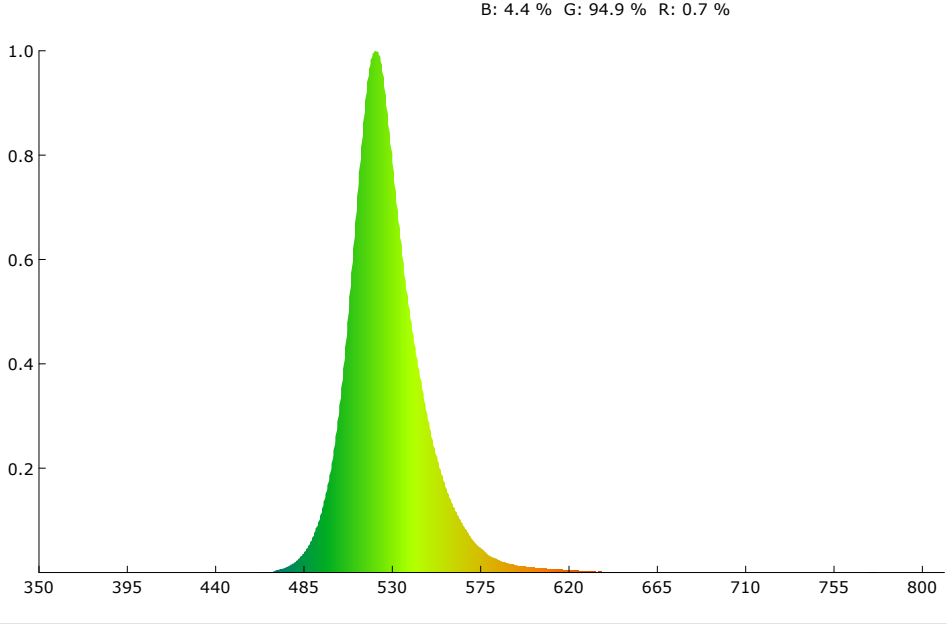

SDCM

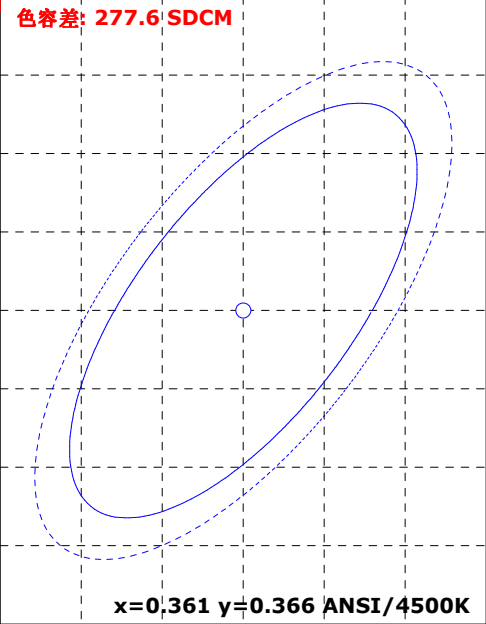

颜色参数:

坐标x: 0.1799 坐标y: 0.7346 坐标u: 0.0628 坐标v: 0.3848 坐标u': 0.0628 坐标v': 0.5772
红色比: 0.7 % 绿色比: 94.9 % 蓝色比: 4.4 % 光通量红色比: 0.4 % 光通量绿色比: 99.3 % 光通量蓝色比: 0.3 %


显色指数: -27.8 AvgR: -39.8
R1: -34.6 R2: -13.0 R3: -31.2 R4: -71.5 R5: -10.9 R6: -16.6 R7: -10.6 R8: -34.2
R9: -99.0 R10: -99.0 R11: -99.0 R12: -35.6 R13: -41.5 R14: 34.0 R15: -33.9

色温: 7606 K 光通量: 732.533 lm 峰值波长: 522.6 nm 色容差: 277.6
明暗视觉比: 2.6 中心波长: 523.6 nm 主波长: 529.7 nm 质心波长: 527.7 nm
半宽度: 30.7 nm 色偏差: 0.15592 色纯度: 84.7 % 色质指数: 0.2
LER(TM-30): 507.9 辐射功率: 1442.3 mw 色域指数(Rg): 6.6 逼真度(Rf): 0.6
红光辐射功率: 10.5 mw 近红辐射功率: 0.3 mw 远红辐射功率: 0.1 mw






电参数:

光效: 12.6 Lm/W 能效: 13.7 能效等级: G
电压: 219.7 V 电流: 0.429 A 功率: 58.070 W 功率因素: 0.615

Rf: 0.6 CCT: 7606K u': 0.0628
Rg: 6.6 LER: 507.9 Duv: 0.15592 v': 0.5772

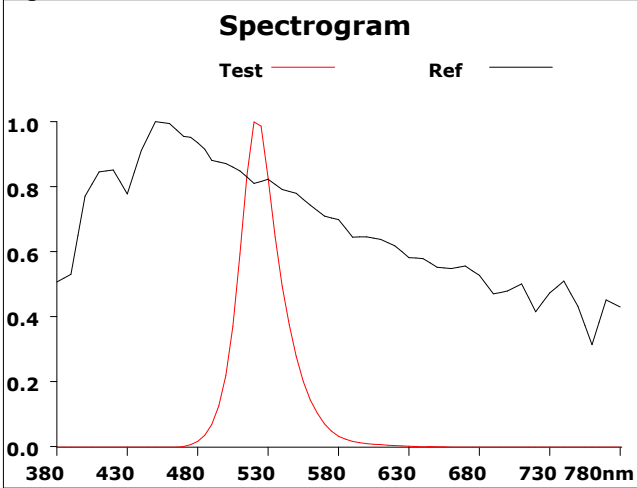

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-82.8%	3.0%
2	0.0	-70.1%	3.9%
3	0.2	-76.9%	-5.5%
4	1.4	-64.3%	-8.7%
5	0.5	-78.2%	-0.4%
6	0.2	-86.8%	5.9%
7	0.1	-80.0%	17.6%
8	0.0	-79.1%	16.3%
9	7.2	-65.7%	32.4%
10	12.4	-51.1%	18.8%
11	1.5	-51.7%	1.2%
12	28.8	-46.5%	-21.1%
13	14.0	-62.8%	-22.7%
14	0.2	-71.9%	-30.4%
15	1.5	-82.8%	-30.6%
16	0.0	-80.9%	-9.2%

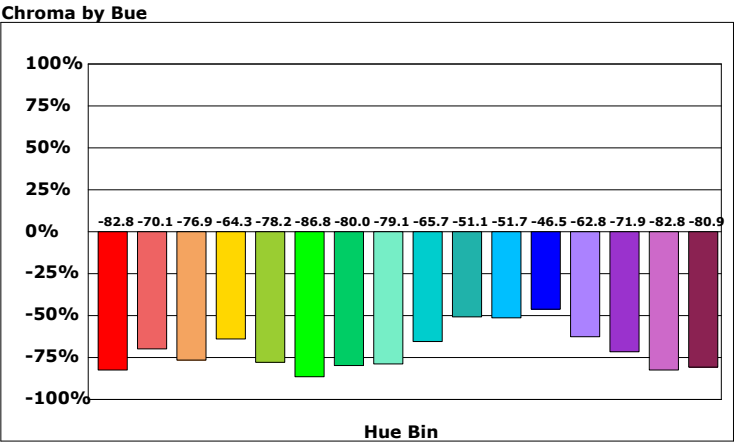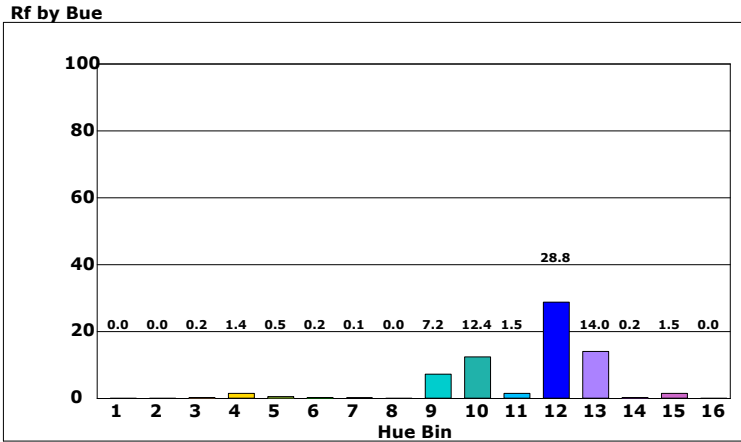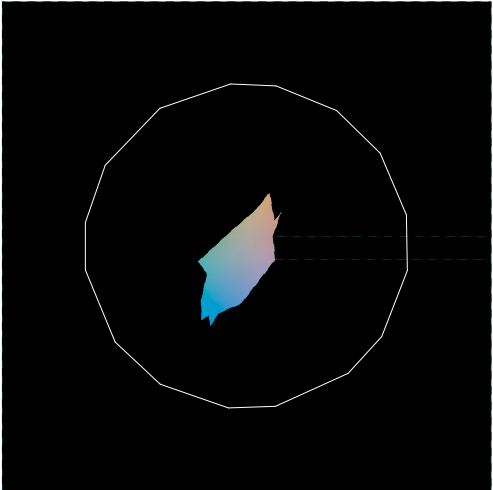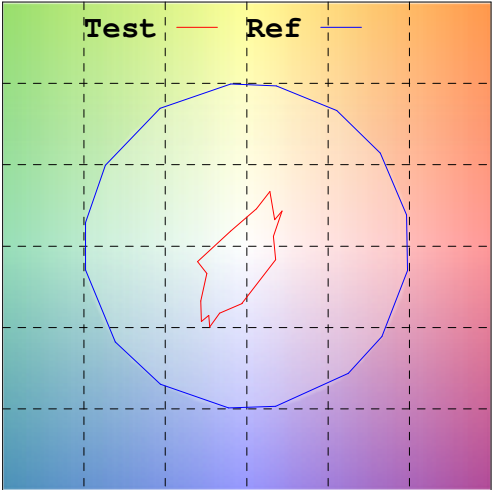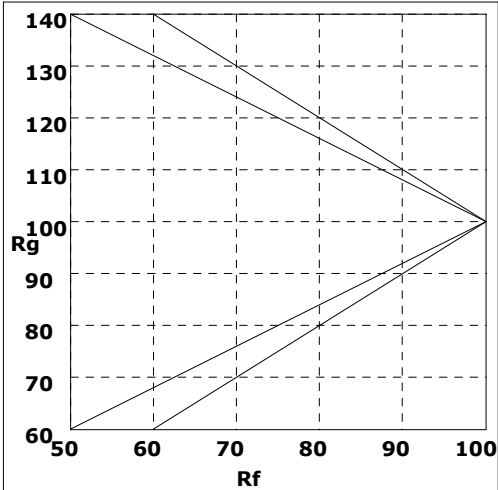

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/19/14

