



光谱图

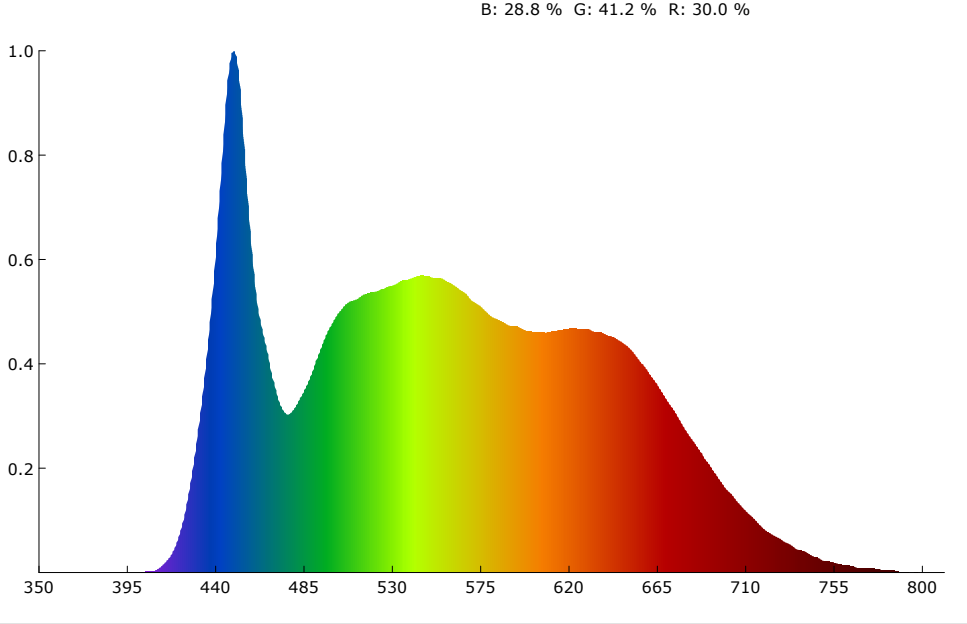

SDCM

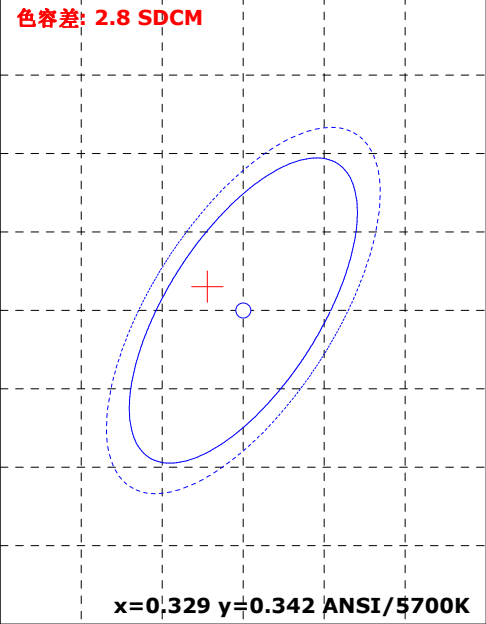

颜色参数:

坐标x: 0.3265 坐标y: 0.3432 坐标u: 0.2020 坐标v: 0.3185 坐标u': 0.2020 坐标v': 0.4778
红色比: 30.0 % 绿色比: 41.2 % 蓝色比: 28.8 % 光通量红色比: 15.2 % 光通量绿色比: 81.1 % 光通量蓝色比: 3.7 %

显色指数: 92.7 AvgR: 90.2
R1: 93.3 R2: 92.9 R3: 91.0 R4: 93.3 R5: 92.9 R6: 89.3 R7: 95.2 R8: 93.8
R9: 80.7 R10: 82.8 R11: 92.8 R12: 73.5 R13: 92.9 R14: 95.0 R15: 93.7


色温: 5763 K 光通量: 702.961 lm 峰值波长: 449.6 nm 色容差: 2.8
明暗视觉比: 2.2 中心波长: 450.4 nm 主波长: 512.3 nm 质心波长: 557.1 nm
半宽度: 23.7 nm 色偏差: 0.00377 色纯度: 2.2 % 色质指数: 92.0
LER(TM-30): 281.9 辐射功率: 2493.3 mw 色域指数(Rg): 100.7 逼真度(Rf): 90.7
红光辐射功率: 724.6 mw 近红辐射功率: 80.1 mw 远红辐射功率: 1.0 mw

电参数:





光效: 20.4 Lm/W 能效: 22.2 能效等级: G
电压: 222.4 V 电流: 0.271 A 功率: 34.460 W 功率因素: 0.571

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:


Rf: 90.7 CCT: 5763K u': 0.0202
Rg: 100.7 LER: 281.9 Duv: 0.00377 v': 0.4778

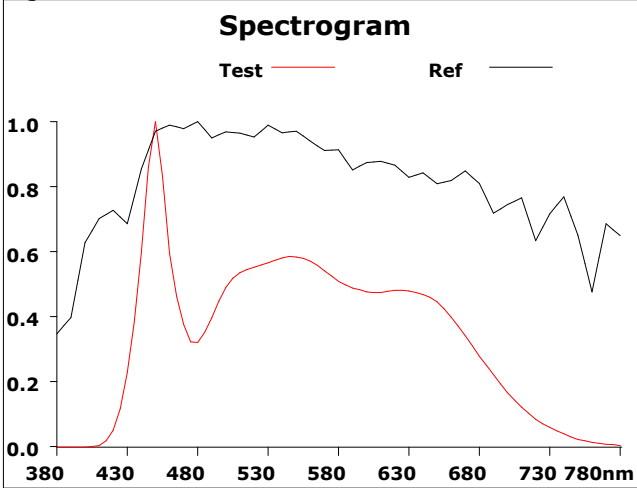


500			
Hue Bin	Rf	Chroma	Hue
1	92.2	-2.6%	-1.3%
2	94.6	-2.4%	1.2%
3	90.7	-1.4%	4.1%
4	91.8	-0.2%	3.8%
5	90.1	0.4%	2.7%
6	95.4	2.4%	0.2%
7	96.4	-0.4%	-1.5%
8	93.5	-2.9%	-0.7%
9	91.8	-4.5%	4.2%
10	85.7	-2.9%	7.4%
11	80.7	1.1%	10.9%
12	89.9	2.2%	5.8%
13	92.2	5.7%	2.4%
14	91.5	4.1%	-1.5%
15	84.8	9.0%	-9.0%
16	93.2	-0.1%	-3.5%

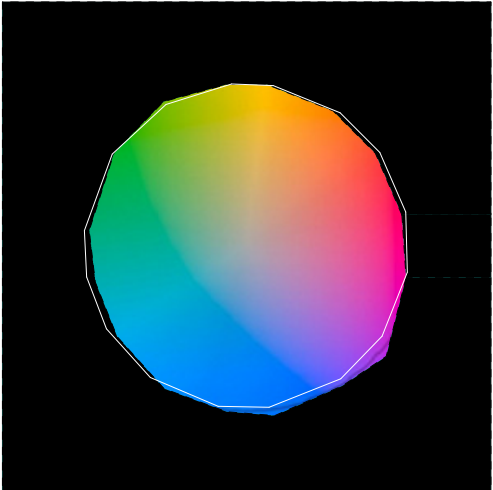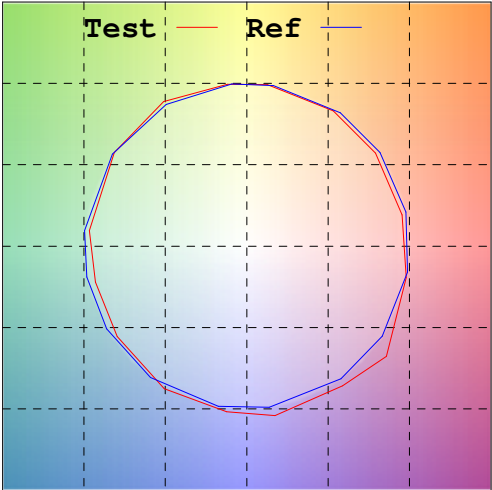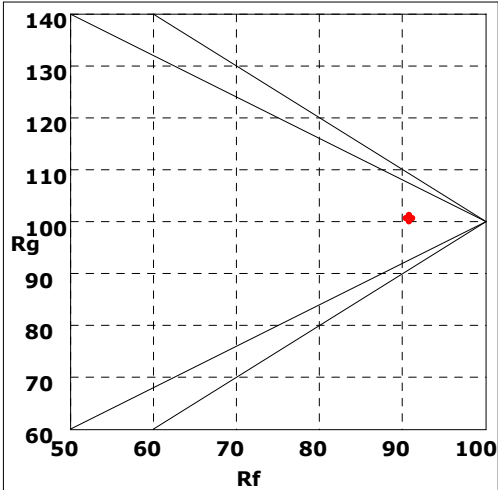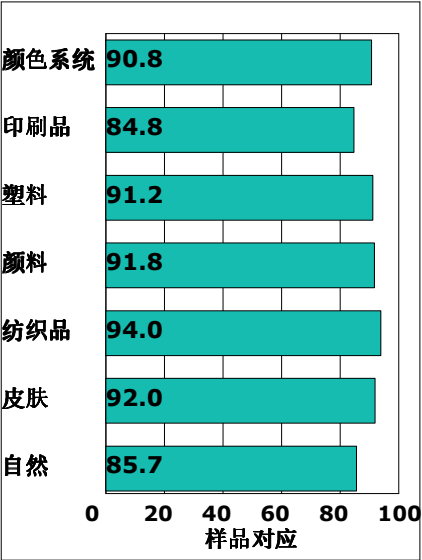




Rf by Bue

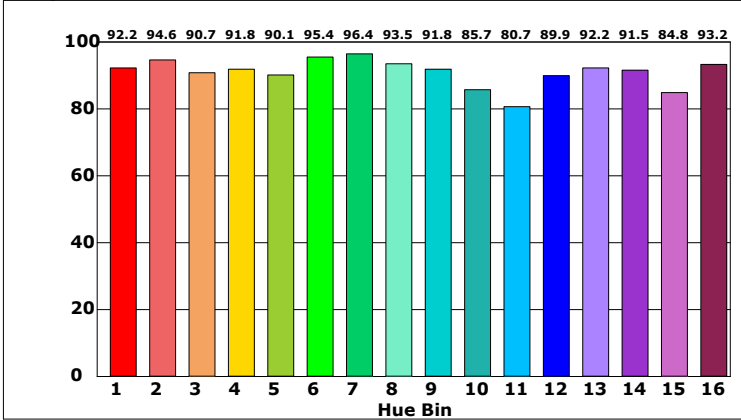

Chroma by Bue

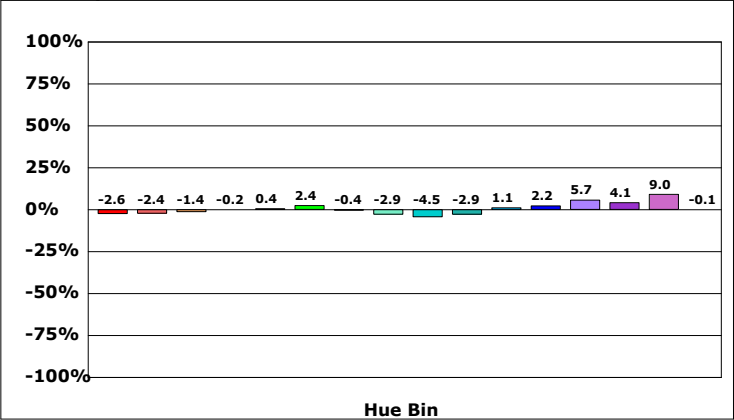

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:

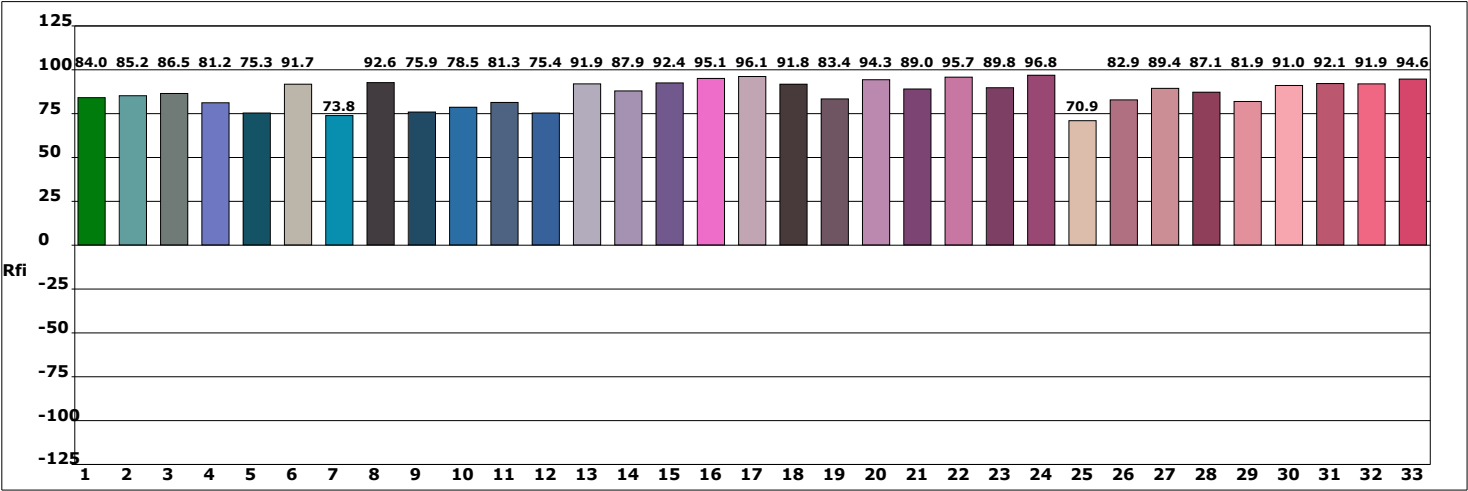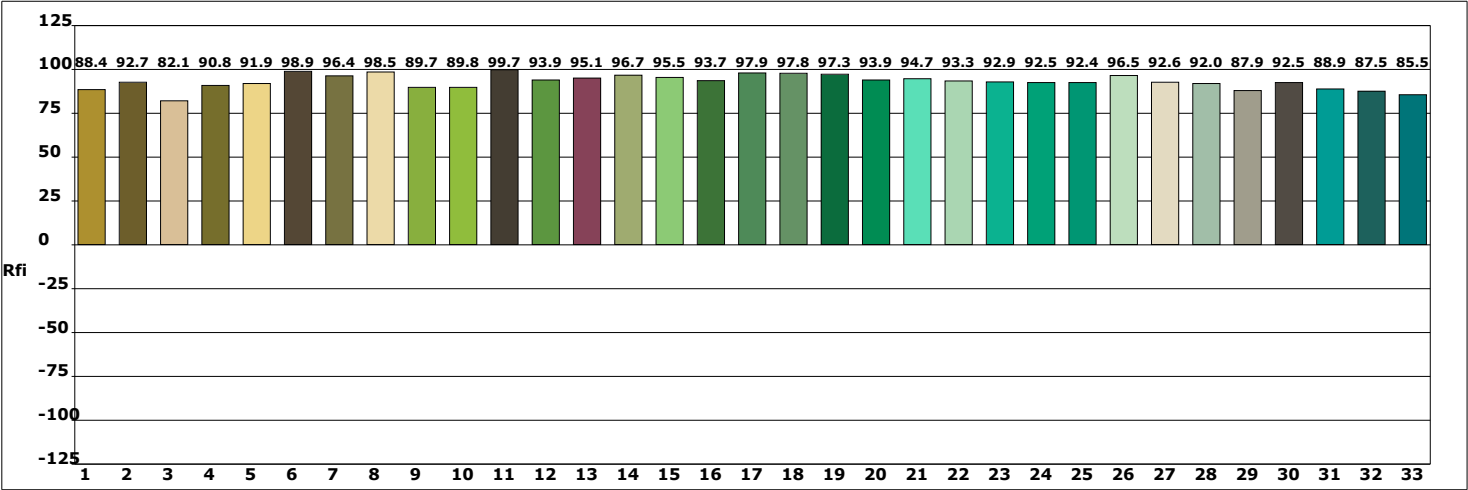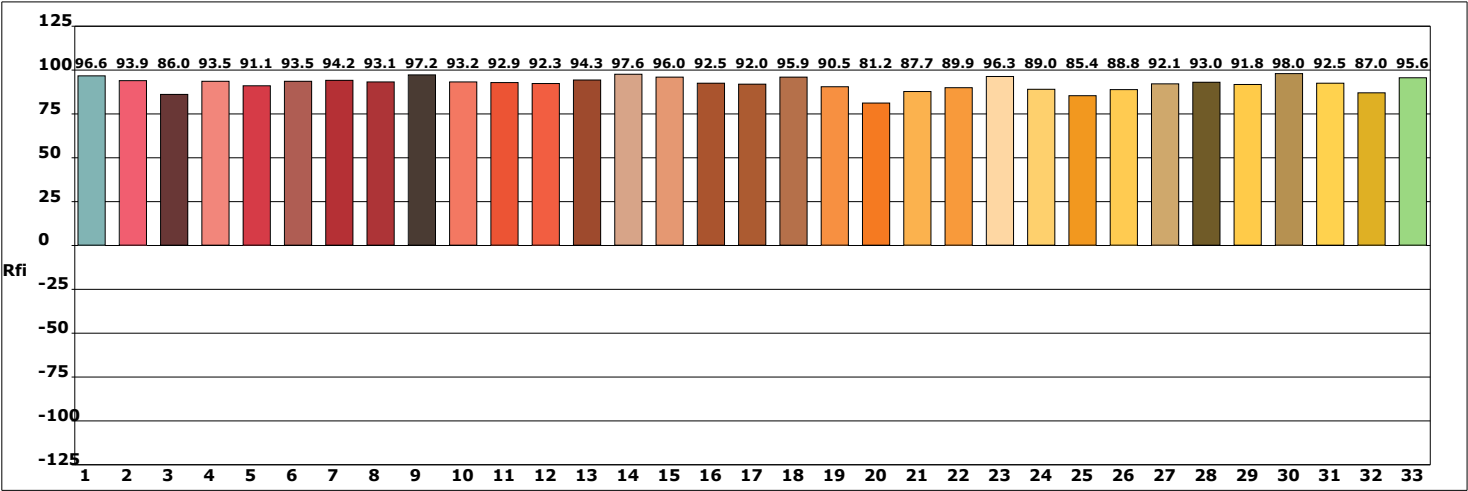

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/11/23