



光谱图

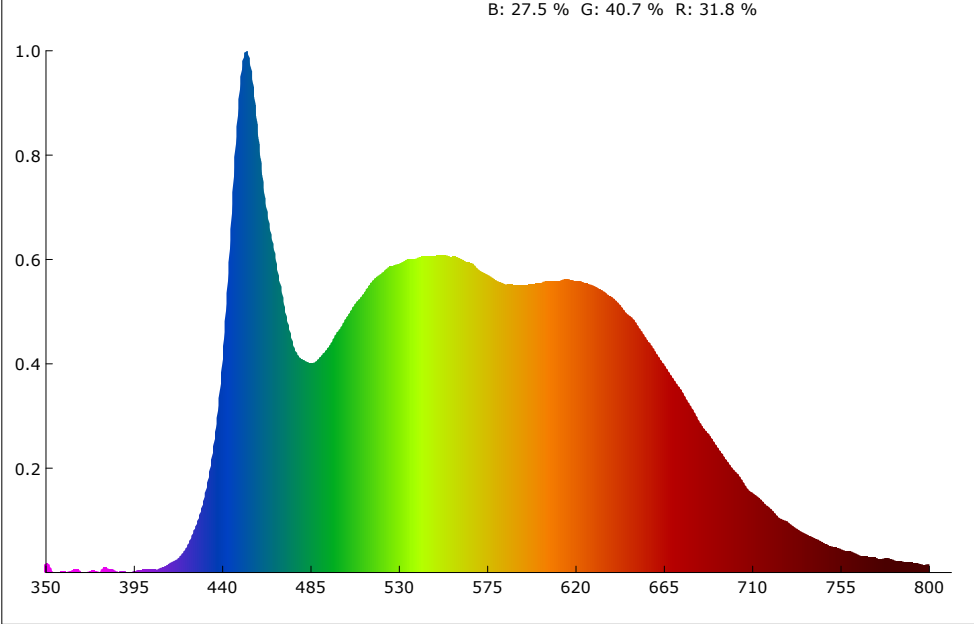

SDCM

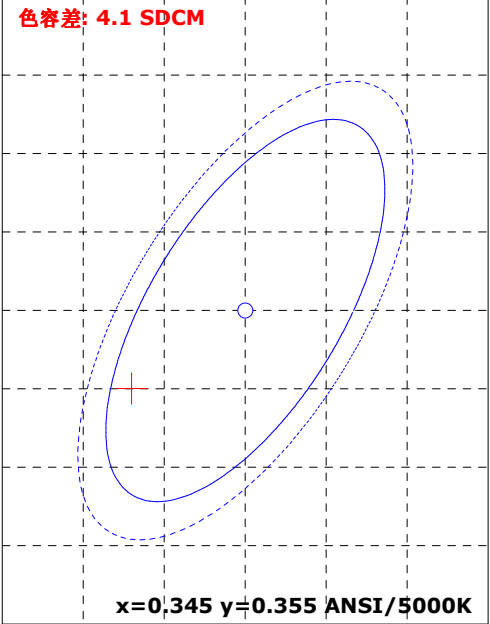

颜色参数:

坐标x: 0.3377 坐标y: 0.3503 坐标u: 0.2069 坐标v: 0.3220 坐标u': 0.2069 坐标v': 0.4830
红色比: 31.8 % 绿色比: 40.7 % 蓝色比: 27.5 % 光通量红色比: 16.3 % 光通量绿色比: 79.7 % 光通量蓝色比: 4.0 %

显色指数: 94.7 AvgR: 92.3
R1: 95.6 R2: 97.1 R3: 95.8 R4: 94.0 R5: 93.5 R6: 92.6 R7: 96.7 R8: 92.8
R9: 81.0 R10: 91.0 R11: 93.7 R12: 72.2 R13: 96.5 R14: 97.5 R15: 94.8


色温: 5287 K 光通量: 3725.751 lm 峰值波长: 453.3 nm 色容差: 4.1
明暗视觉比: 2.1 中心波长: 457.4 nm 主波长: 564.0 nm 质心波长: 563.4 nm
半宽度: 30.4 nm 色偏差: 0.00244 色纯度: 6.5 % 色质指数: 91.5
LER(TM-30): 281.4 辐射功率: 13238.0 mw 色域指数(Rg): 98.6 逼真度(Rf): 90.4
红光辐射功率: 4003.2 mw 近红辐射功率: 591.3 mw 远红辐射功率: 38.2 mw

电参数:





光效: 36.5 Lm/W 能效: 39.7 能效等级: G
电压: 218.9 V 电流: 0.719 A 功率: 102.200 W 功率因素: 0.648

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:03/15/24
备注:


Rf: 90.4 CCT: 5287K u': 0.2069
Rg: 98.6 LER: 281.4 Duv: 0.00244 v': 0.4830

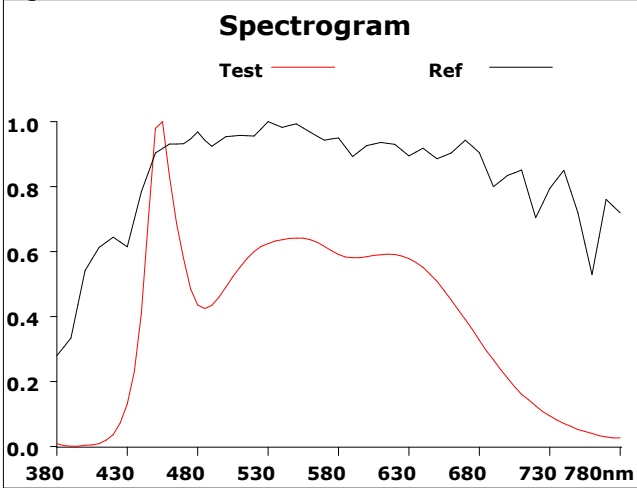


500			
Hue Bin	Rf	Chroma	Hue
1	90.5	-3.2%	0.5%
2	94.4	-1.7%	0.8%
3	92.8	-1.1%	2.5%
4	92.0	-2.0%	0.7%
5	91.5	-3.5%	0.3%
6	95.8	-1.1%	-0.2%
7	93.3	-3.6%	0.7%
8	89.9	-3.8%	3.6%
9	87.7	-3.6%	9.4%
10	83.0	-1.0%	9.6%
11	83.0	3.2%	9.0%
12	94.7	2.7%	1.6%
13	92.6	4.2%	-1.8%
14	92.9	1.4%	-2.9%
15	83.2	6.3%	-10.4%
16	92.8	-1.2%	-2.7%

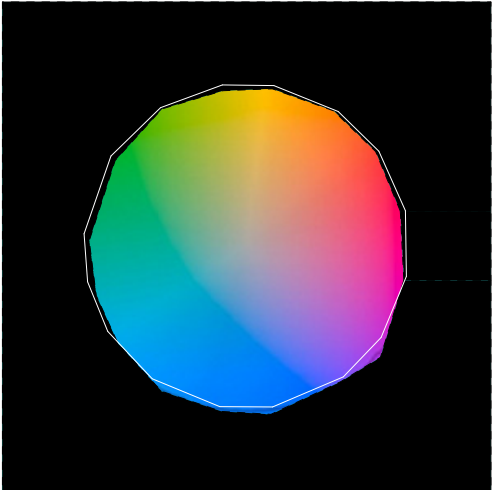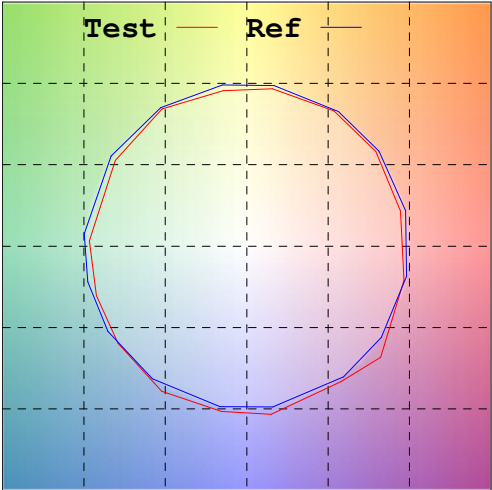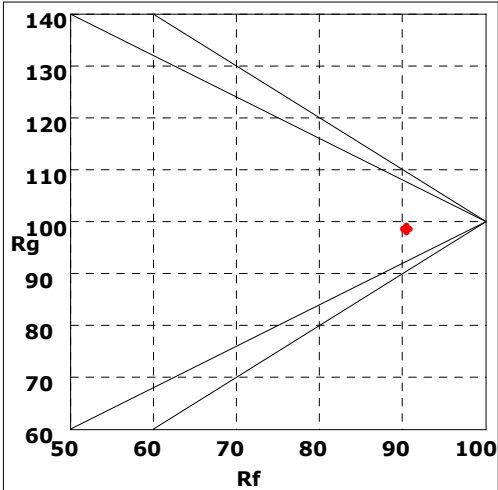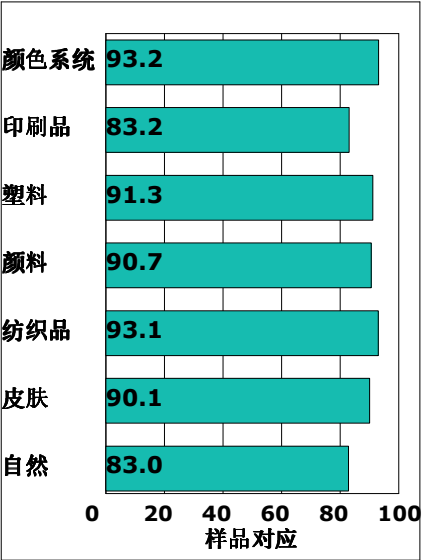




Rf by Bue

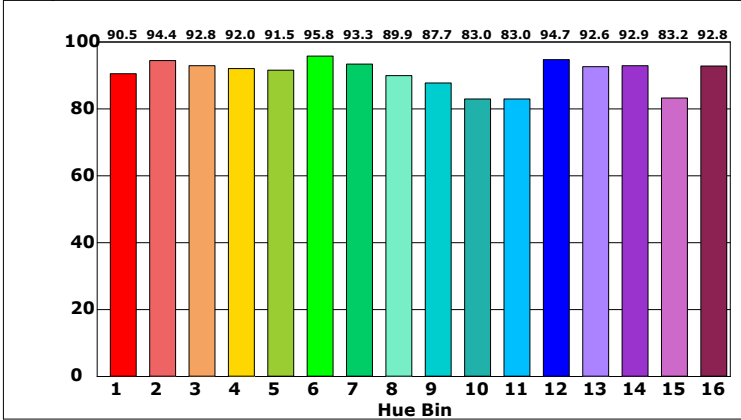

Chroma by Bue

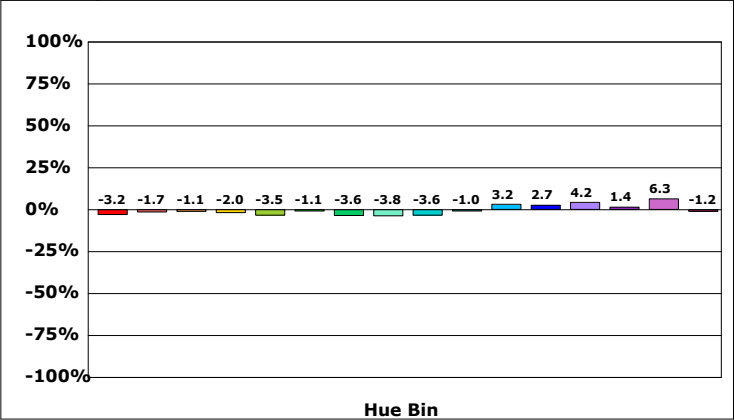

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:03/15/24
备注:

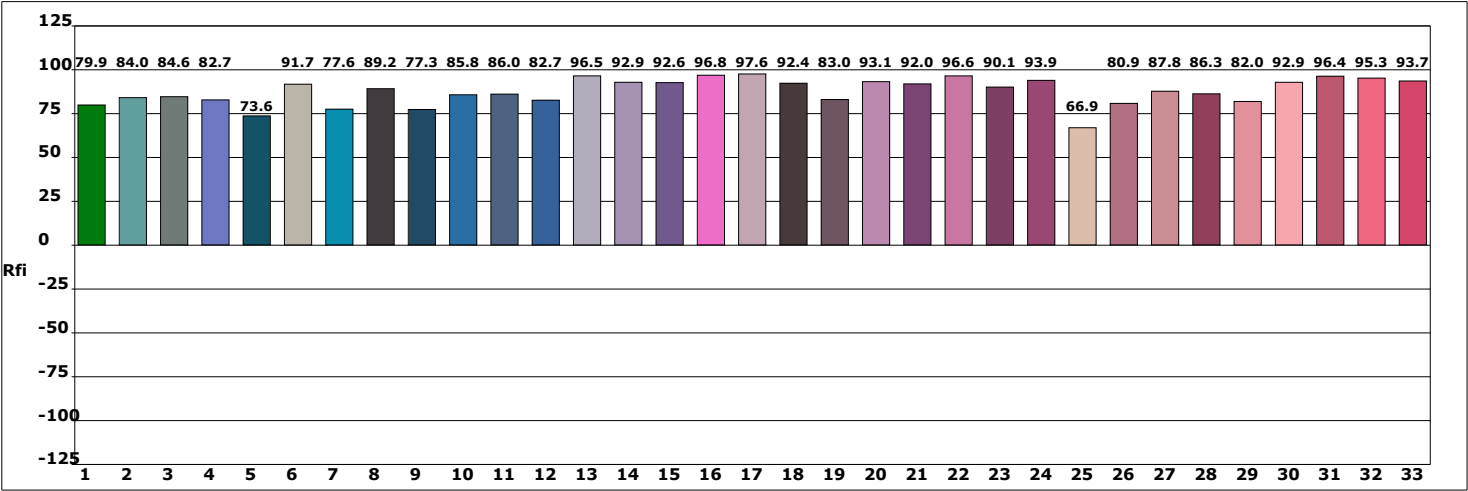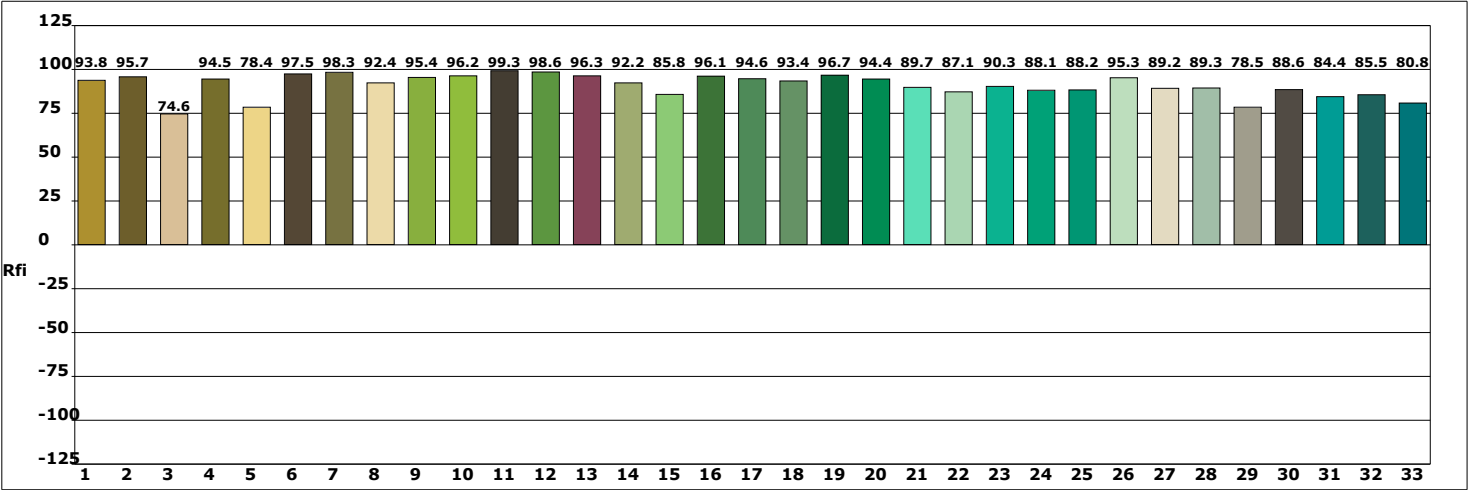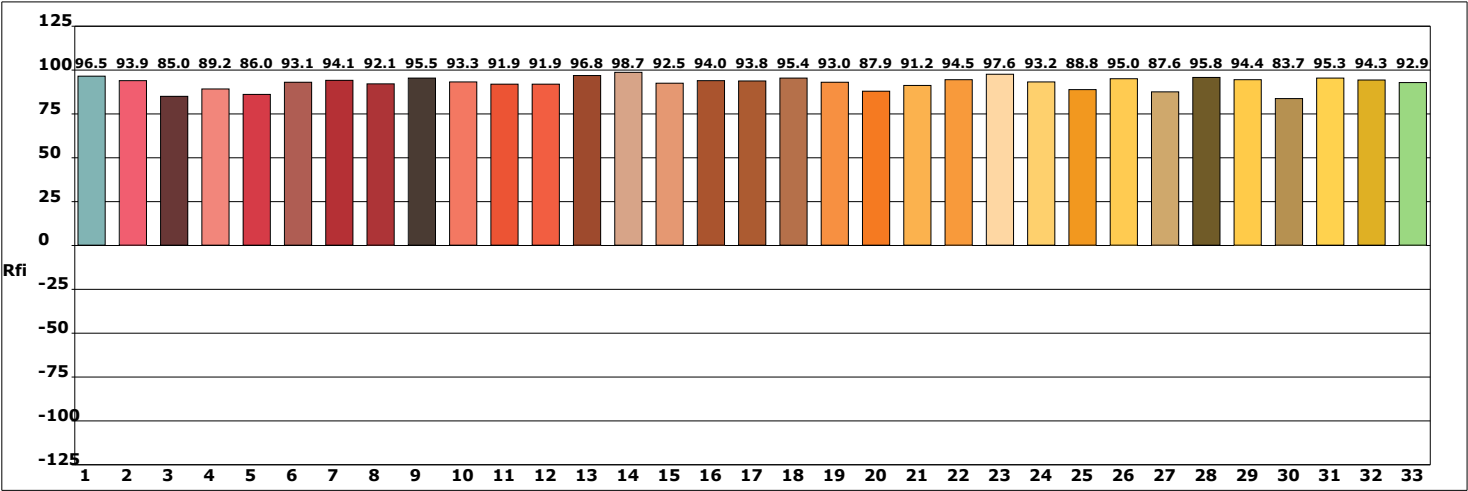

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:03/15/24