



Event 200T is a 200Watt WW + 200Watt CW powered LED fresnel with zoom function. The RDM-DMX compliant, 25° - 65°manual zoom along with it’s superior 95 CRI make this fixture a good replacement for the tradi-tional fresnels. A fixture designed for ehbitons.


Key features:

- 200Watt WW + 200W CW COB white LED
- 2700K - 6000K tunable color temperature
- Average R9≥95, TLCI 97
- Soft and even wash effect
- 25° - 65° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in connection


Application:

- Broadcast, HD studio
- Theatre, church
- Film shooting
- Museum
- Exhibition lighting


Accessories:



Barn door



Gel frame

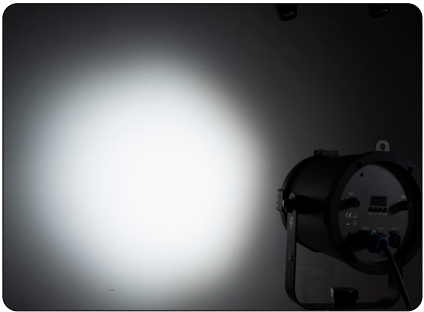


EVENT 200T

200W tunable LED fresnel manual zoom

Photometric


WW(lx)	23300	6950	2650	1620	1120
CW(lx)	33200	10100	3880	2340	1560
Full on(lx)	19300	5910	2280	1380	938

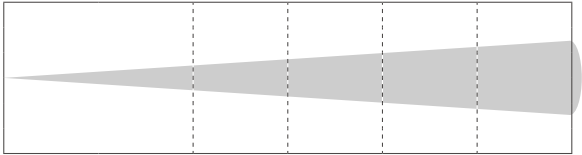

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.55	1.11	1.66	2.22	2.77

Min. Spot - 25°


Color Rendition - 4000K

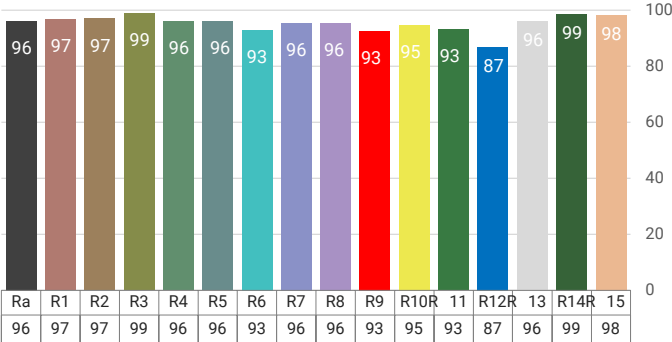

Technical Data


Power supply:	AC100-240V, 50/60Hz
Light source:	200Watt WW + 200W CW LED
Color temperature:	2700K - 6000K
Zoom range:	25° - 65° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Knob, DMX and RDM controls

WW(lx)	5970	1930	747	457	373
CW(lx)	9150	2800	1070	648	558
Full on(lx)	4680	1580	621	361	240

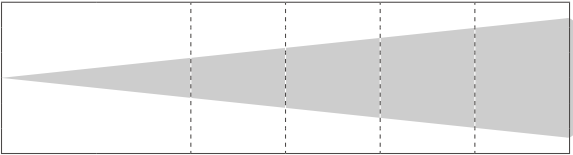

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.7	3.4	5.1	6.8	8.5

Max. Spot - 65°

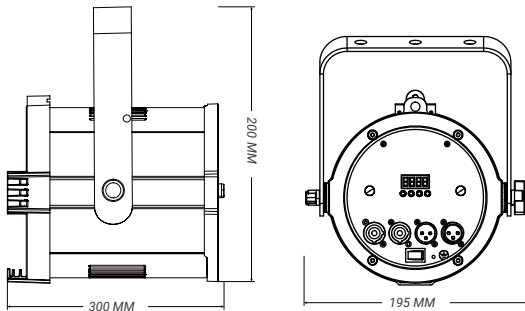

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	300 x 200 x 195mm
N.W.:	3.5 kg(barn door incl.)
G.W.:	6kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Environment:	IP20