



光谱图

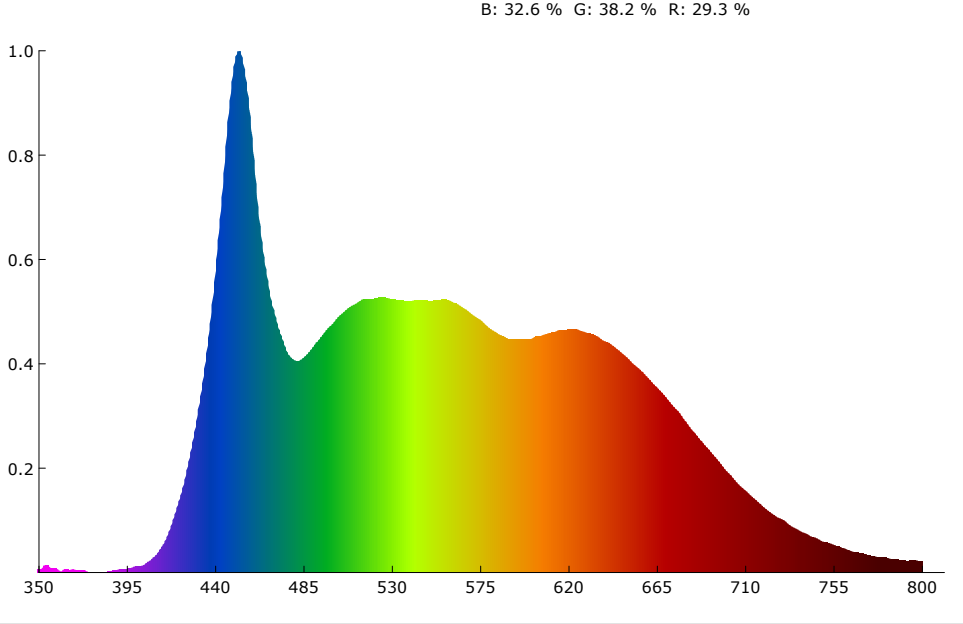

SDCM

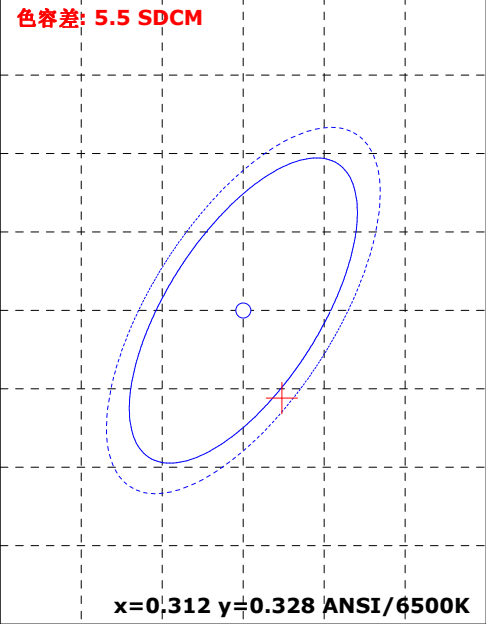

颜色参数:

坐标x: 0.3147 坐标y: 0.3226 坐标u: 0.2017 坐标v: 0.3101 坐标u': 0.2017 坐标v': 0.4651
红色比: 29.3 % 绿色比: 38.2 % 蓝色比: 32.6 % 光通量红色比: 15.5 % 光通量绿色比: 79.8 % 光通量蓝色比: 4.7 %

显色指数: 97.2 AvgR: 95.6
R1: 97.5 R2: 98.0 R3: 94.5 R4: 98.3 R5: 97.9 R6: 94.4 R7: 99.1 R8: 98.2
R9: 94.2 R10: 95.0 R11: 96.2 R12: 79.4 R13: 98.6 R14: 96.6 R15: 96.5


色温: 6441 K 光通量: 7002.843 lm 峰值波长: 452.3 nm 色容差: 5.5
明暗视觉比: 2.4 中心波长: 454.7 nm 主波长: 483.9 nm 质心波长: 557.1 nm
半宽度: 31.9 nm 色偏差: -0.00119 色纯度: 7.2 % 色质指数: 92.0
LER(TM-30): 258.5 辐射功率: 27092.2 mw 色域指数(Rg): 101.4 逼真度(Rf): 92.8
红光辐射功率: 7480.2 mw 近红辐射功率: 1370.8 mw 远红辐射功率: 103.3 mw

电参数:





光效: 29.0 Lm/W 能效: 31.5 能效等级: G
电压: 219.3 V 电流: 1.554 A 功率: 241.800 W 功率因素: 0.719

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/29/14
备注:


Rf: 92.8 CCT: 6441K u': 0.2017
Rg: 101.4 LER: 258.5 Duv: -0.00119 v': 0.4651

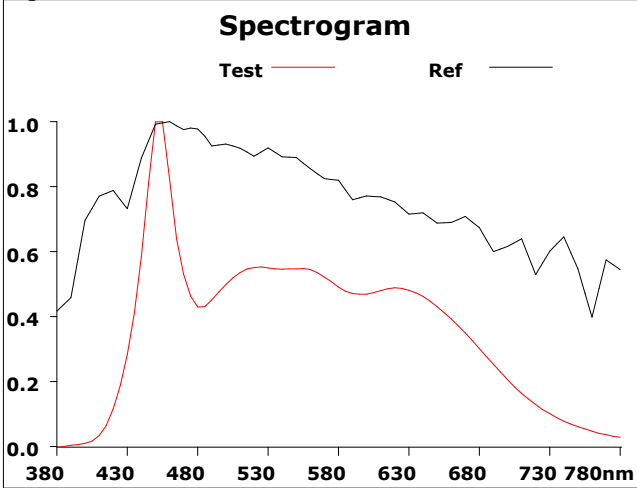

500			
Hue Bin	Rf	Chroma	Hue
1	94.6	-0.2%	0.3%
2	96.6	-0.0%	0.9%
3	94.7	0.1%	1.2%
4	94.5	-0.5%	1.5%
5	91.8	-2.4%	0.4%
6	96.4	-0.2%	0.6%
7	97.6	-0.6%	0.3%
8	93.8	-1.5%	2.8%
9	91.4	-1.7%	6.7%
10	85.7	-0.4%	8.1%
11	85.3	2.6%	8.0%
12	93.6	2.1%	3.4%
13	94.2	4.1%	1.9%
14	94.4	2.4%	0.4%
15	86.4	9.5%	-5.7%
16	97.1	0.4%	-0.3%

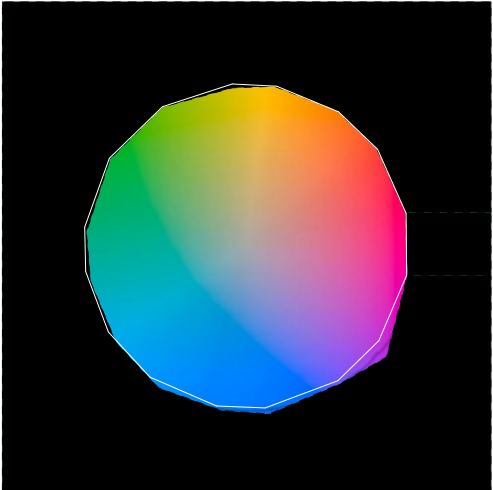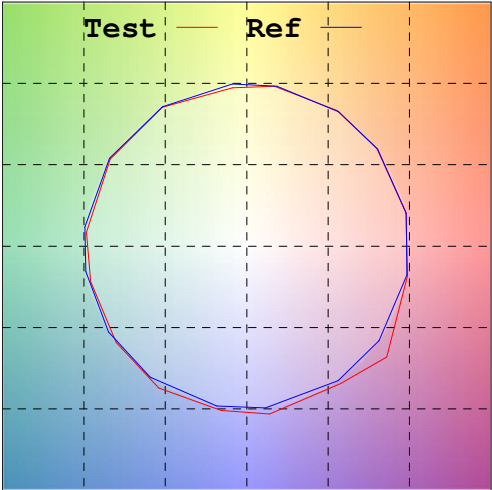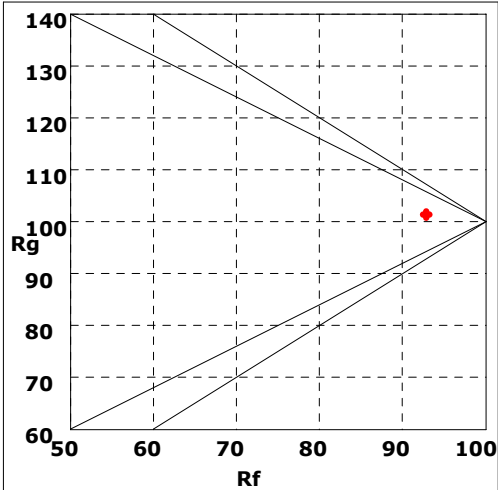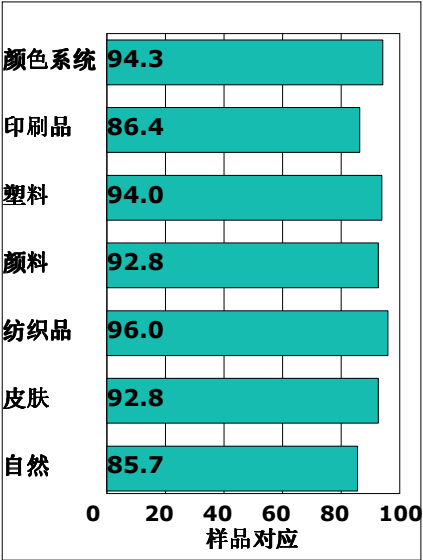

Rf by Bue

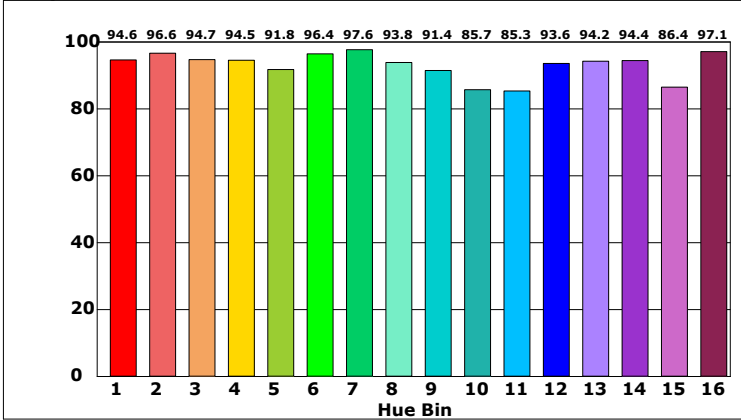

Chroma by Bue

