



光谱图

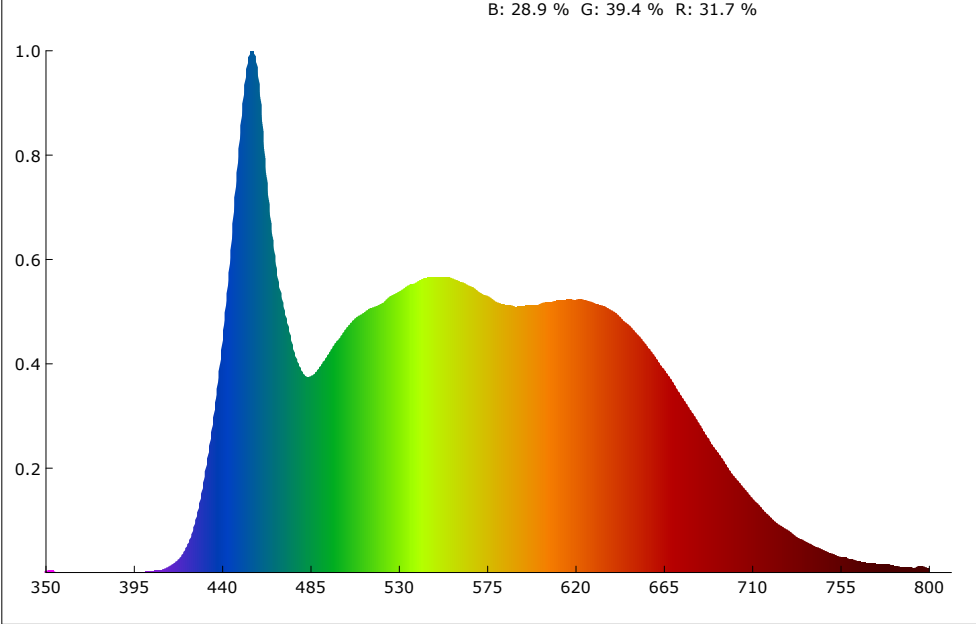

SDCM

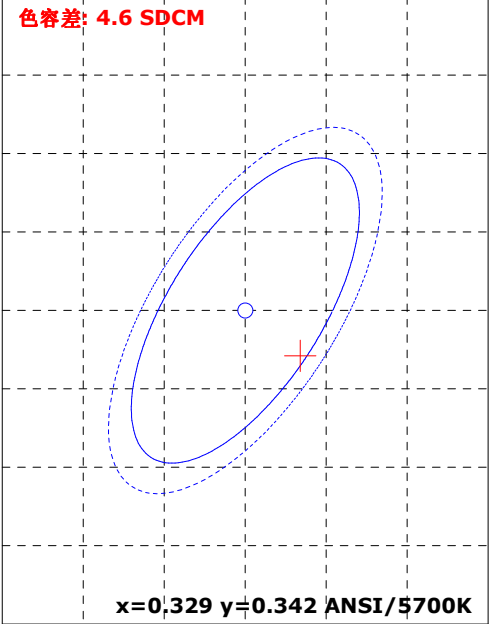

颜色参数:

坐标x: 0.3321 坐标y: 0.3388 坐标u: 0.2075 坐标v: 0.3176 坐标u': 0.2075 坐标v': 0.4764
红色比: 31.7 % 绿色比: 39.4 % 蓝色比: 28.9 % 光通量红色比: 16.4 % 光通量绿色比: 79.3 % 光通量蓝色比: 4.3 %

显色指数: 96.3 AvgR: 94.8
R1: 97.3 R2: 98.3 R3: 95.6 R4: 96.2 R5: 95.6 R6: 93.6 R7: 97.5 R8: 96.8
R9: 93.5 R10: 94.5 R11: 95.9 R12: 74.3 R13: 98.9 R14: 97.3 R15: 97.3


色温: 5513 K 光通量: 4078.257 lm 峰值波长: 455.4 nm 色容差: 4.6
明暗视觉比: 2.2 中心波长: 456.8 nm 主波长: 542.0 nm 质心波长: 561.1 nm
半宽度: 29.8 nm 色偏差: -0.00098 色纯度: 1.3 % 色质指数: 89.6
LER(TM-30): 274.3 辐射功率: 14870.0 mw 色域指数(Rg): 99.6 逼真度(Rf): 90.7
红光辐射功率: 4511.5 mw 近红辐射功率: 588.1 mw 远红辐射功率: 26.4 mw

电参数:





光效: 21.8 Lm/W 能效: 23.8 能效等级: G
电压: 223.6 V 电流: 0.874 A 功率: 186.700 W 功率因素: 0.955

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:


Rf: 90.7 CCT: 5513K u': 0.2075
Rg: 99.6 LER: 274.3 Duv: -0.00098 v': 0.4764

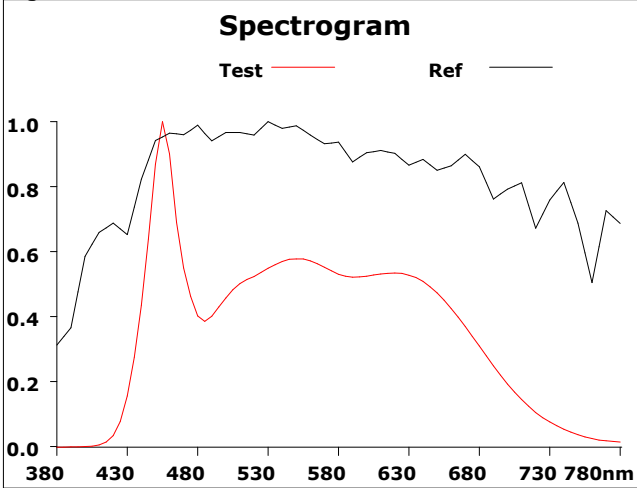


500			
Hue Bin	Rf	Chroma	Hue
1	92.1	-1.9%	0.9%
2	95.0	-0.8%	1.7%
3	93.2	-0.6%	1.7%
4	92.0	-1.7%	0.7%
5	90.6	-3.5%	0.3%
6	96.1	-0.9%	-0.0%
7	93.5	-3.3%	1.2%
8	89.8	-3.1%	4.3%
9	87.5	-2.9%	9.7%
10	82.8	-0.4%	9.7%
11	82.7	3.5%	9.1%
12	94.1	2.7%	2.2%
13	93.4	4.3%	-0.4%
14	94.1	1.6%	-1.5%
15	84.0	8.1%	-8.7%
16	96.0	-1.1%	-0.2%

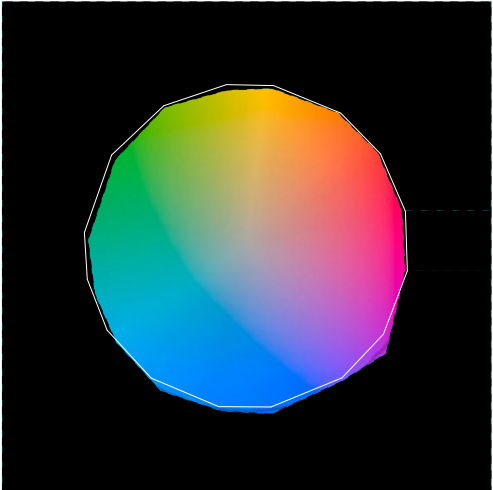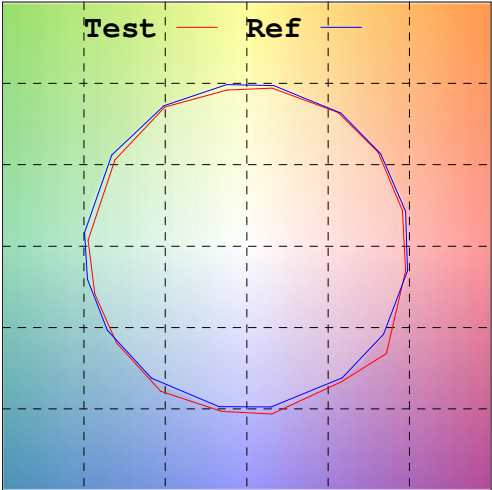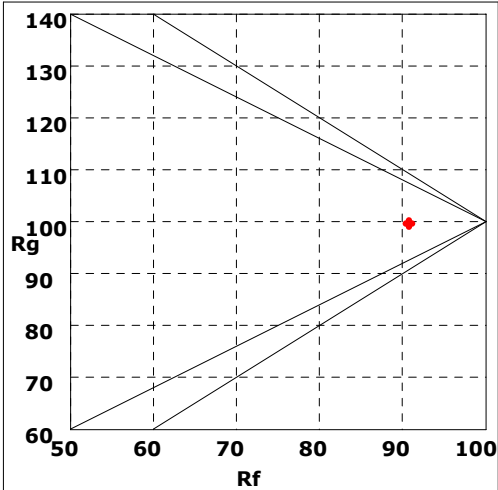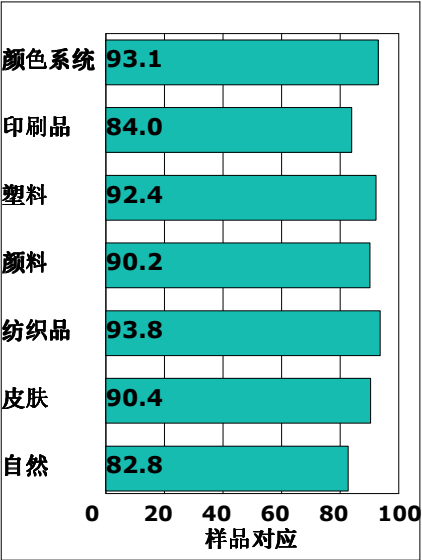




Rf by Bue

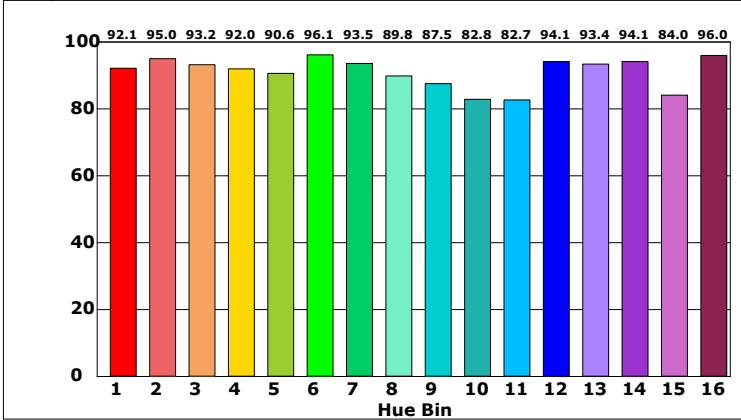

Chroma by Bue

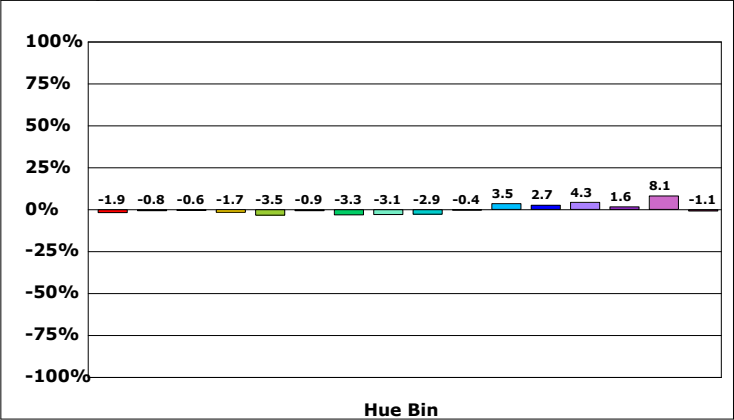


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:

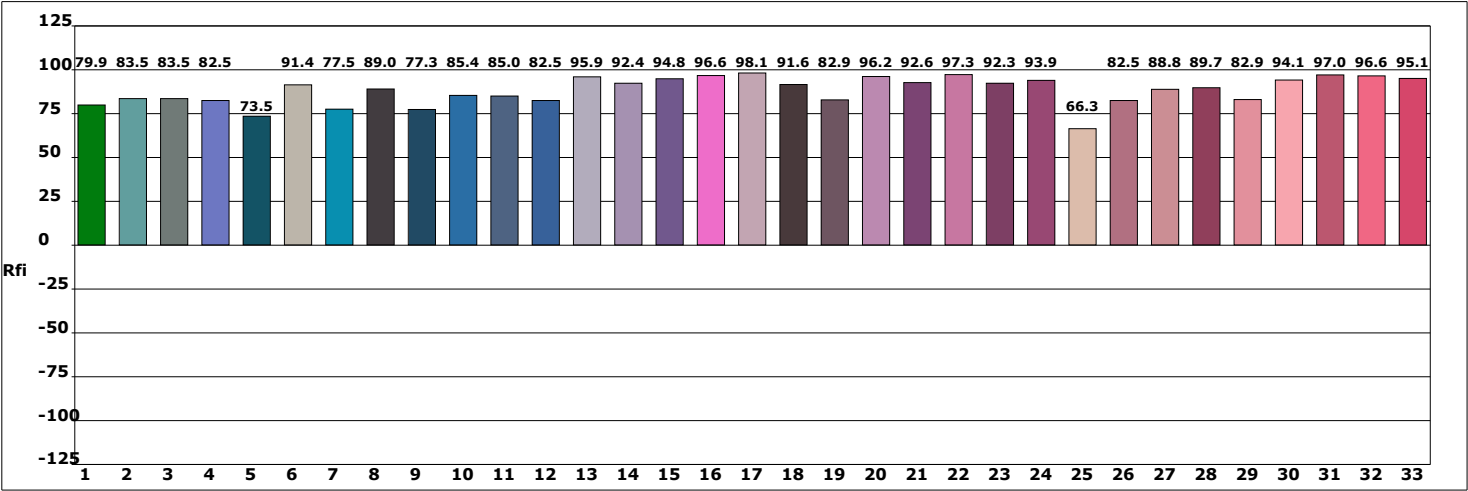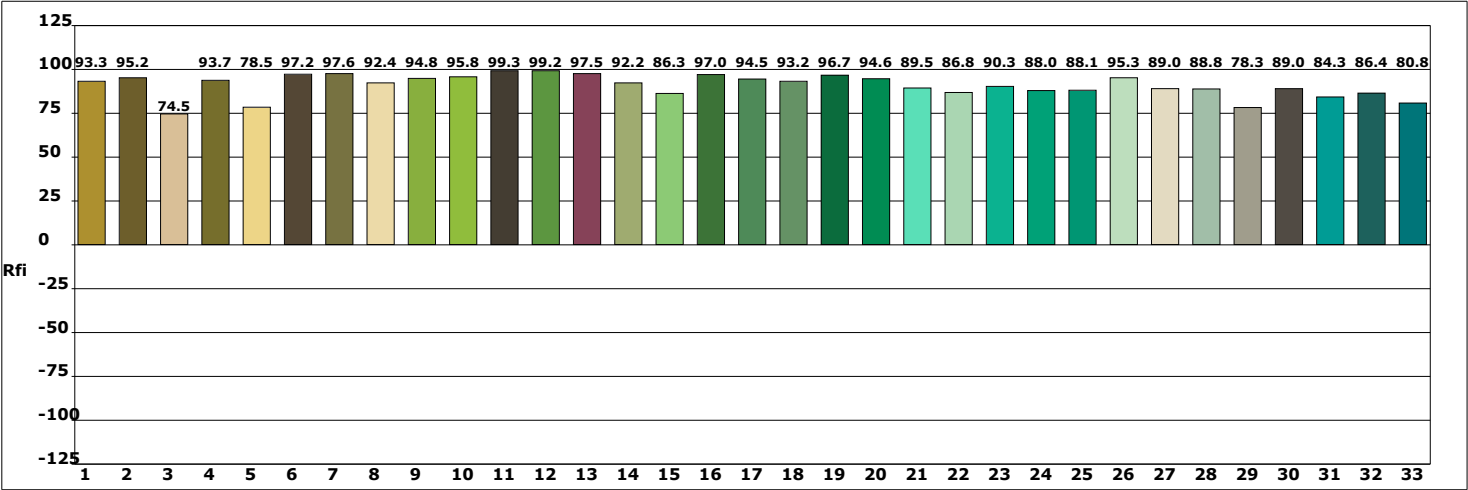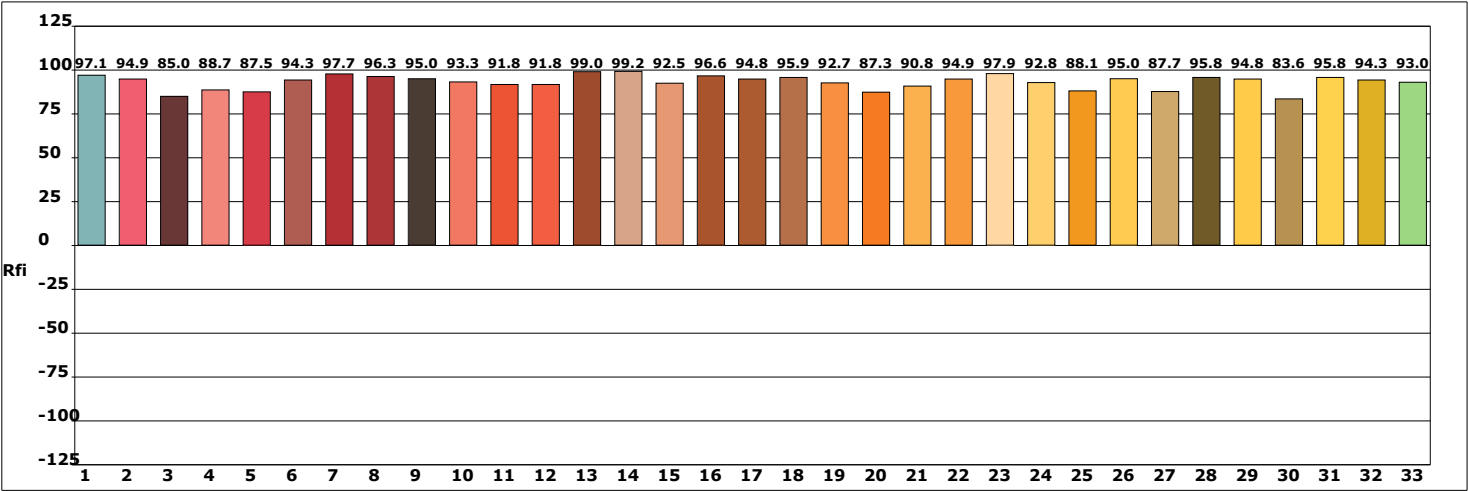


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/11/23

光谱图

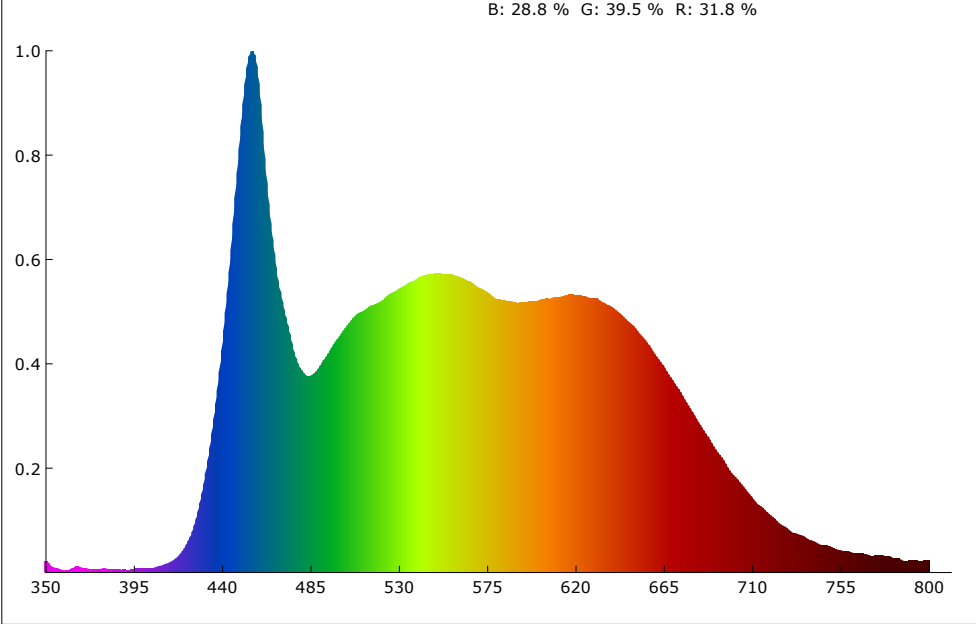

SDCM

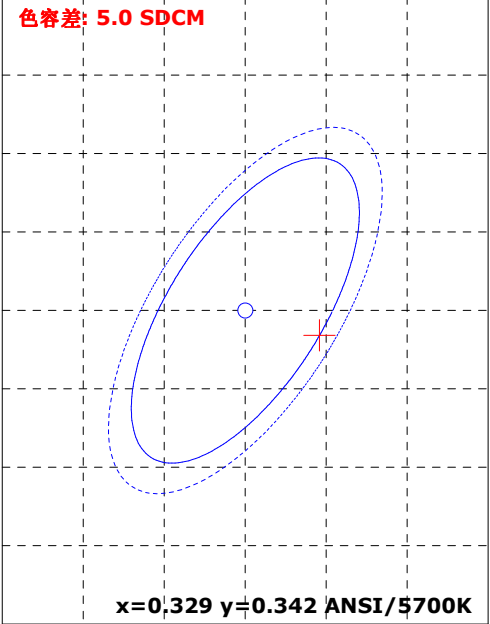

颜色参数:

坐标x: 0.3333 坐标y: 0.3401 坐标u: 0.2078 坐标v: 0.3181 坐标u': 0.2078 坐标v': 0.4772
红色比: 31.8 % 绿色比: 39.5 % 蓝色比: 28.8 % 光通量红色比: 16.5 % 光通量绿色比: 79.3 % 光通量蓝色比: 4.3 %

显色指数: 96.3 AvgR: 94.7
R1: 97.1 R2: 98.1 R3: 95.6 R4: 96.0 R5: 95.7 R6: 93.9 R7: 97.5 R8: 96.5
R9: 92.7 R10: 94.3 R11: 95.7 R12: 74.6 R13: 98.6 R14: 97.3 R15: 97.6


色温: 5465 K 光通量: 5435.542 lm 峰值波长: 455.4 nm 色容差: 5.0
明暗视觉比: 2.2 中心波长: 457.0 nm 主波长: 554.0 nm 质心波长: 562.1 nm
半宽度: 30.0 nm 色偏差: -0.00087 色纯度: 2.0 % 色质指数: 89.7
LER(TM-30): 272.3 辐射功率: 19959.7 mw 色域指数(Rg): 99.6 逼真度(Rf): 90.8
红光辐射功率: 6023.1 mw 近红辐射功率: 868.7 mw 远红辐射功率: 73.1 mw

电参数:







光效: 31.0 Lm/W 能效: 33.7 能效等级: G
电压: 222.6 V 电流: 0.827 A 功率: 175.600 W 功率因素: 0.954

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:




Rf: 90.8 CCT: 5465K u': 0.2078
Rg: 99.6 LER: 272.3 Duv: -0.00087 v': 0.4772

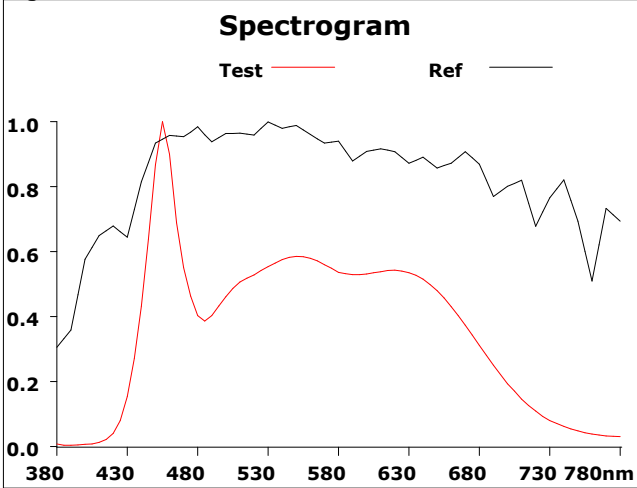

500			
Hue Bin	Rf	Chroma	Hue
1	92.0	-2.0%	0.9%
2	95.0	-0.9%	1.7%
3	93.1	-0.7%	1.8%
4	92.0	-1.7%	0.8%
5	90.7	-3.4%	0.4%
6	96.1	-0.9%	-0.0%
7	93.6	-3.2%	1.2%
8	90.0	-3.1%	4.2%
9	87.7	-2.9%	9.6%
10	82.9	-0.5%	9.6%
11	82.8	3.5%	9.1%
12	94.1	2.7%	2.2%
13	93.4	4.3%	-0.4%
14	94.1	1.6%	-1.6%
15	84.2	7.9%	-8.8%
16	96.0	-1.2%	-0.3%

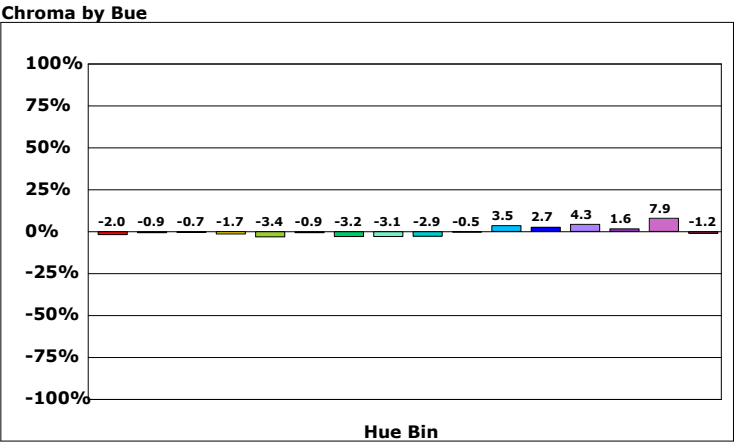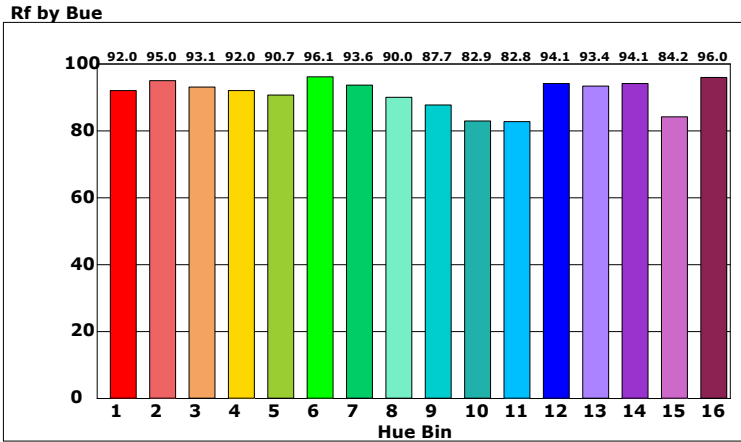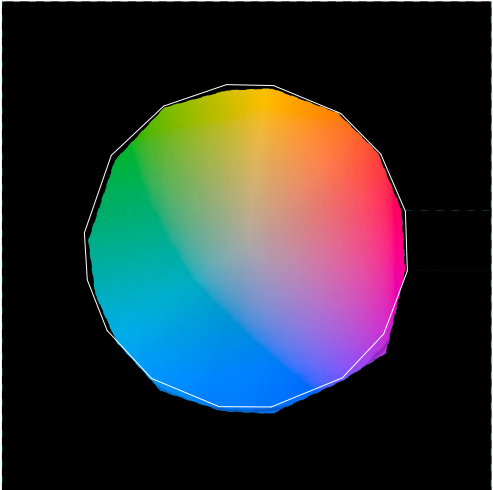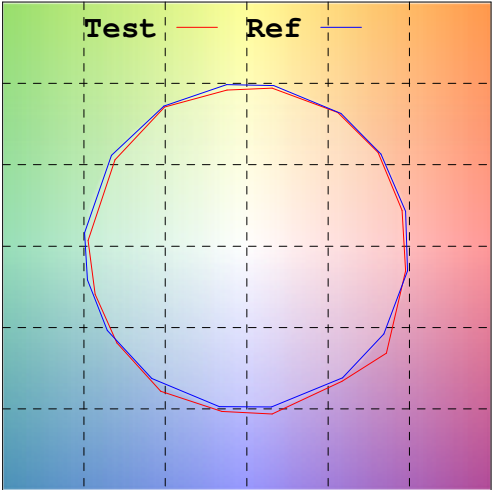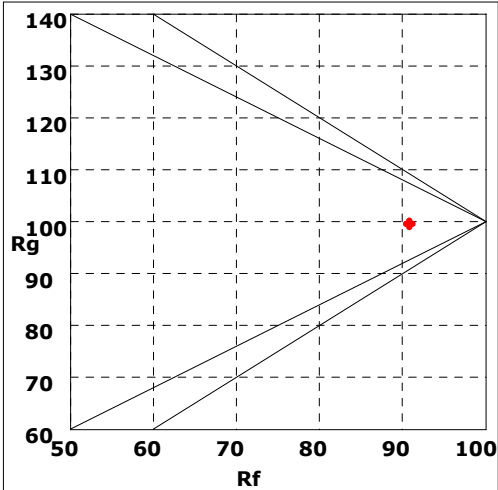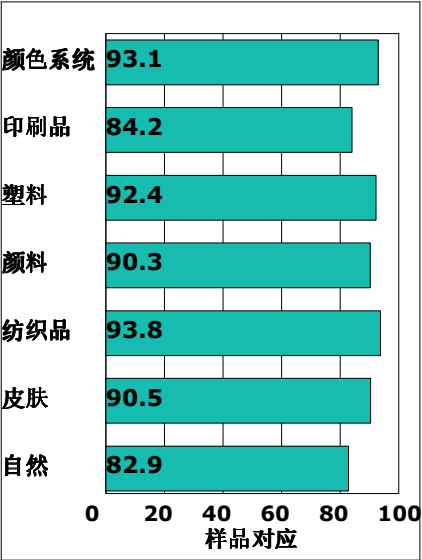

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/11/23
备注:

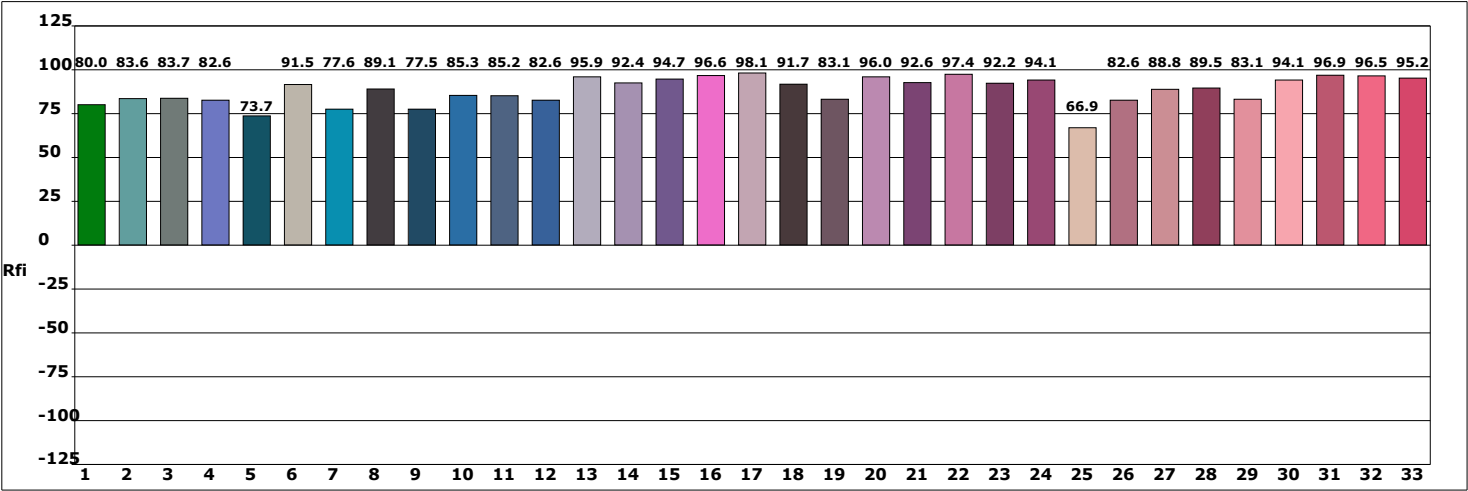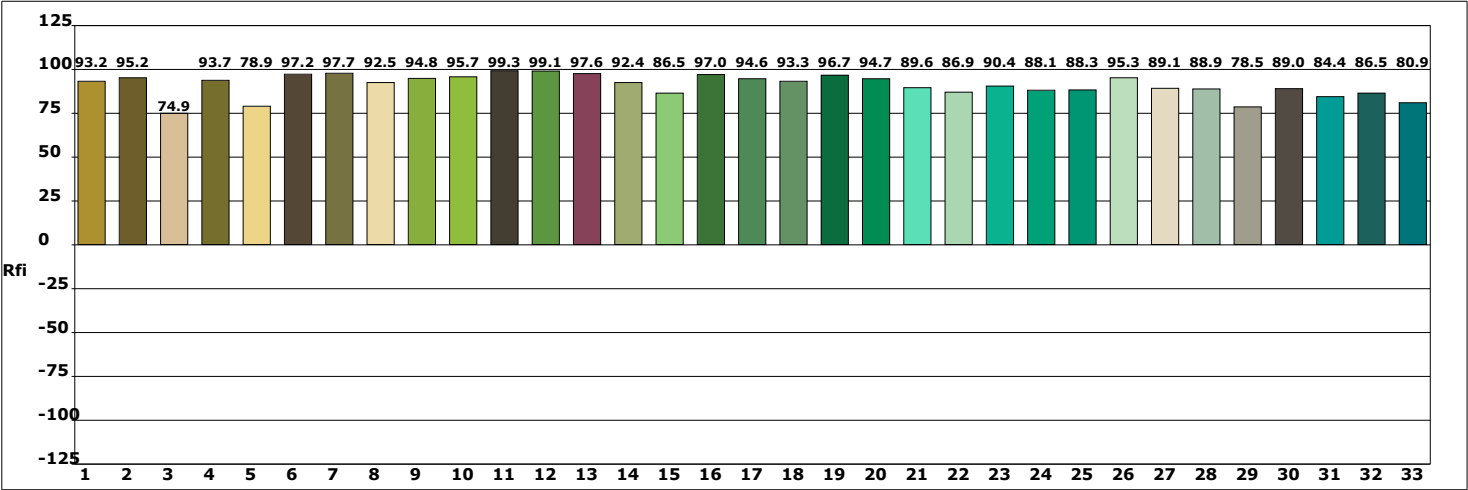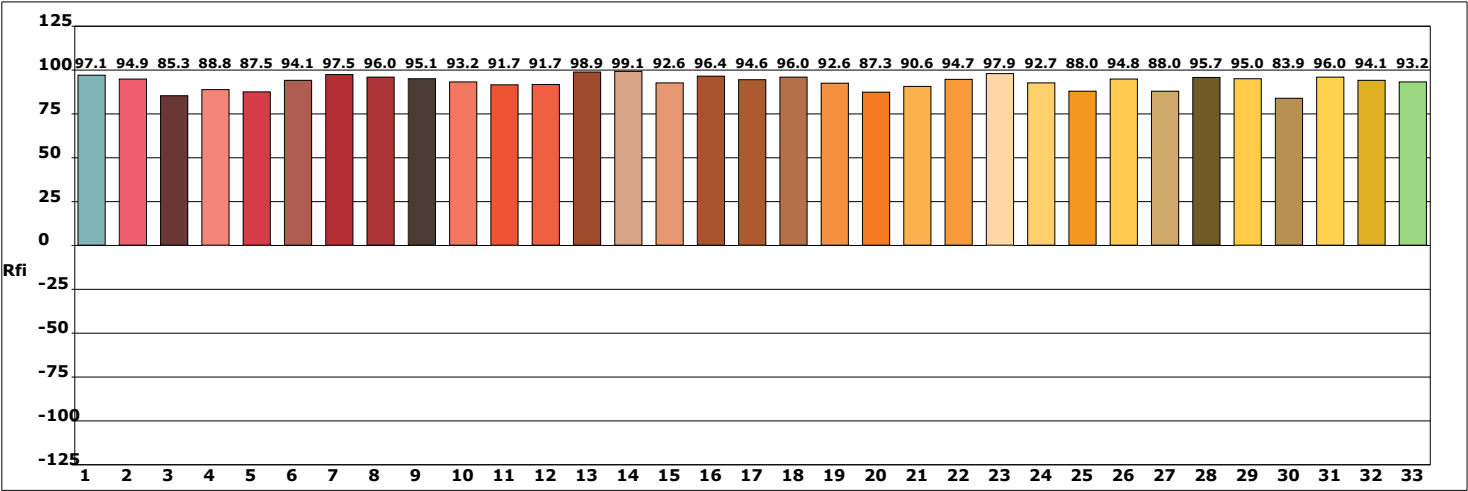

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/11/23