



光谱图

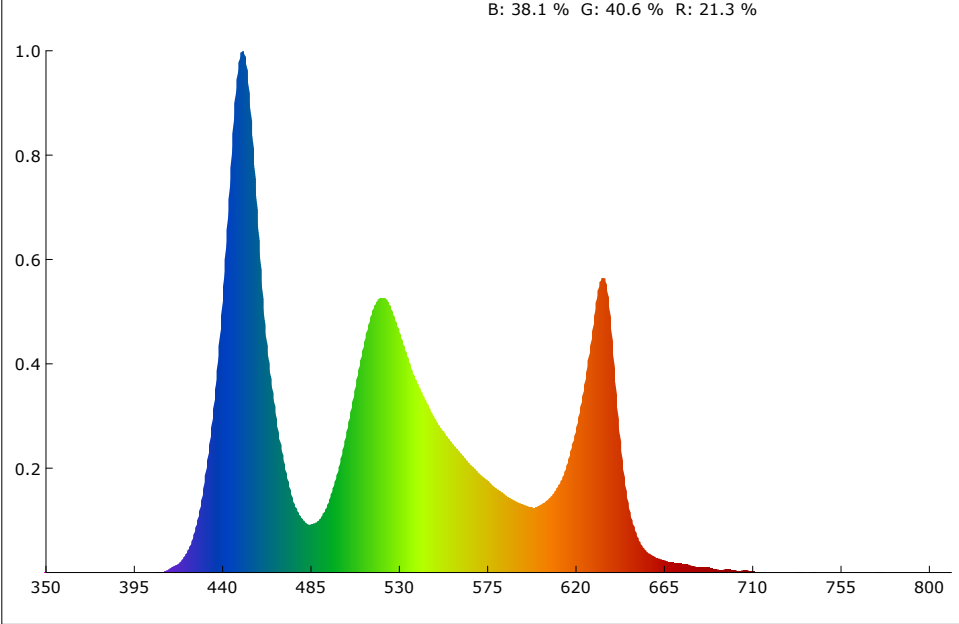

SDCM

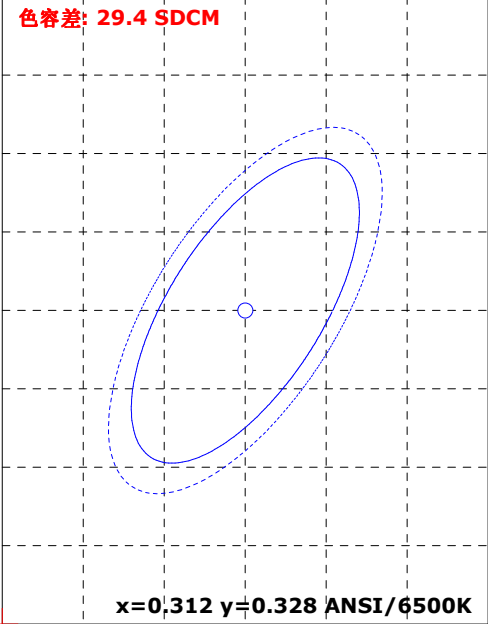

颜色参数:

坐标x: 0.2709 坐标y: 0.2913 坐标u: 0.1820 坐标v: 0.2936 坐标u': 0.1820 坐标v': 0.4404
红色比: 21.3 % 绿色比: 40.6 % 蓝色比: 38.1 % 光通量红色比: 14.4 % 光通量绿色比: 81.0 % 光通量蓝色比: 4.5 %

显色指数: 82.0 AvgR: 75.1
R1: 89.9 R2: 90.7 R3: 70.5 R4: 75.8 R5: 93.9 R6: 87.7 R7: 81.0 R8: 66.8
R9: 13.8 R10: 75.4 R11: 66.2 R12: 57.4 R13: 93.2 R14: 82.9 R15: 81.9


色温: 10946 K 光通量: 214.732 lm 峰值波长: 450.6 nm 色容差: 29.4
明暗视觉比: 2.8 中心波长: 451.0 nm 主波长: 482.5 nm 质心波长: 526.8 nm
半宽度: 21.4 nm 色偏差: 0.00766 色纯度: 24.7 % 色质指数: 86.8
LER(TM-30): 277.8 辐射功率: 773.0 mw 色域指数(Rg): 107.4 逼真度(Rf): 81.3
红光辐射功率: 164.3 mw 近红辐射功率: 0.7 mw 远红辐射功率: 0.0 mw

电参数:




光效: 6.5 Lm/W 能效: 7.1 能效等级: G
电压: 220.5 V 电流: 0.263 A 功率: 33.080 W 功率因素: 0.570

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:


Rf: 81.3 CCT: 10946K u': 0.1820
Rg: 107.4 LER: 277.8 Duv: 0.00766 v': 0.4404

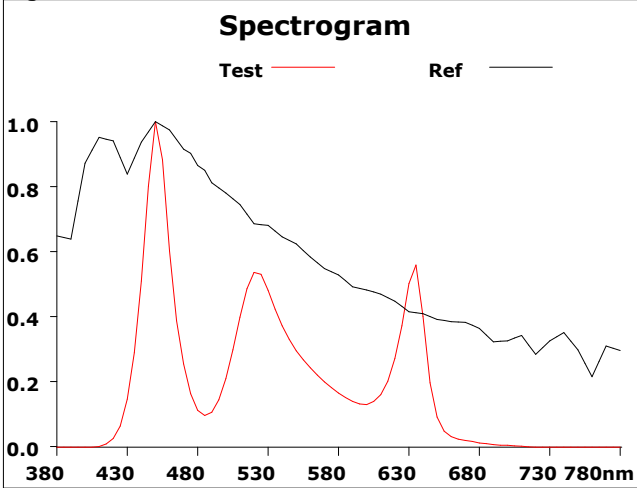

500			
Hue Bin	Rf	Chroma	Hue
1	74.3	11.6%	-2.5%
2	82.4	5.0%	-6.3%
3	89.3	0.6%	-4.5%
4	88.8	0.8%	1.9%
5	82.8	-1.1%	3.7%
6	84.4	7.1%	4.5%
7	75.6	-3.6%	-0.5%
8	89.4	0.6%	-2.5%
9	87.1	-5.3%	5.2%
10	80.5	-5.4%	12.1%
11	62.3	-0.8%	17.5%
12	79.9	-0.2%	13.9%
13	76.6	6.8%	15.8%
14	74.2	8.3%	13.3%
15	72.7	21.9%	8.1%
16	77.9	9.2%	-0.7%

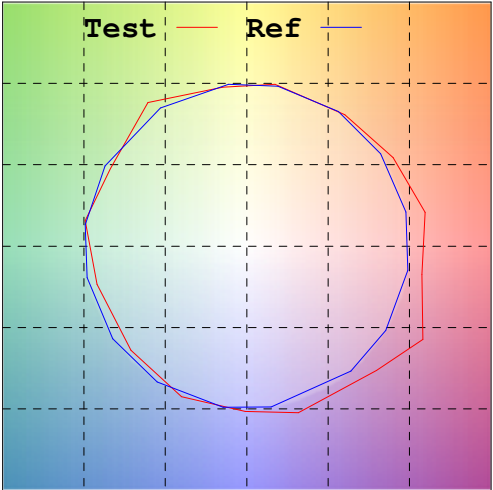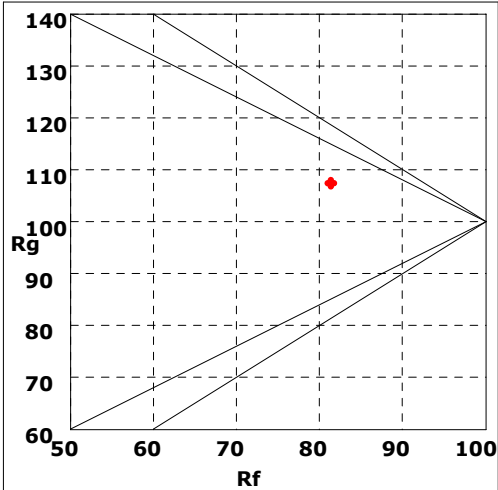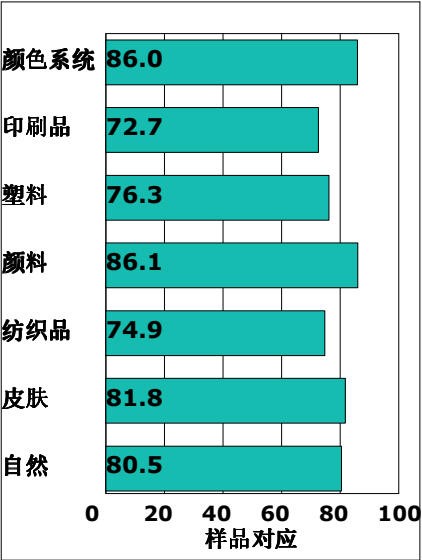

Rf by Bue

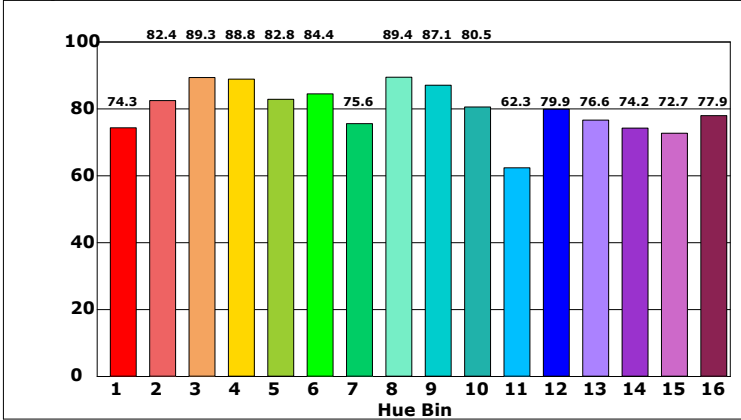

Chroma by Bue

