



Event 100C Profile is a RGBL LED Profile. Zoom lens available in 15° - 30° or 25° - 50°. The fixture comes with average high CRI over 80.


Key features:

- 100W Constant output RGBL
- 250W RGBL LED (55W R + 65W G + 65W B + 65W L)
- Average CRI over 80
- HD optical system, clean shutter cuts beam
- 15° - 30° or 25° - 50° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 3.5 kg, easy to install and setup
- IP rated powercon in, DMX in & out

Application:


- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition

Accessories:





Event 100C Profile

100W RGBL LED profile zoom

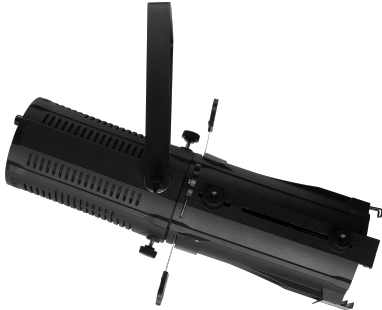

Photometric

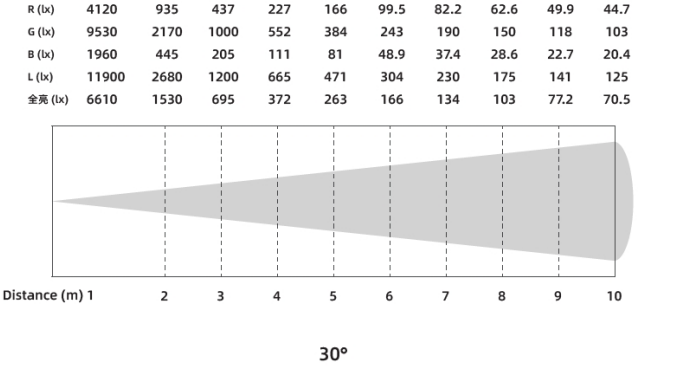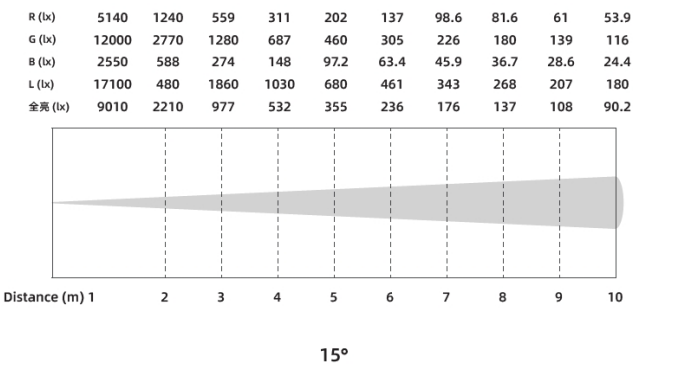

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	250W LED (55W R + 65W G + 65W B + 65W L)
Color :	RGBL
Zoom range:	15° - 30° or 25° - 50° manual zoom
Color Rendition:	CRI over 80
Power connection:	IP rated powercon in
Signal connection:	3-pin XLR in & out
Control channels:	3/4/5/6/11
Control mode:	Rotary, DMX, RDM

Size:	459 x 221 x 342mm
Package(carton):	560 x 280 x 330mm
N.W.:	3.5 kg
G.W.:	5 kg
Accessories:	Power cable, gel frame, Safety rope, Gobo holder
GOBO Size:	OD 38mm
Housing:	Color black, engineering plastic
Environment:	IP20