


光谱图

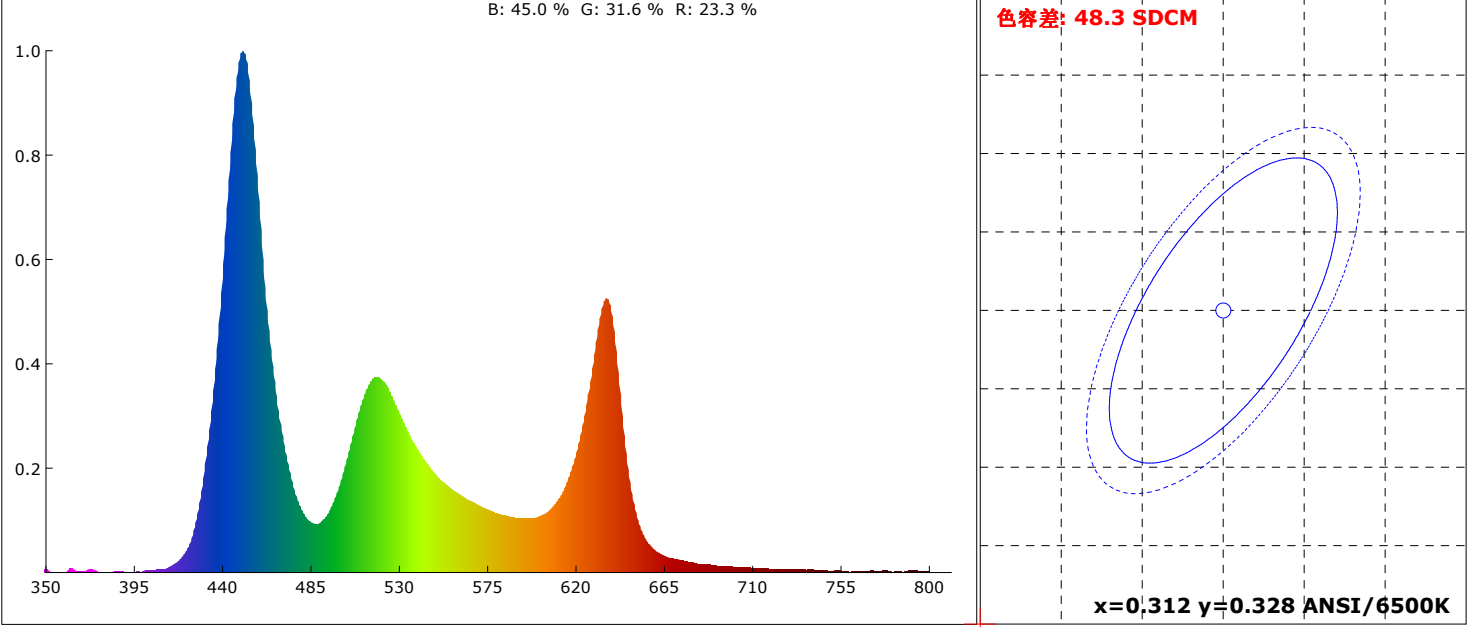

颜色参数:

坐标x: 0.2601 坐标y: 0.2357 坐标u: 0.1960 坐标v: 0.2664 坐标u': 0.1960 坐标v': 0.3996

红色比: 23.3 % 绿色比: 31.6 % 蓝色比: 45.0 % 光通量红色比: 17.7 % 光通量绿色比: 75.7 % 光通量蓝色比: 6.6 %

显色指数: 66.2 AvgR: 53.6

R1: 57.9 R2: 88.0 R3: 63.5 R4: 54.0 R5: 70.8 R6: 88.6 R7: 75.4 R8: 31.8

R9: -99.0 R10: 82.8 R11: 41.1 R12: 65.8 R13: 65.6 R14: 77.0 R15: 40.7

色温: 37213 K 光通量: 791.562 lm 峰值波长: 450.6 nm 色容差: 48.3

明暗视觉比: 3.2 中心波长: 451.2 nm 主波长: 469.6 nm 质心波长: 524.6 nm

半宽度: 23.7 nm 色偏差: -0.01474 色纯度: 35.2 % 色质指数: 89.1

LER(TM-30): 226.1 辐射功率: 3500.3 mw 色域指数(Rg): 117.5 逼真度(Rf): 71.1


红光辐射功率: 808.0 mw 近红辐射功率: 26.7 mw 远红辐射功率: 4.1 mw

电参数:





光效: 9.1 Lm/W 能效: 9.9 能效等级: G

电压: 222.0 V 电流: 0.622 A 功率: 87.050 W 功率因素: 0.629


Rf: 71.1 CCT: 37213K u': 0.1960
Rg: 117.5 LER: 226.1 Duv: -0.01474 v': 0.3996

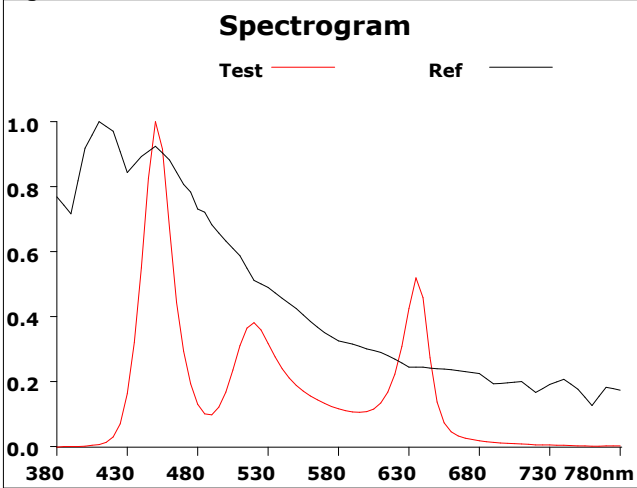


500			
Hue Bin	Rf	Chroma	Hue
1	50.4	25.5%	2.5%
2	69.2	12.5%	-6.0%
3	73.3	9.4%	-11.2%
4	83.9	4.4%	-1.8%
5	78.0	-1.6%	3.9%
6	80.4	5.9%	8.4%
7	70.0	1.5%	6.1%
8	79.3	6.8%	9.7%
9	82.2	3.5%	6.7%
10	78.5	0.8%	14.7%
11	60.4	1.4%	18.7%
12	69.5	-0.7%	24.6%
13	58.6	0.5%	25.0%
14	49.5	8.6%	29.8%
15	48.4	33.2%	29.9%
16	59.8	16.0%	9.7%

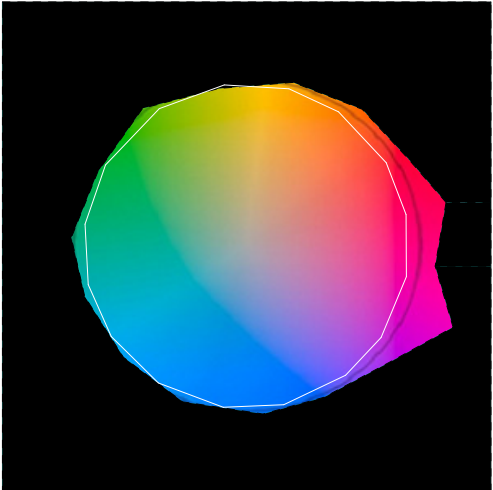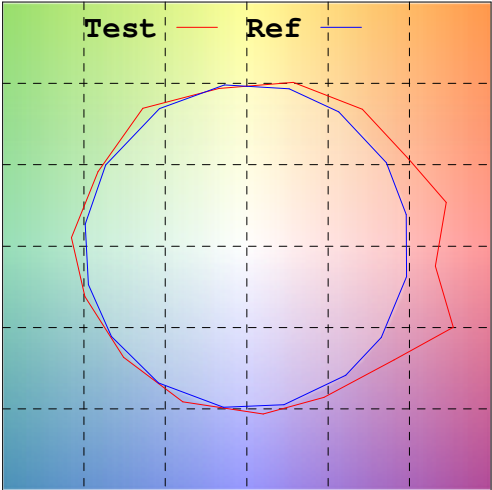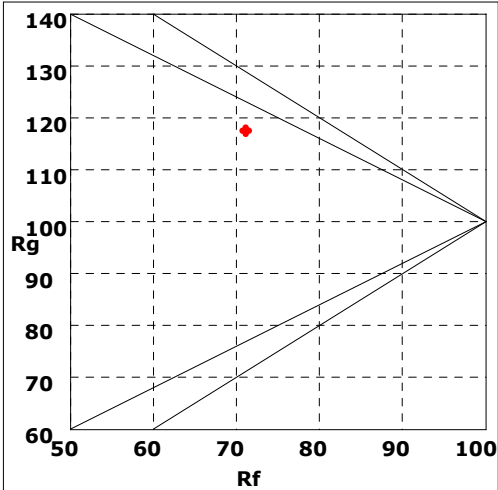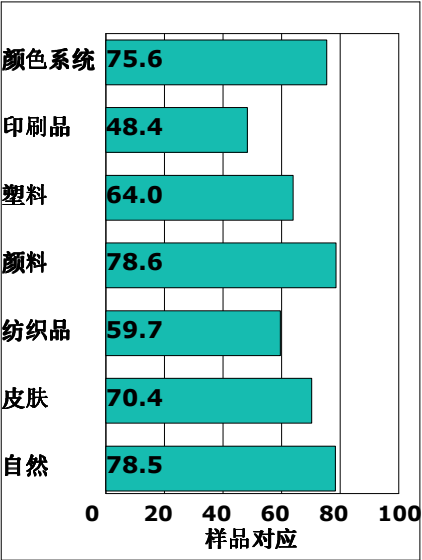

Rf by Bue

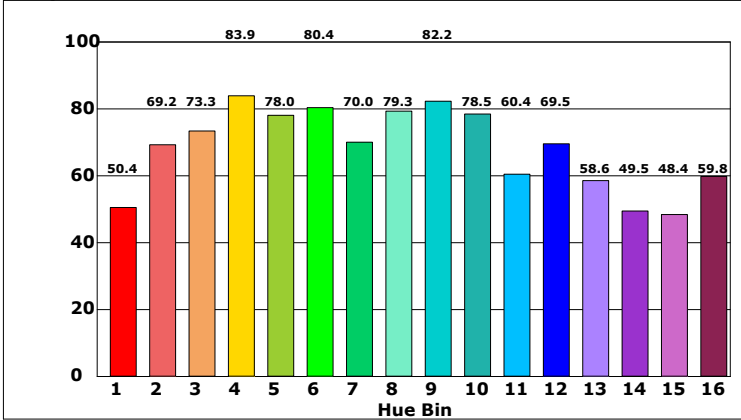

Chroma by Bue

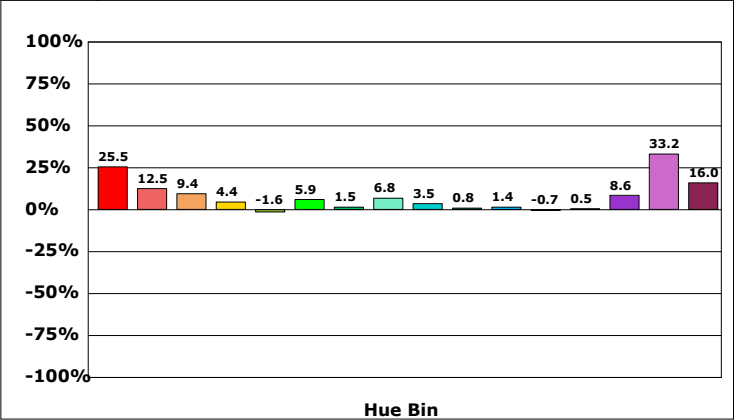

产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

