



光谱图

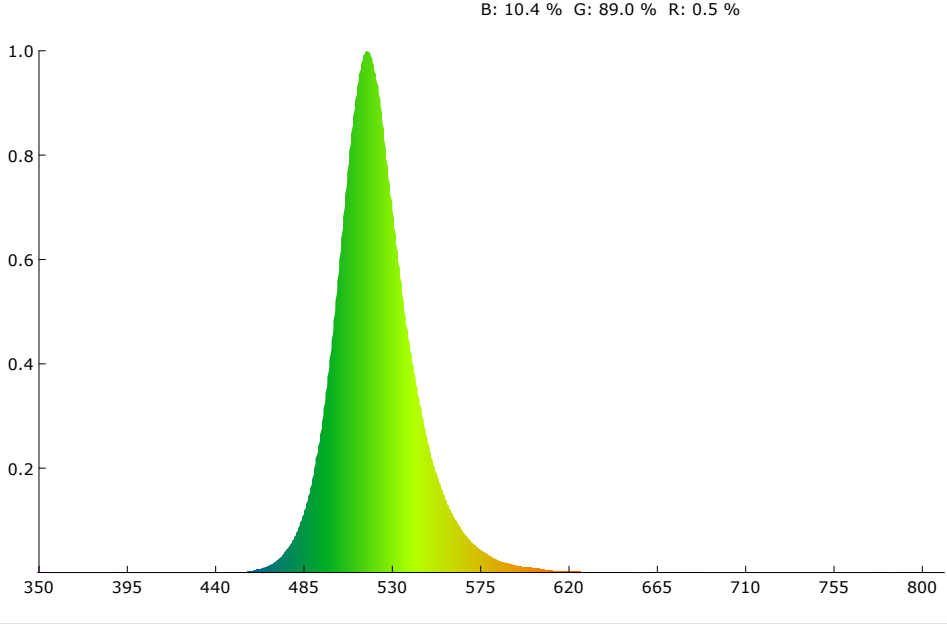

SDCM

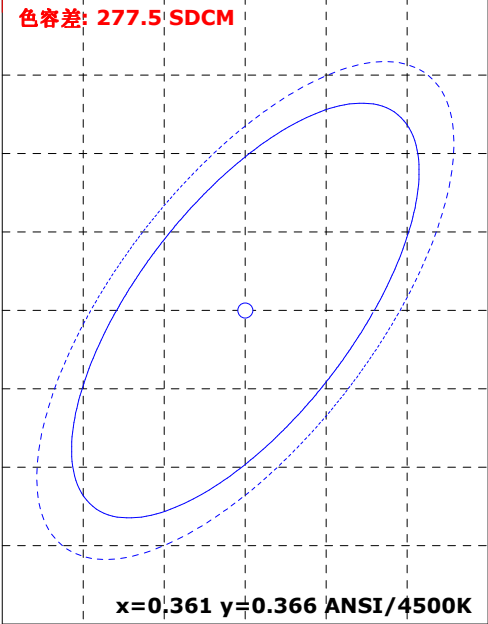

颜色参数:

坐标x: 0.1560 坐标y: 0.7071 坐标u: 0.0558 坐标v: 0.3797 坐标u': 0.0558 坐标v': 0.5696
红色比: 0.5 % 绿色比: 89.0 % 蓝色比: 10.4 % 光通量红色比: 0.3 % 光通量绿色比: 98.8 % 光通量蓝色比: 1.0 %


显色指数: -21.1 AvgR: -33.8
R1: -33.0 R2: -4.9 R3: -17.1 R4: -63.0 R5: -8.5 R6: -11.5 R7: -2.4 R8: -28.7
R9: -99.0 R10: -97.4 R11: -89.6 R12: -24.0 R13: -38.7 R14: 41.5 R15: -31.0

色温: 8260 K 光通量: 891.353 lm 峰值波长: 517.7 nm 色容差: 277.5
明暗视觉比: 3.1 中心波长: 519.0 nm 主波长: 522.9 nm 质心波长: 522.5 nm
半宽度: 35.0 nm 色偏差: 0.15935 色纯度: 75.0 % 色质指数: 0.3
LER(TM-30): 457.6 辐射功率: 1948.0 mw 色域指数(Rg): 9.3 逼真度(Rf): 1.1
红光辐射功率: 10.0 mw 近红辐射功率: 0.9 mw 远红辐射功率: 0.8 mw




电参数:

光效: 11.4 Lm/W 能效: 12.4 能效等级: G
电压: 222.0 V 电流: 0.562 A 功率: 78.030 W 功率因素: 0.638


Rf: 1.1 CCT: 8260K u': 0.0558
Rg: 9.3 LER: 457.6 Duv: 0.15935 v': 0.5696

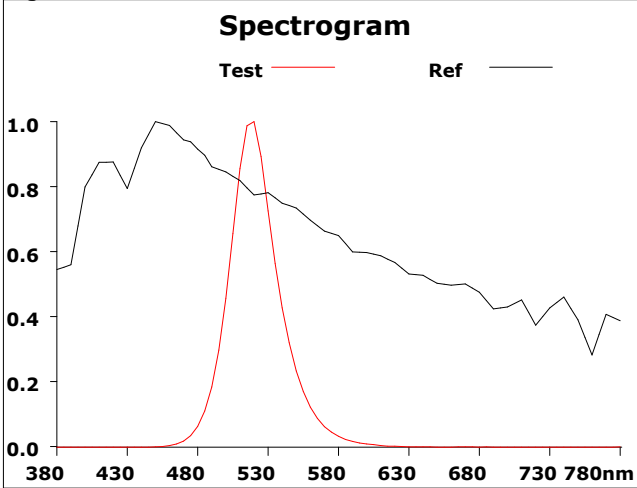


500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-84.1%	-0.6%
2	0.0	-70.0%	4.6%
3	0.3	-72.9%	-2.2%
4	3.9	-56.1%	-8.6%
5	1.4	-71.0%	-3.1%
6	0.8	-77.5%	-2.1%
7	0.5	-72.7%	1.9%
8	0.1	-77.5%	12.0%
9	15.4	-62.3%	31.0%
10	12.6	-48.0%	21.3%
11	4.2	-44.4%	5.1%
12	28.4	-42.1%	-20.5%
13	23.4	-51.8%	-26.5%
14	0.2	-64.3%	-41.7%
15	3.0	-78.2%	-51.1%
16	0.0	-80.8%	-20.5%

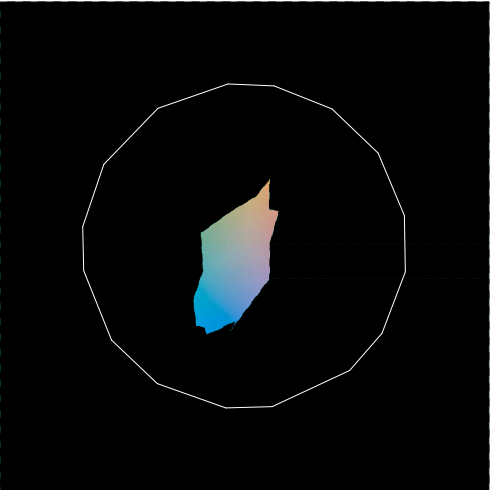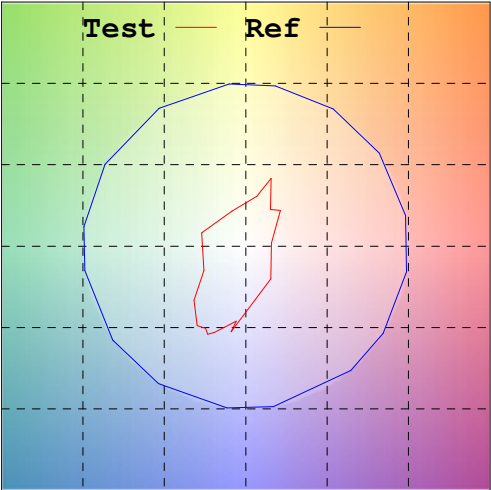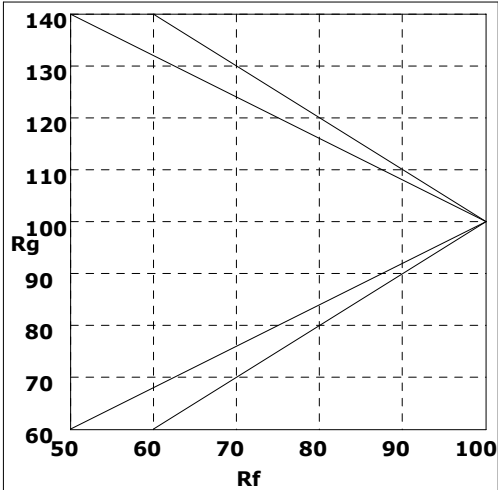

Rf by Bue

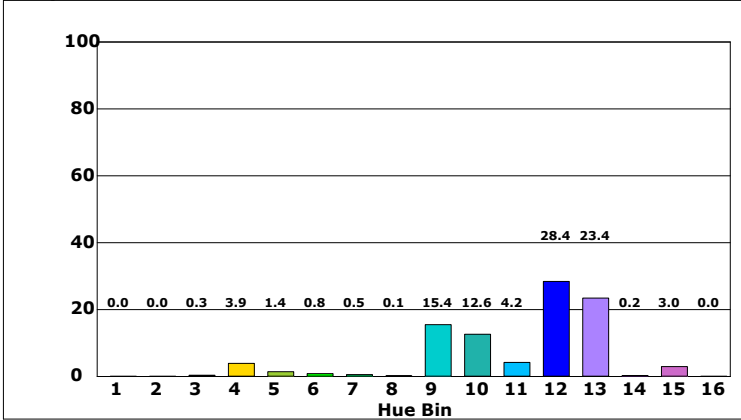

Chroma by Bue

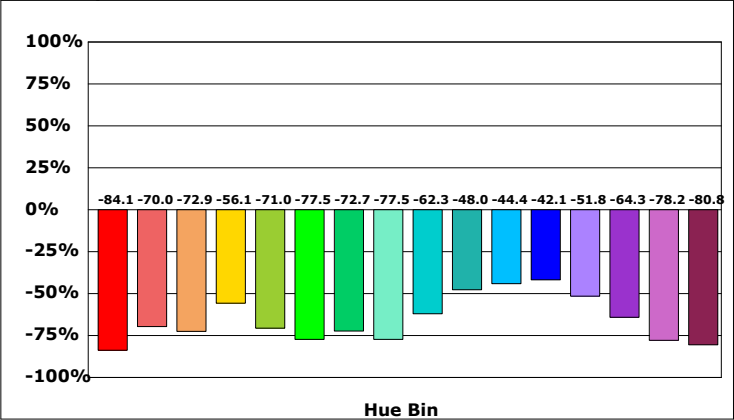

产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

