


光谱图

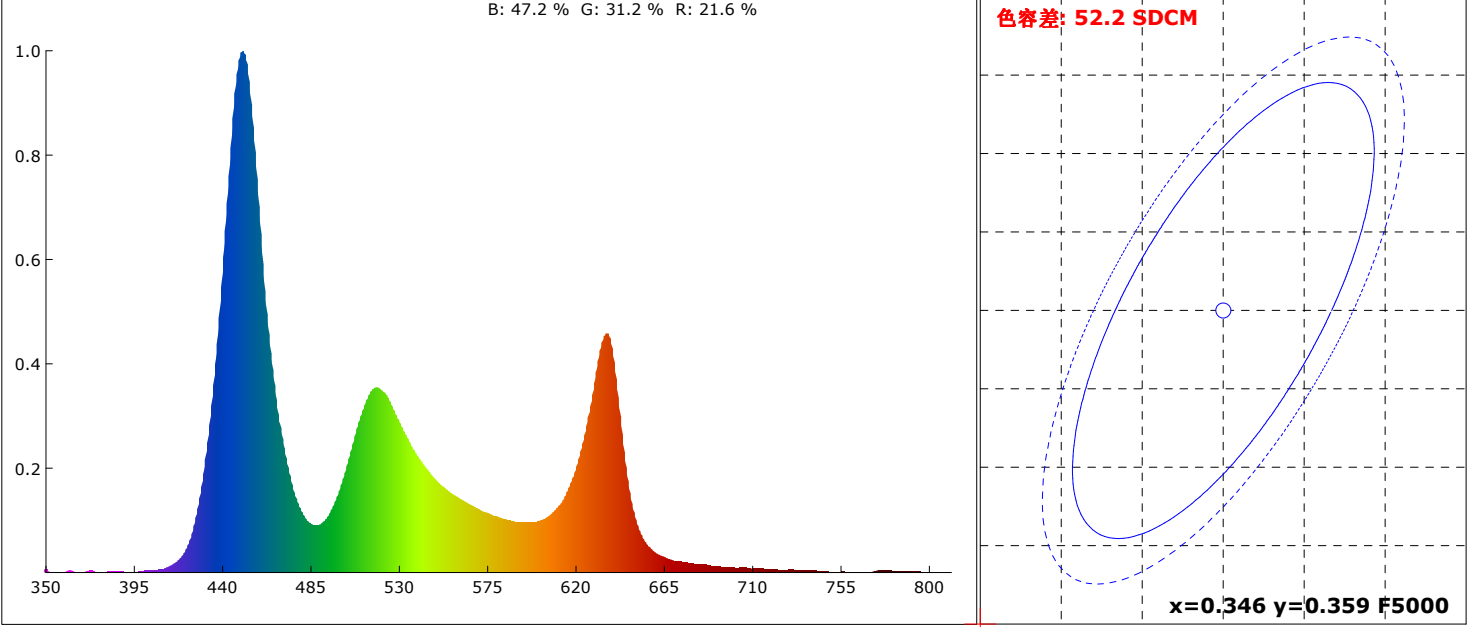

颜色参数:

坐标x: 0.2524 坐标y: 0.2276 坐标u: 0.1932 坐标v: 0.2613 坐标u': 0.1932 坐标v': 0.3920
红色比: 21.6 % 绿色比: 31.2 % 蓝色比: 47.2 % 光通量红色比: 16.7 % 光通量绿色比: 76.3 % 光通量蓝色比: 7.0 %


显色指数: 69.8 AvgR: 56.7
R1: 62.8 R2: 89.4 R3: 65.2 R4: 59.6 R5: 75.2 R6: 89.1 R7: 78.4 R8: 39.4
R9: -99.0 R10: 84.9 R11: 47.2 R12: 63.9 R13: 69.5 R14: 78.3 R15: 46.3

色温: 99999 K 光通量: 892.302 lm 峰值波长: 450.6 nm 色容差: 52.2
明暗视觉比: 3.3 中心波长: 451.0 nm 主波长: 470.3 nm 质心波长: 520.7 nm
半宽度: 23.7 nm 色偏差: 0.04931 色纯度: 38.5 % 色质指数: 89.3
LER(TM-30): 222.2 辐射功率: 4016.4 mw 色域指数(Rg): 115.9 逼真度(Rf): 71.8
红光辐射功率: 858.8 mw 近红辐射功率: 26.3 mw 远红辐射功率: 3.9 mw







电参数:

光效: 10.3 Lm/W 能效: 11.2 能效等级: G
电压: 222.0 V 电流: 0.618 A 功率: 86.900 W 功率因素: 0.633

Rf: 71.8 CCT: 99999K u': 0.1932
Rg: 115.9 LER: 222.2 Duv: 0.04931 v': 0.3920

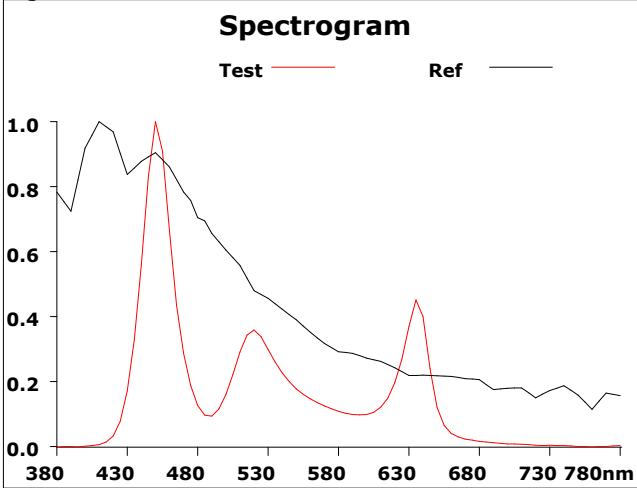

500			
Hue Bin	Rf	Chroma	Hue
1	53.5	23.9%	2.2%
2	65.7	11.1%	-5.2%
3	77.9	8.6%	-9.7%
4	83.4	4.5%	-0.2%
5	77.7	-1.2%	4.3%
6	81.2	5.7%	7.7%
7	71.1	0.7%	5.5%
8	80.7	5.2%	9.2%
9	81.9	1.7%	9.0%
10	71.6	-1.3%	17.0%
11	59.0	0.1%	18.6%
12	68.7	0.0%	25.4%
13	59.6	1.2%	24.4%
14	51.6	9.1%	28.2%
15	50.4	33.2%	27.9%
16	62.4	15.0%	8.8%

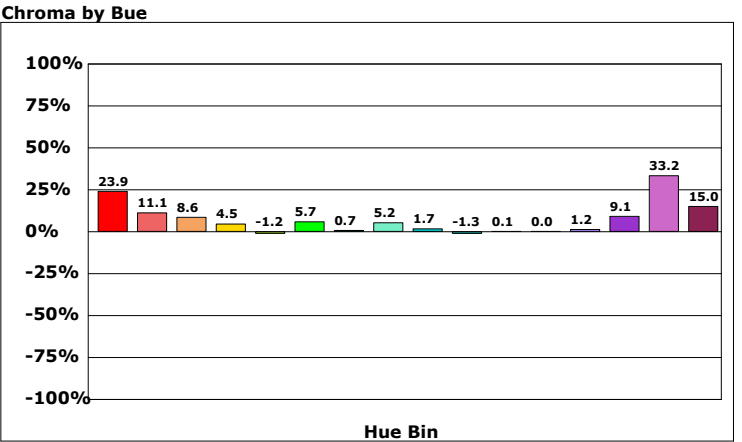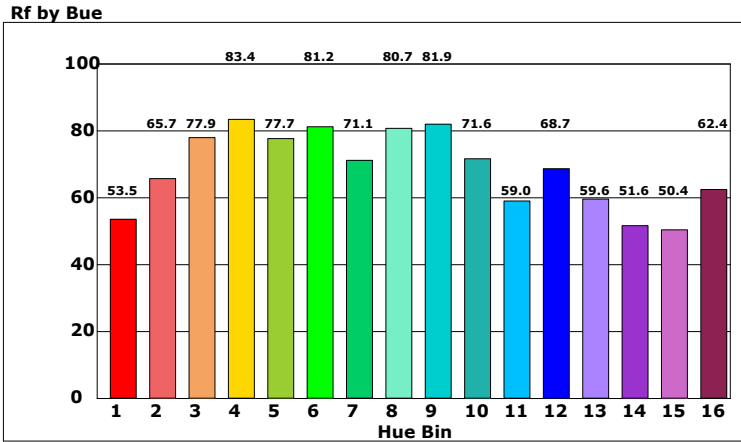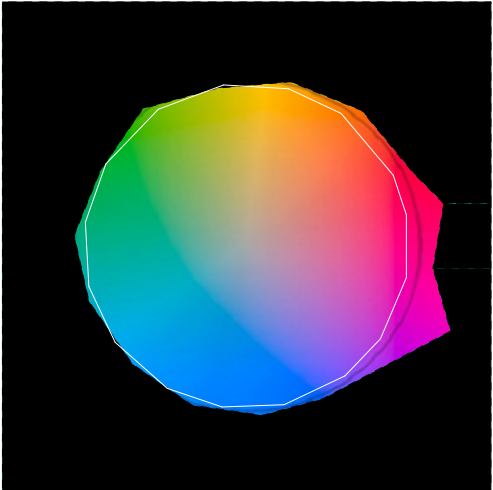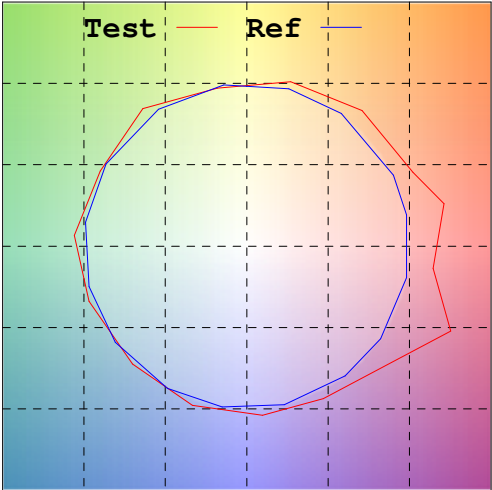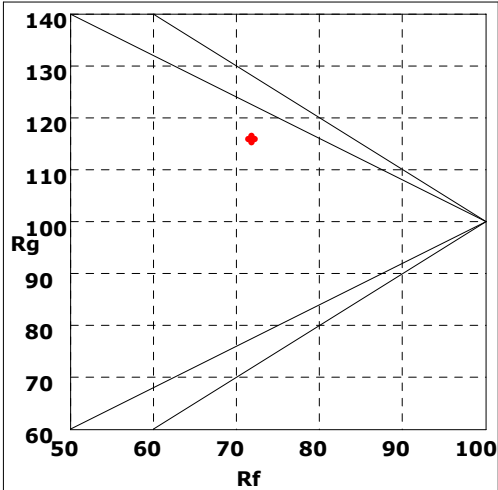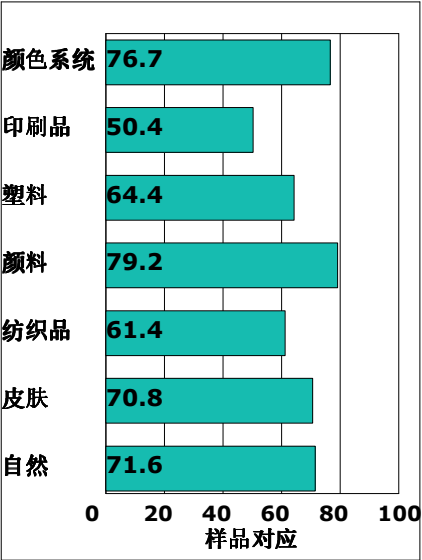

产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

