



光谱图

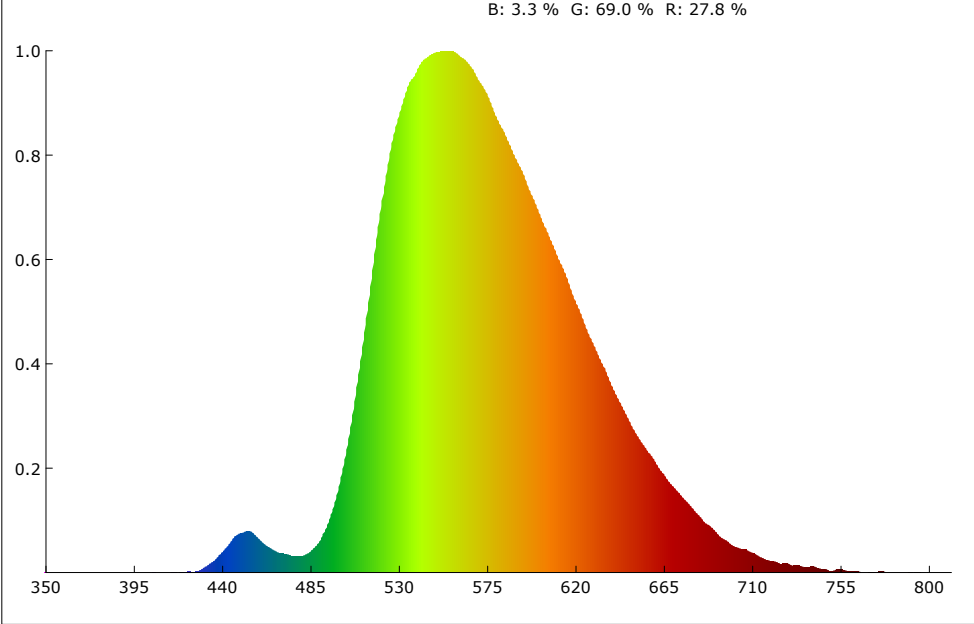

SDCM

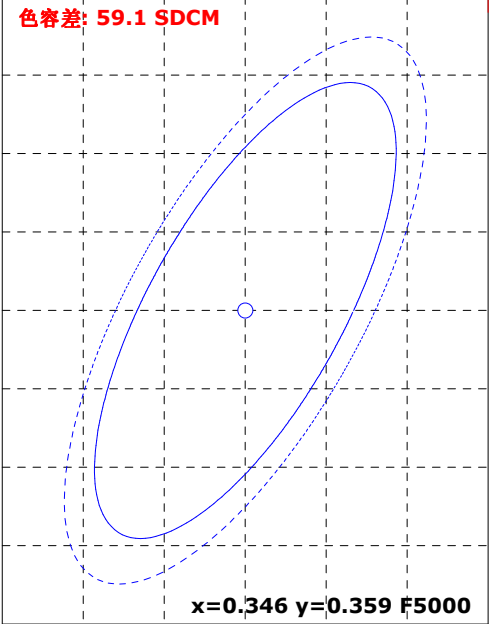

颜色参数:

坐标x: 0.4255 坐标y: 0.5307 坐标u: 0.1998 坐标v: 0.3738 坐标u': 0.1998 坐标v': 0.5607
红色比: 27.8 % 绿色比: 69.0 % 蓝色比: 3.3 % 光通量红色比: 11.8 % 光通量绿色比: 88.0 % 光通量蓝色比: 0.3 %


显色指数: 52.3 AvgR: 34.9
R1: 43.3 R2: 59.1 R3: 75.0 R4: 41.6 R5: 42.0 R6: 47.8 R7: 77.6 R8: 32.7
R9: -99.0 R10: 10.3 R11: 25.4 R12: 4.3 R13: 44.9 R14: 87.5 R15: 30.9

色温: 3957 K 光通量: 1073.761 lm 峰值波长: 556.5 nm 色容差: 59.1
明暗视觉比: 1.2 中心波长: 567.9 nm 主波长: 569.3 nm 质心波长: 574.8 nm
半宽度: 107.8 nm 色偏差: 0.04681 色纯度: 87.2 % 色质指数: 59.3
LER(TM-30): 461.7 辐射功率: 2325.7 mw 色域指数(Rg): 60.7 逼真度(Rf): 54.7
红光辐射功率: 638.9 mw 近红辐射功率: 24.2 mw 远红辐射功率: 0.2 mw





电参数:

光效: 14.9 lm/W 能效: 16.2 能效等级: G
电压: 222.0 V 电流: 0.521 A 功率: 72.060 W 功率因素: 0.622


Rf: 54.7 CCT: 3957K u': 0.1998
Rg: 60.7 LER: 461.7 Duv: 0.04681 v': 0.5607

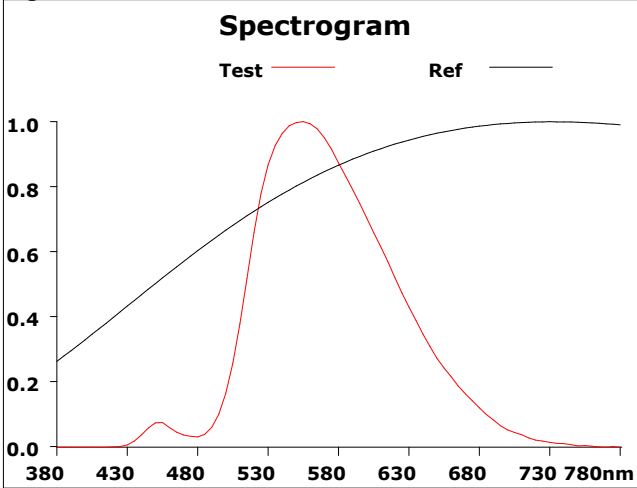

500			
Hue Bin	Rf	Chroma	Hue
1	50.2	-25.2%	-2.7%
2	55.6	-21.3%	-4.0%
3	43.5	-27.0%	-3.2%
4	50.0	-28.9%	-1.0%
5	49.5	-33.8%	4.8%
6	46.9	-32.5%	8.5%
7	45.5	-30.1%	14.2%
8	50.6	-24.7%	12.0%
9	58.0	-22.0%	17.7%
10	44.1	-21.1%	23.9%
11	64.6	-11.3%	17.2%
12	70.5	-9.5%	8.3%
13	74.3	-11.7%	-4.2%
14	75.0	-8.7%	-6.6%
15	62.0	-16.8%	-11.8%
16	57.3	-18.7%	-9.1%

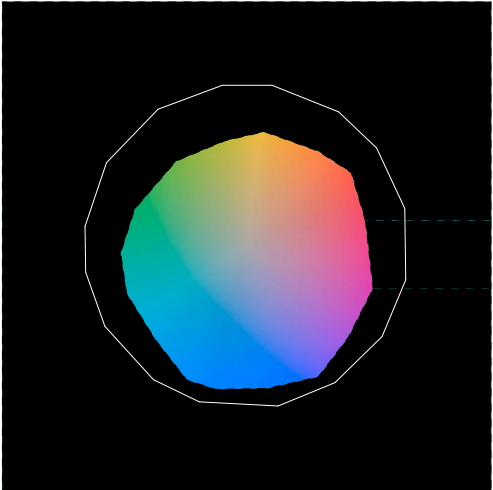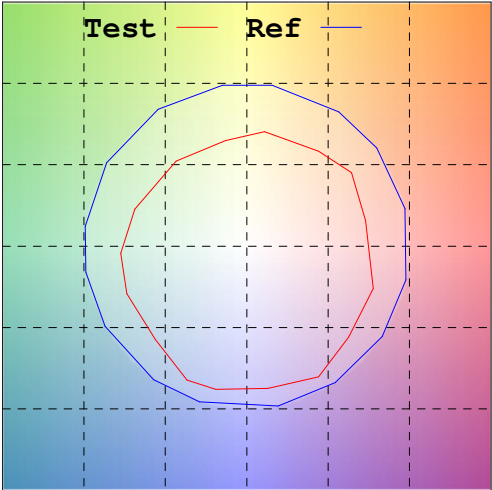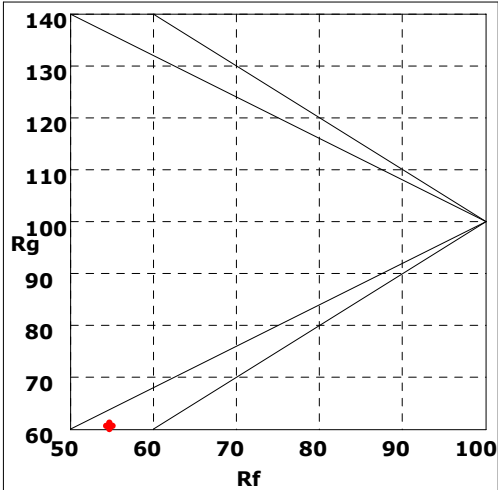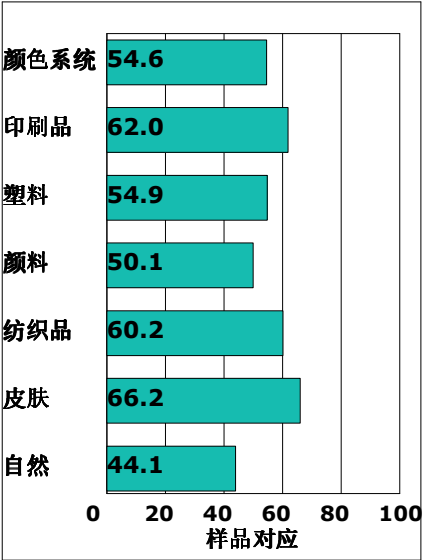

Rf by Bue

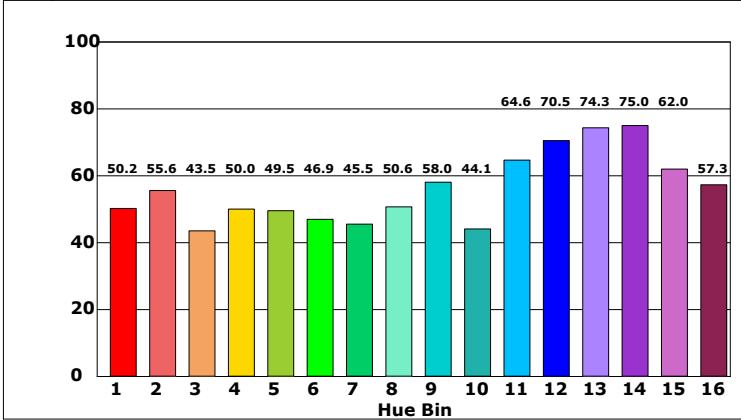

Chroma by Bue



产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

