



光谱图

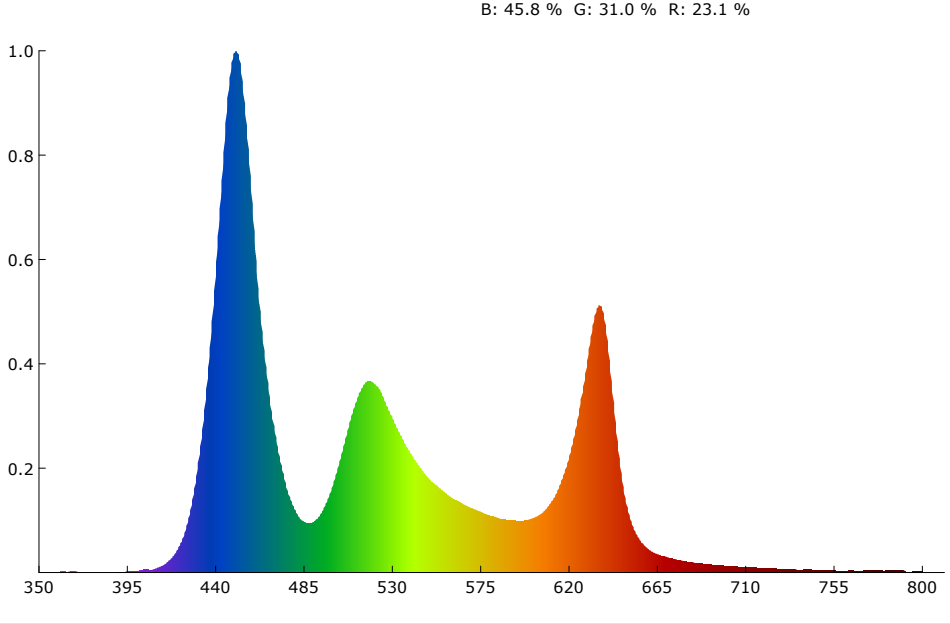

SDCM

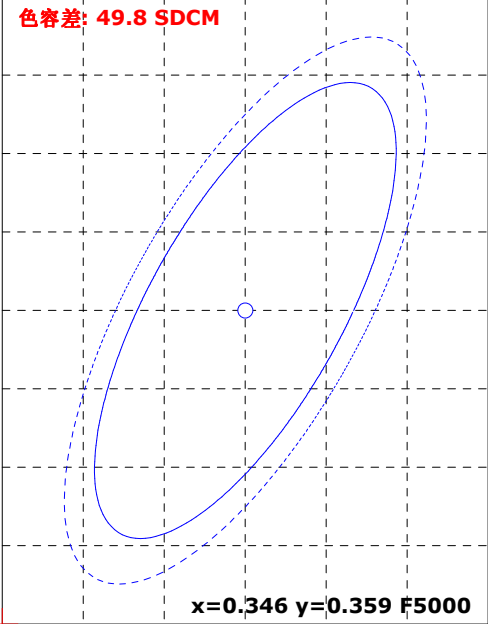

颜色参数:

坐标x: 0.2576 坐标y: 0.2313 坐标u: 0.1959 坐标v: 0.2638 坐标u': 0.1959 坐标v': 0.3957
红色比: 23.1 % 绿色比: 31.0 % 蓝色比: 45.8 % 光通量红色比: 17.7 % 光通量绿色比: 75.5 % 光通量蓝色比: 6.8 %


显色指数: 65.6 AvgR: 52.9
R1: 57.0 R2: 87.5 R3: 63.1 R4: 52.9 R5: 69.9 R6: 87.8 R7: 75.6 R8: 31.3
R9: -99.0 R10: 81.6 R11: 39.7 R12: 65.7 R13: 64.8 R14: 76.7 R15: 39.5

色温: 58963 K 光通量: 920.531 lm 峰值波长: 450.6 nm 色容差: 49.8
明暗视觉比: 3.3 中心波长: 451.2 nm 主波长: 469.2 nm 质心波长: 524.1 nm
半宽度: 23.7 nm 色偏差: -0.01532 色纯度: 36.6 % 色质指数: 88.8
LER(TM-30): 222.2 辐射功率: 4142.6 mw 色域指数(Rg): 117.5 逼真度(Rf): 70.4
红光辐射功率: 947.6 mw 近红辐射功率: 36.1 mw 远红辐射功率: 5.6 mw





电参数:

光效: 10.6 Lm/W 能效: 11.5 能效等级: G
电压: 222.1 V 电流: 0.617 A 功率: 87.070 W 功率因素: 0.634


Rf: 70.4 CCT: 58963K u': 0.1959
Rg: 117.5 LER: 222.2 Duv: -0.01532 v': 0.3957

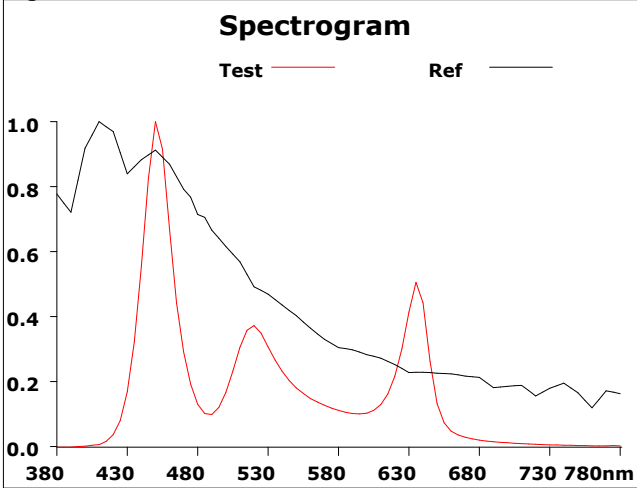


500			
Hue Bin	Rf	Chroma	Hue
1	49.2	26.2%	2.7%
2	61.2	12.6%	-5.8%
3	74.4	9.9%	-11.6%
4	83.4	4.5%	-2.0%
5	77.7	-1.6%	3.8%
6	80.0	5.9%	8.6%
7	69.3	1.6%	6.4%
8	78.6	7.1%	10.1%
9	81.9	3.5%	8.4%
10	77.4	0.6%	13.7%
11	60.0	1.4%	18.9%
12	68.9	-0.8%	25.2%
13	57.8	0.4%	25.5%
14	48.3	8.6%	30.5%
15	47.1	33.9%	31.0%
16	58.7	16.3%	10.1%

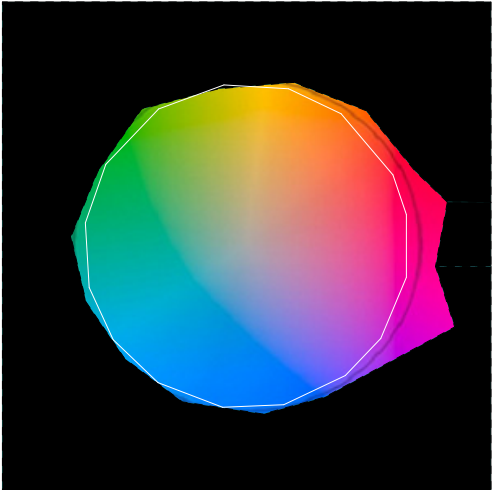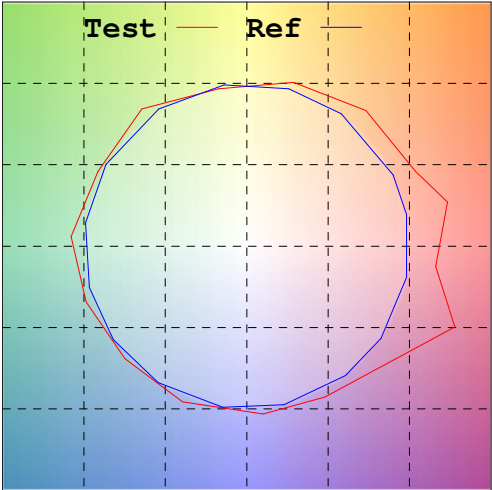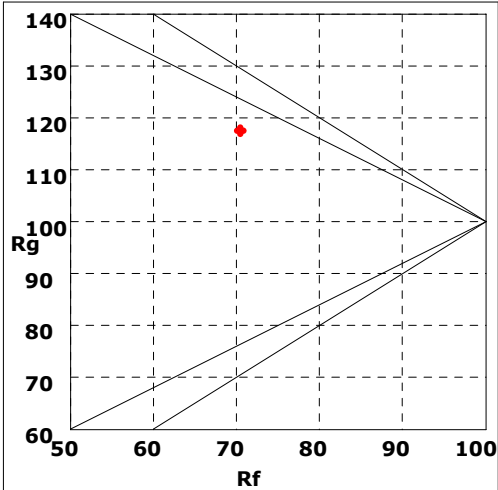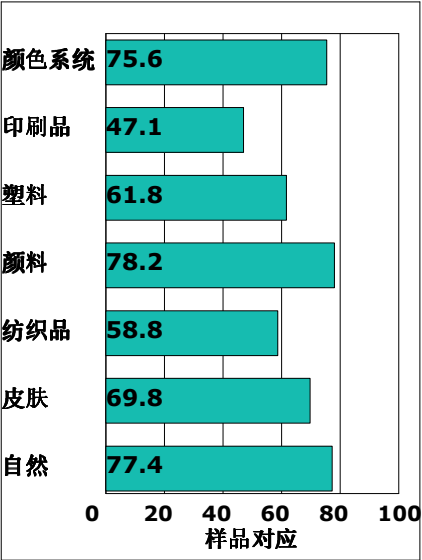

Rf by Bue

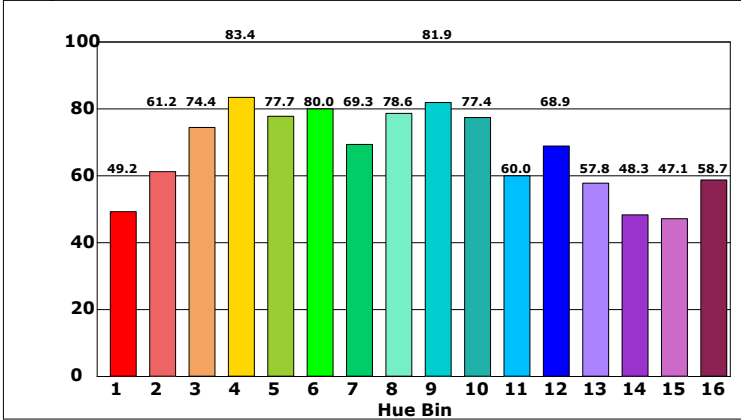

Chroma by Bue

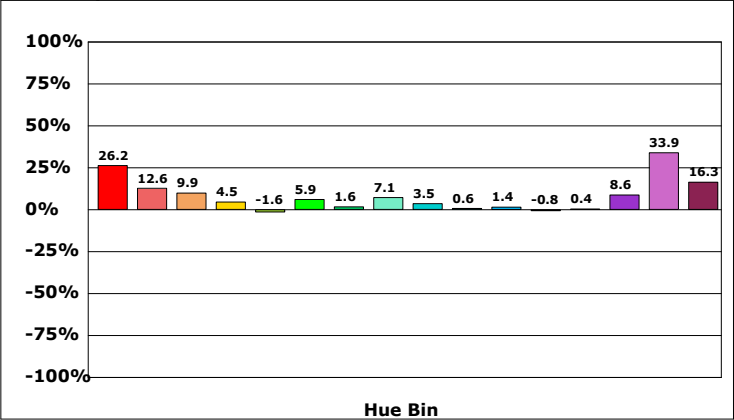

产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

