

2700K-6500K

RDM
Control

COB
100W+100W

ZOOM

Flicker Free

95
CRI

Event 120T 是一款紧凑型 LED 聚光灯，100W 暖白+ 100W 冷白 LED。25° ~ 60° 变焦，CRI 95+, R9 90+, 可旋转控制调光器。它能提供平滑、柔和的平面光场。


主要特点:

- 100W 暖白 + 100W 冷白
- 2700K ~ 6500K 色温可调
- CRI 95+, R9≥90
- 25° - 60° 手动调节变焦
- 调光平滑，无闪烁
- 超级紧凑，易于安装
- 旋钮、按键、DMX控制调光
- 符合DMX-RDM标准
- 4叶遮菲可旋转
- 可选择轨道安装版本
- 智能恒功率，全亮也是100W

适用场景:

- 新闻采访
- 微电影拍摄
- 小型活动
- 婚礼拍摄
- 展览照明

配件:



遮菲



色片夹


EVENT 120T

100W二合一变焦聚光灯



照度图


WW(lx)	11500	3160	1370	764	494	336	247	194	152	135
CW(lx)	17400	4730	2070	1160	742	512	368	285	222	189
全亮 (lx)	12800	3490	1530	863	556	383	278	216	169	146

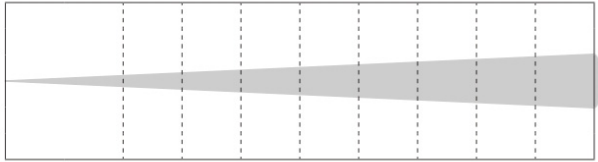

距离 (m)	1	2	3	4	5	6	7	8	9	10
直径 (m)		0.89	1.33	1.77	2.22	2.66	3.10	3.55	3.99	4.43

25°


显色指数

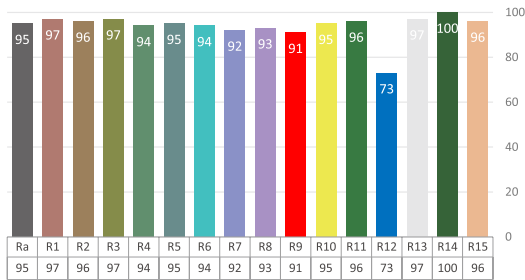

参数



输入电压:	AC100-240V, 50/60Hz
光源:	100W 暖白 + 100W 冷白
色温:	2700K ~ 6500K 可调
变焦:	25° - 60° 手动变焦
显色性:	CRI 95, R9≥90+
电源:	电源进/出
信号:	3-芯XLR 进/出(5-芯可选)
控制通道:	1/2/3/5
控制模式:	DMX, RDM, 旋钮

WW(lx)	2150	580	261	152	101	74	56	44	35	29
CW(lx)	2860	788	351	205	136	100	76	59	46	38
全亮 (lx)	2200	613	274	160	156	79	60	46	37	30

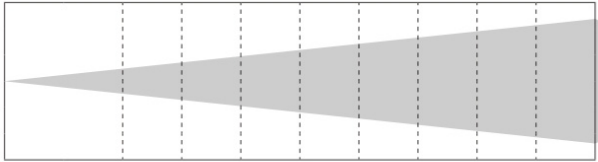

距离 (m)	1	2	3	4	5	6	7	8	9	10
直径 (m)		3.13	4.70	6.27	7.83	9.40	10.97	12.53	14.10	15.67

60°



外壳:	黑色
尺寸:	212 x 165 x 262mm
净重.:	2.3 kg(包含遮菲重量.)
毛重:	2.8 kg
认证:	CE
防护等级:	IP20