



2700K - 6000K



RDM
Control



COB
100W LED



ZOOM



Flicker Free



97
TLCI



95
CRI

Event 200T is a 200Watt WW + 200Watt CW powered LED fresnel with zoom function. The RDM-DMX compliant, 25°- 65°manual zoom along with it's superior 95 CRI make this fixture a good replacement for the tradi tional fresnels. A fixture designed for ehbitons.


Key features:

- 200Watt WW + 200W CW COB white LED
- 2700K - 6000K tunable color temperature
- Average R9≥95, TLCI 97
- Soft and even wash effect
- 25° - 65° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in connection

Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition

Accessories:



barn door



Gel frame




EVENT 200T

200W tunable white LED fresnel zoom



Photometric


2700K(lx)	23300	6950	2650	1620	1120
6000K(lx)	33200	10100	3880	2340	1560
4000K(lx)	19300	5910	2280	1380	938

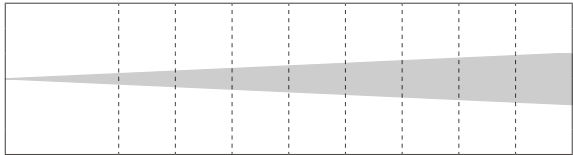

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.55	1.11	1.66	2.22	2.77

25°





2700K(lx)	5970	1930	747	457	373
6000K(lx)	9150	2800	1070	648	558
4000K(lx)	4960	1610	628	391	316

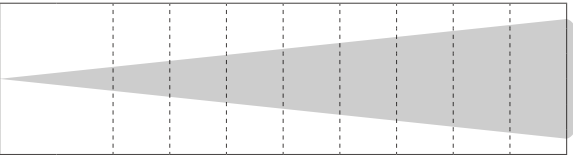

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.7	3.4	5.1	6.8	8.5

65°

Color Rendition

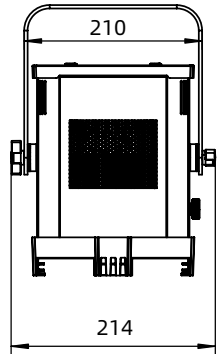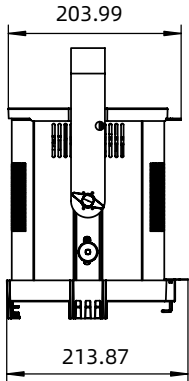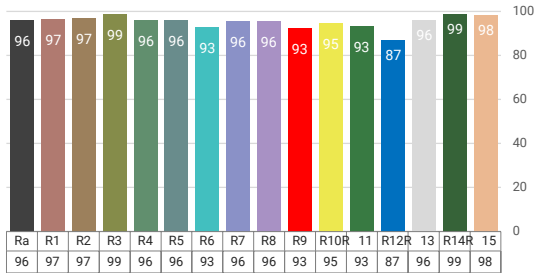

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Control mode:	Knob, DMX, RDM
Light source:	200W WW + 200W CW	Housing:	Color black
Color temperature:	2700K - 6000K tunable	Size:	319 x 204 x 241mm
Zoom range:	25° - 60° manual zoom	N.W.:	3.5 kg(barn door incl.)
Color Rendition:	CRI 95+, TLCI 97	G.W.:	6 kg
Power connection:	PowerCON in & out	Accessories(incl.):	Power cable, barndoor, gel frame, Safety rope
Signal connection:	3-pin XLR in & out	Environment:	IP20
Control channels:	1/2/3/5		