

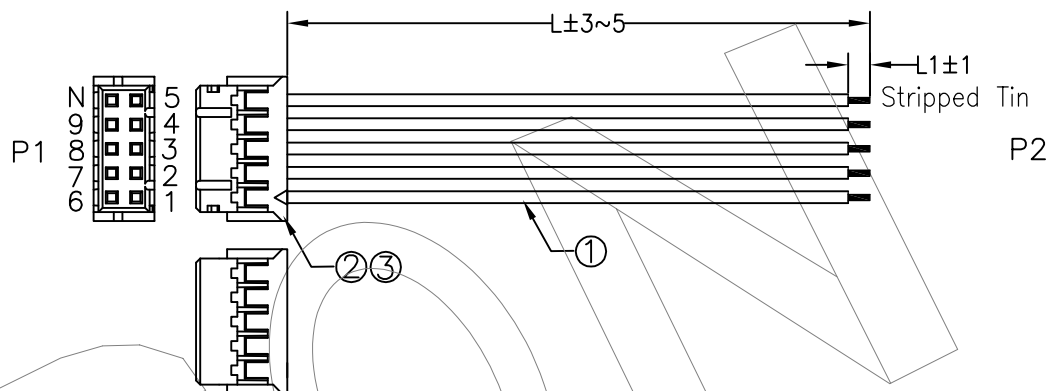

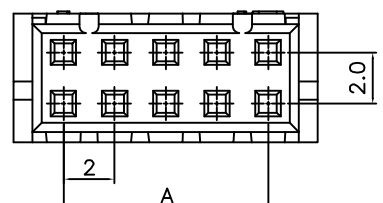




Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

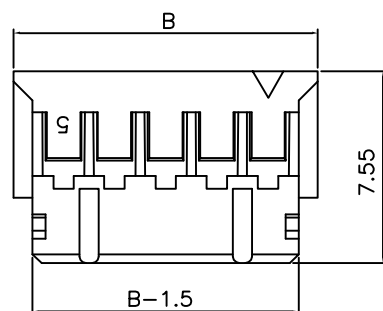

### Ordering Information

HC-WH 20\*2-S-2\*X-SN-XX-XX-X-XXX-03

Wire Harness Pitch 20\*2=2.0Pitch\*2 S=Standard C=Customized No. of Pins 2\*2P~2\*20P Contact Plating SN=Plating Tin CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special Wire AWG 28=28AWG 26=26AWG 24=24AWG 22=22AWG Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White Length 100=100mm Serial number

### REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

|     |                               |      |
|-----|-------------------------------|------|
| 3   | PHD2.0mm terminal,Plating Tin | XPCS |
| 2   | PHD2.0mm 2*XP Housing,White   | 1PCS |
| 1   | 28AWG~22AWG XX Color          | XPCS |
| NO. | MATERIAL&SPECIFICATION        | Q'ty |

| Poles | Part No.    |           | Dimensions mm |      |
|-------|-------------|-----------|---------------|------|
|       |             |           | A             | B    |
| 4     | PHD20-H02*2 | PHD-2*2P  | 2.00          | 5.9  |
| 6     | PHD20-H03*2 | PHD-2*3P  | 4.00          | 7.9  |
| 8     | PHD20-H04*2 | PHD-2*4P  | 6.00          | 9.9  |
| 10    | PHD20-H05*2 | PHD-2*5P  | 8.00          | 11.9 |
| 12    | PHD20-H06*2 | PHD-2*6P  | 10.00         | 13.9 |
| 14    | PHD20-H07*2 | PHD-2*7P  | 12.00         | 15.9 |
| 16    | PHD20-H08*2 | PHD-2*8P  | 14.00         | 17.9 |
| 18    | PHD20-H09*2 | PHD-2*9P  | 16.00         | 19.9 |
| 20    | PHD20-H10*2 | PHD-2*10P | 18.00         | 21.9 |
| 22    | PHD20-H11*2 | PHD-2*11P | 20.00         | 23.9 |
| 24    | PHD20-H12*2 | PHD-2*12P | 22.00         | 25.9 |
| 26    | PHD20-H13*2 | PHD-2*13P | 24.00         | 27.9 |
| 40    | PHD20-H20*2 | PHD-2*20P | 38.00         | 41.9 |

|   |     |            |                          |           |        |         |        |            |       |     |                                                                |  |                                   |
|---|-----|------------|--------------------------|-----------|--------|---------|--------|------------|-------|-----|----------------------------------------------------------------|--|-----------------------------------|
|   |     |            |                          | OPERATION |        | DRAW    | BoFeng | 2020.04.20 | SCALE | FIT | <b>HECON</b> 东莞市禾康电子有限公司<br>DONGGUAN HECON ELECTRONICS CO.,LTD |  |                                   |
|   |     |            |                          | X.X       | ±0.30  |         |        |            | UNIT  | mm  |                                                                |  |                                   |
|   |     |            |                          | X.XX      | ±0.20  |         |        |            | SIZE  | A4  |                                                                |  |                                   |
|   |     |            |                          | X.XXX     | ±0.10  | CHECK   | Jack L | 2020.04.20 | SHEET | 1/1 | PART NO.                                                       |  | HC-WH20*2-S-2*X-SN-XX-XX-X-XXX-03 |
|   |     |            |                          |           |        |         |        |            | PROJ. | 1/1 | TITLE:                                                         |  | PHD2.0-2*XP TO Stripped Tin       |
| A | A0  | 2020.04.20 | NEW DRAWING              |           |        | APPROVE |        |            |       |     |                                                                |  |                                   |
|   | REV | DATE       | MODIFICATION DESCRIPTION |           | CHANGE | DIM     | TOL    |            |       |     |                                                                |  |                                   |