
# Data sheet

## 15305.2 SD-S 37CZ

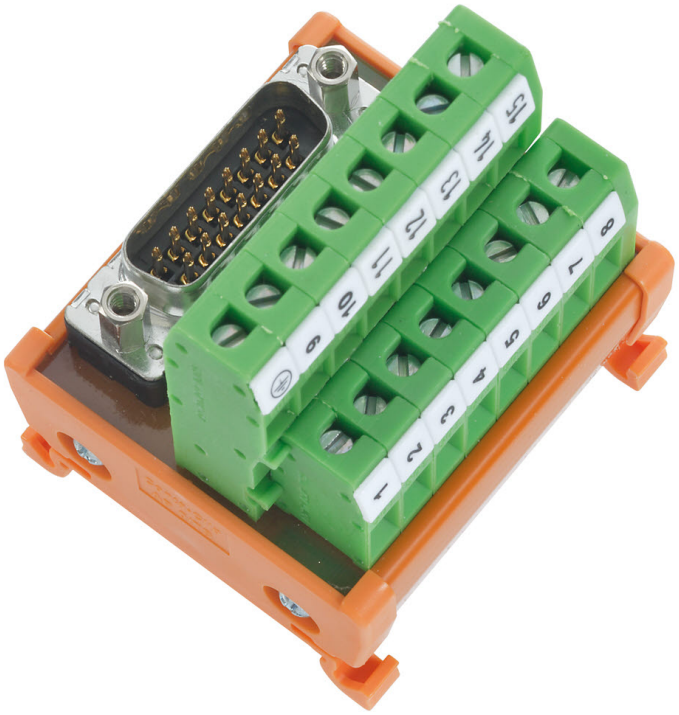

Interface module for D-SUB, Tension-spring connection and male D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 37

### Business data

| | |
|---|---|
| Article number | 15305.2 |
| Article name | SD-S 37CZ |
| GTIN (EAN) | 4044211078737 |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 91.9 g |
| Weight per piece (including packaging) | 134.8 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | NL |
| Product description | Interface module |

# Data sheet

## 15305.2 SD-S 37CZ

## Technical data

| | |
|---|---|
| **Dimensions** | |
| Length | 47 mm |
| Width | 107 mm |
| Height TS 35/7.5 | 38 mm |
| **Ratings** | |
| Overvoltage category | III |
| Contamination degree | 2 |
| **Connection data** | |
| Connection principle | Tension-spring connection |
| Number of connections | 1 |
| No. of poles | 37 |
| Wire cross-section single core (rigid), min. | 0.08 mm² |
| Wire cross-section single-core (rigid), max. | 2.5 mm² |
| Wire cross-section stranded, min. | 0.14 mm² |
| Wire cross-section stranded, max. | 2.5 mm² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.14 mm² |
| Wire cross-section stranded with wire-end ferrules, max. | 1.5 mm² |
| Stripping length | 6 mm |
| **Input data** | |
| Max. operating voltage AC/DC | 125 V |
| Current load per channel, max. | 1,5 A |
| **Materials** | |
| Working temperature, min. | -20 °C |
| Working temperature, max. | 50 °C |
| **Further technical data** | |
| Mounting type | TS 35 |
| Connector type | D-sub male plug |
| Test voltage | 0.67 kV |
| Shielded | ✓ |

# Data sheet

## 15305.2 SD-S 37CZ

## Technical data

### Environmental Product Compliance

| | |
|---|---|
| REACH Conform | yes |
| REACH Reference date | 2022-06-10 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |


## Approvals


### Standards and regulations

| | |
|---|---|
| Standards / specifications | DIN VDE 0110 / EN 50178 |

# Data sheet
## 15305.2 SD-S 37CZ

### Media

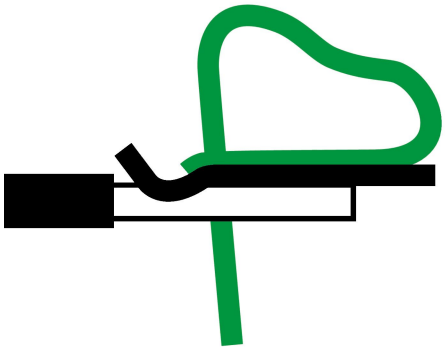

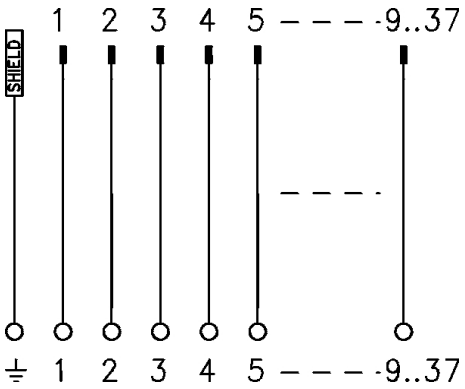

## Accessories