

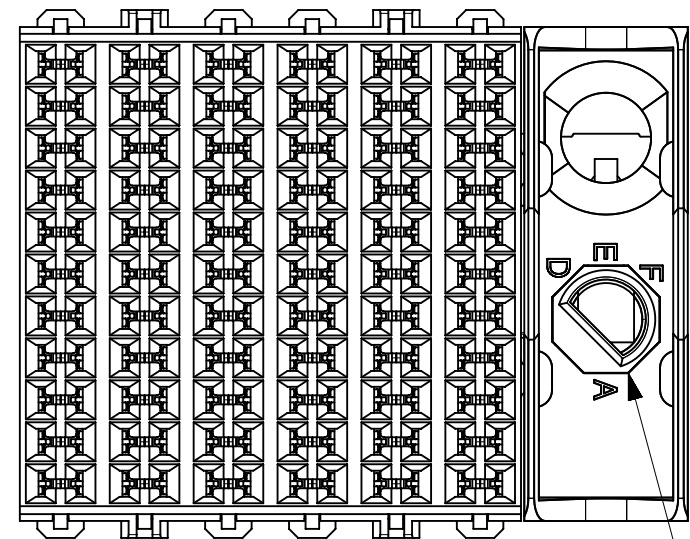
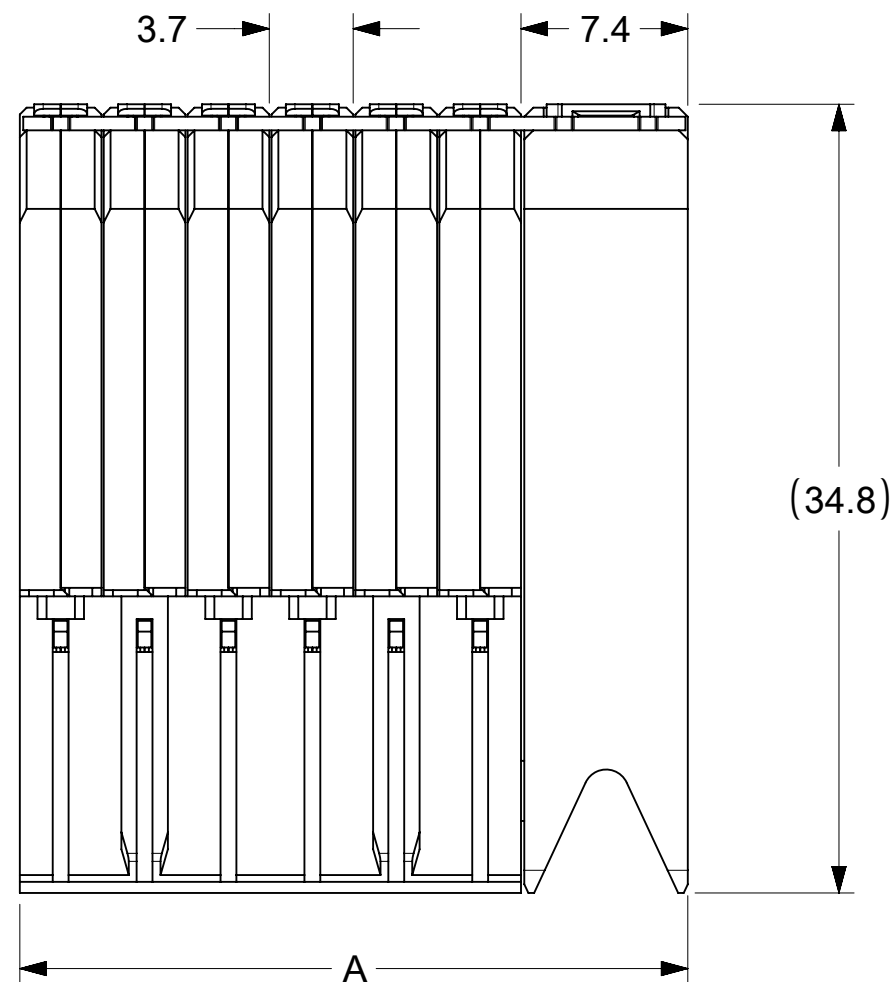
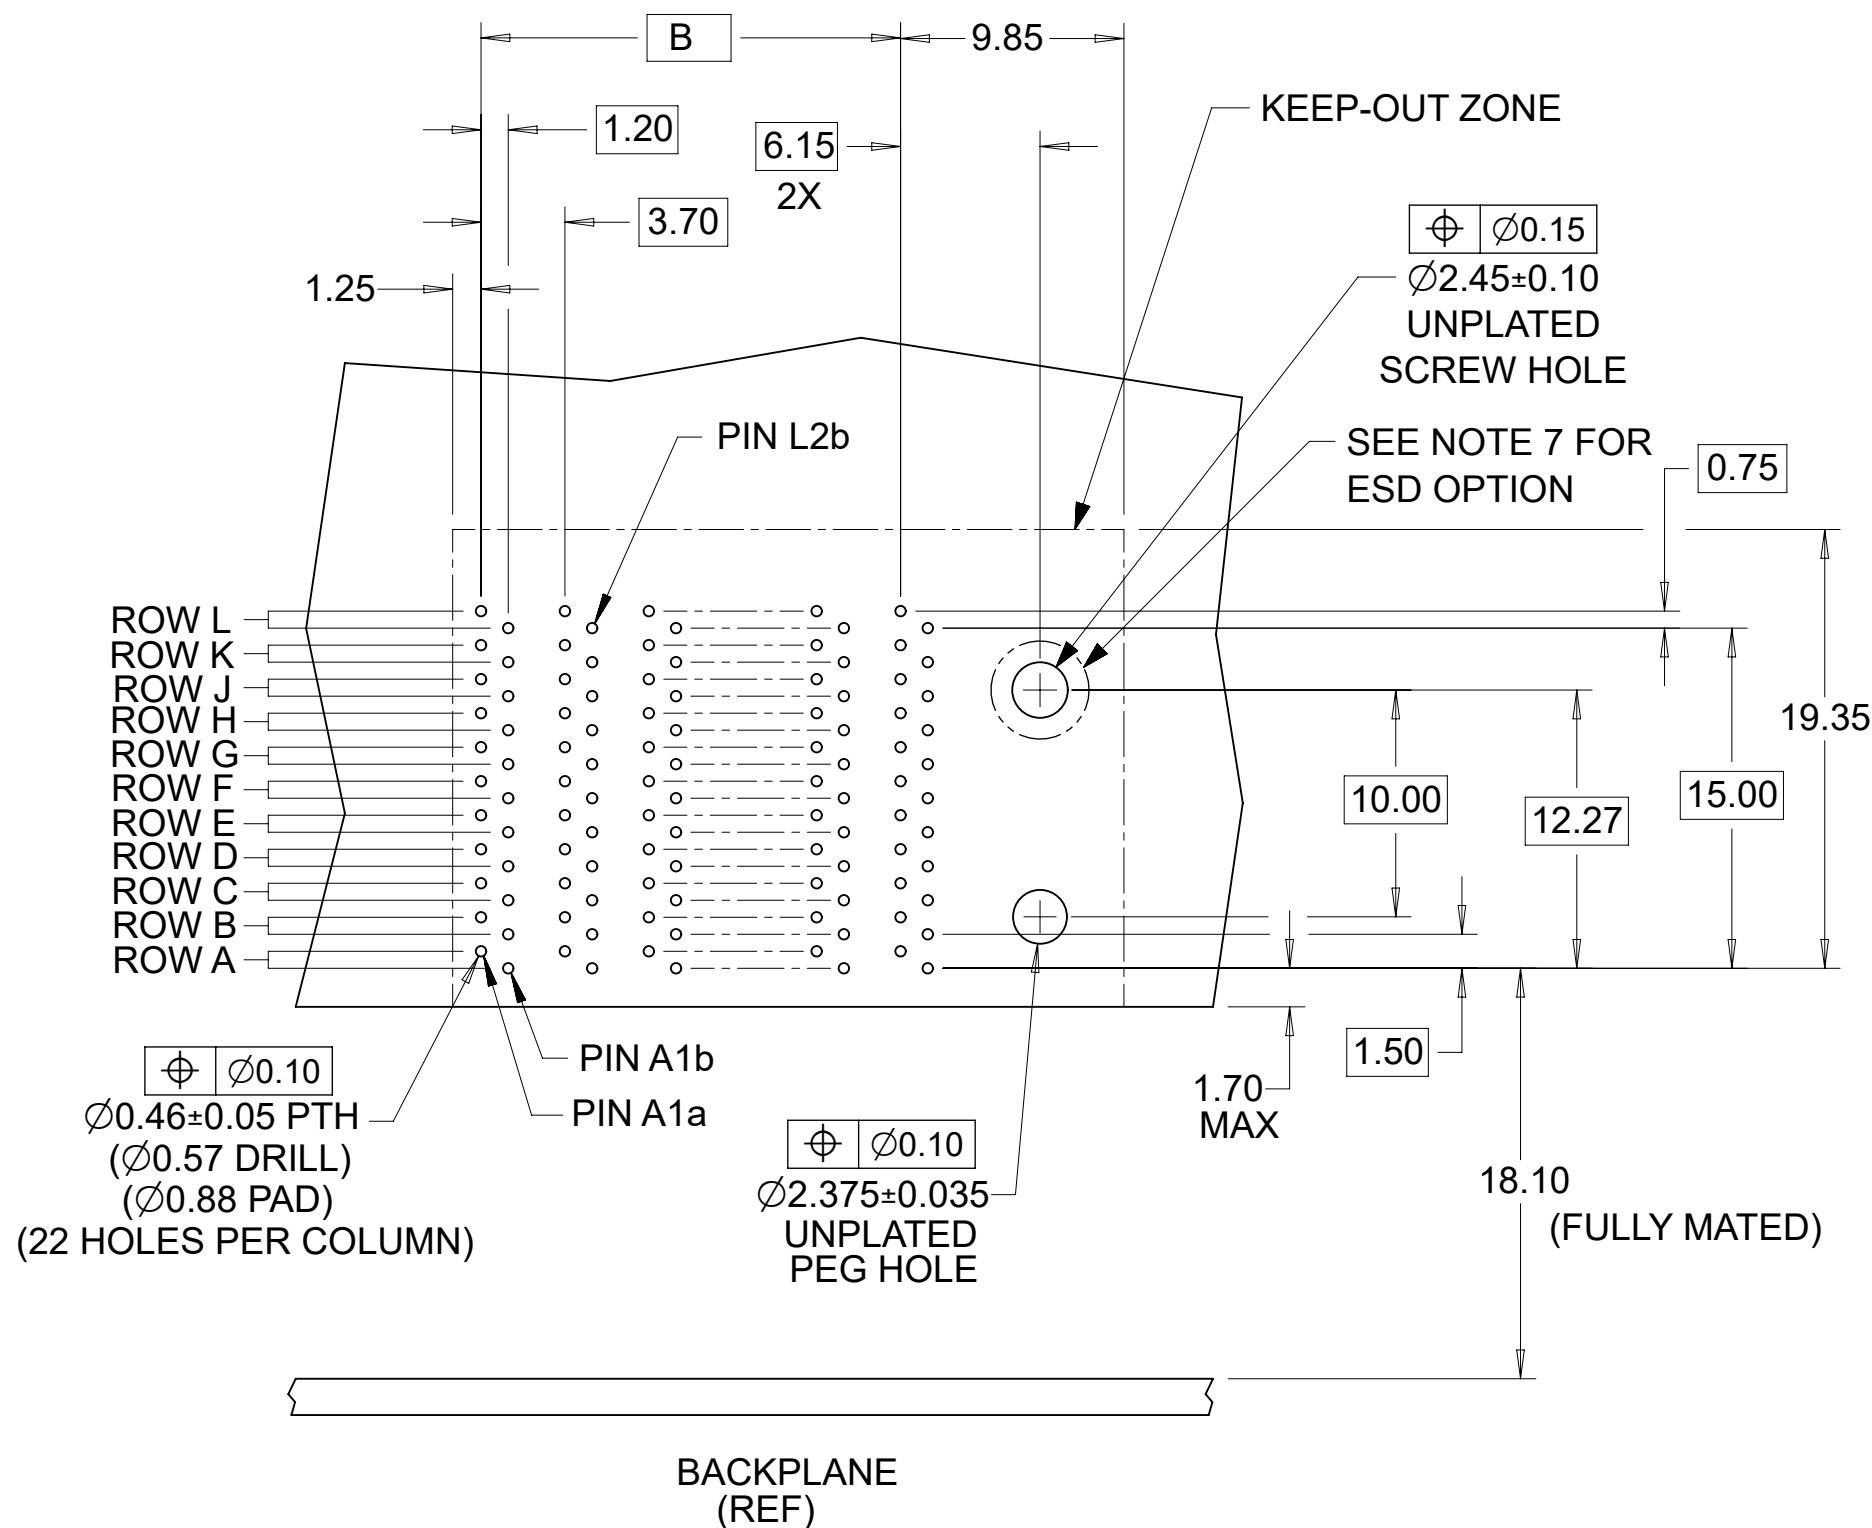


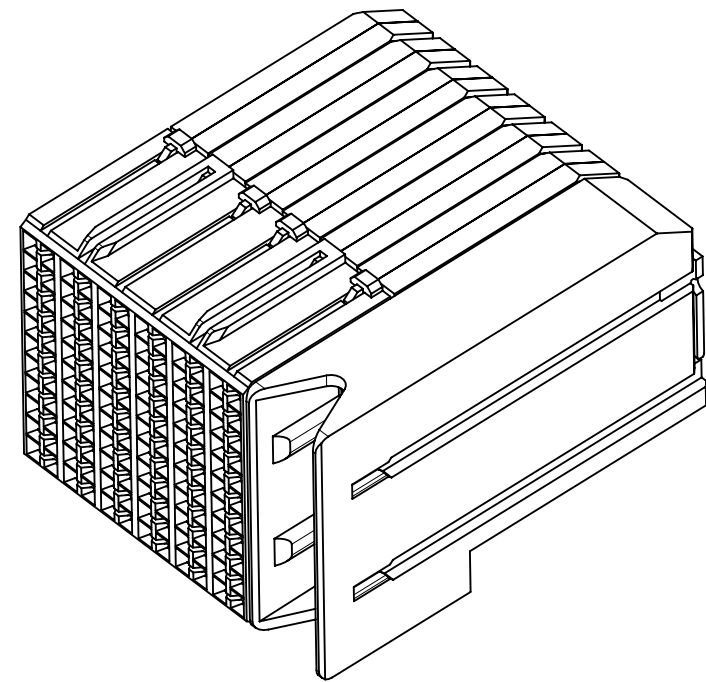

KEY SHOWN IN POSITION "B"

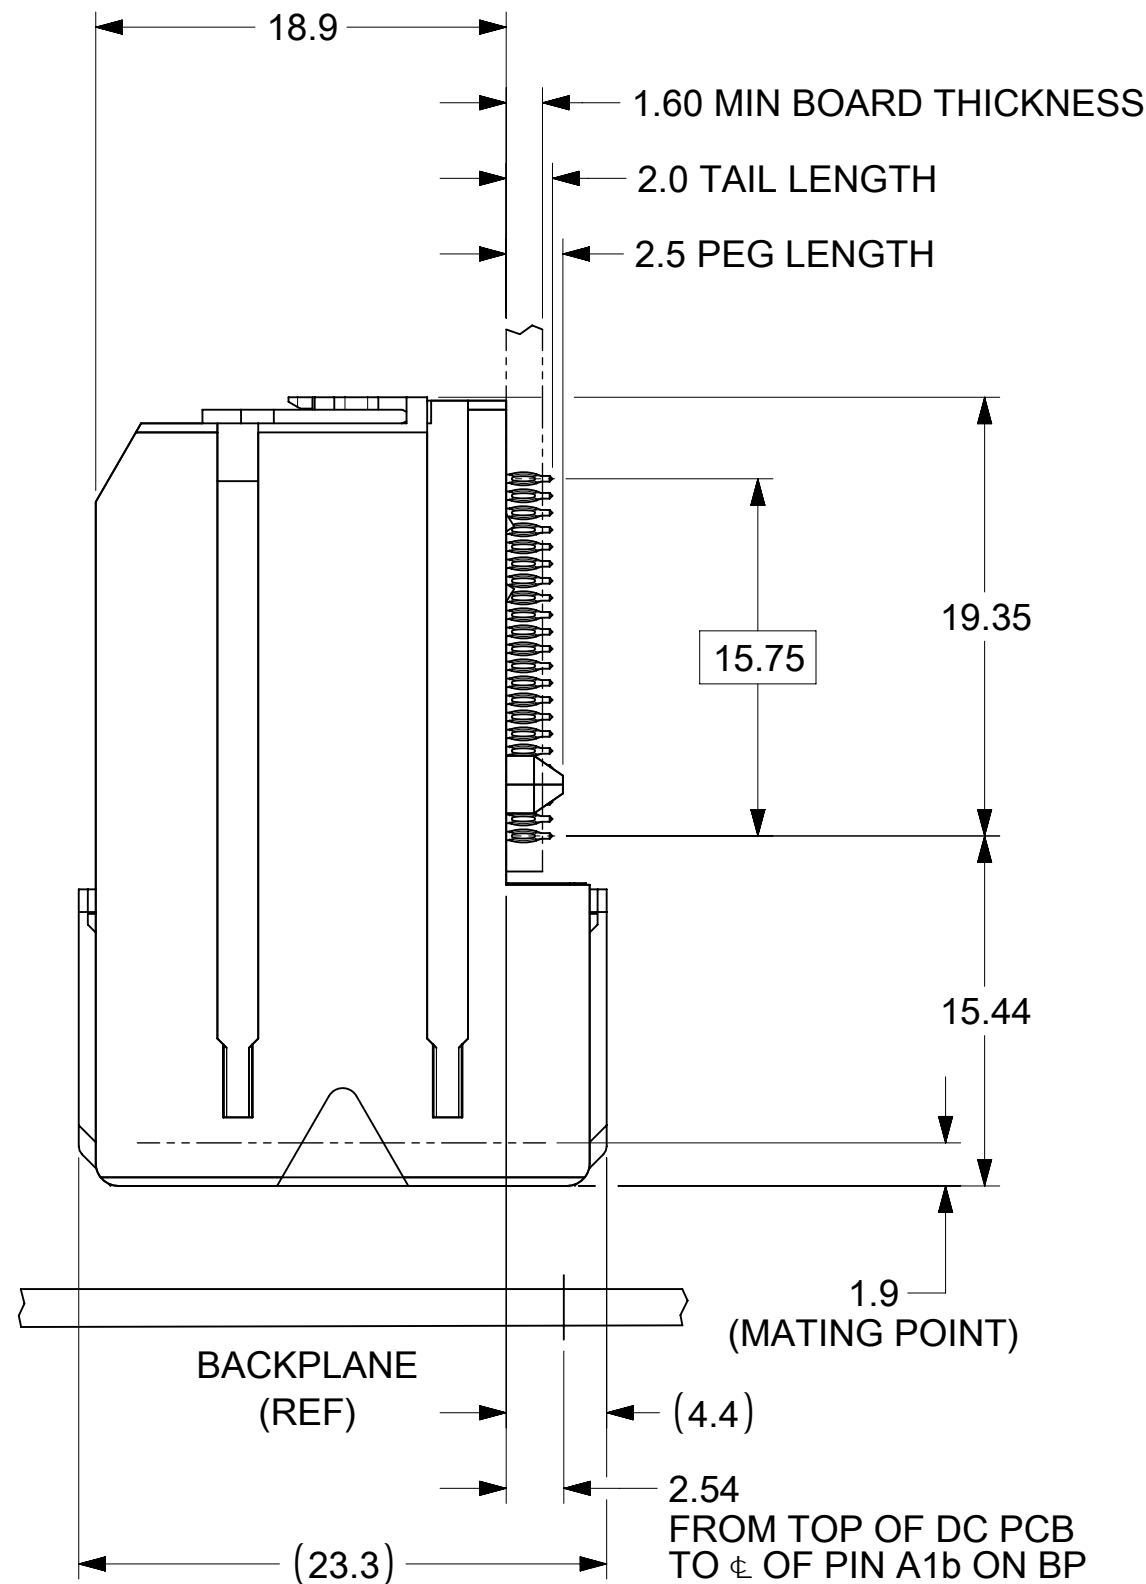

DAUGHTERCARD HOLE PATTERN (CONNECTOR SIDE)

NOTES:

1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL94V-0
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
2. FINISH: SELECTIVE GOLD IN CONTACT AREA.
SLECTIVE MATTE TIN ON PCB TAILS. NICKEL OVERALL
3. REFER TO MOLEX PRODUCT SPECIFICATION PS-75710-999 FOR PERFORMANCE SPECS.
4. PRODUCT IS PACKAGED PER PK-70873-609.
5. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
6. GUIDED PARTS TO BE SHIPPED WITH 2-32 TYPE AB
SELF-TAPPING SCREW P/N 73726-0000.
7. FOR GROUNDED GUIDE MODULES USE DIA 2.45+/-0.10 (PTH), DIA 2.58 (DRILL).
AND DIA 4.50 (PAD)
8. MAPS (MOLEX ADVANCED PLATING SYSTEM)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMASTERED TO NX		molex						
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)												
ANGULAR TOL		± 0.5 °				I-TRAC DAUGHTERCARD 11 ROW SIGNAL MODULE GUIDE RIGHT SALES DWG						
4 PLACES		±				EC NO: 671119 DRWN: YOGEEB CHK'D: VINODM3 APPR: CWANG25		2021/06/28 2022/01/31 2022/02/18		PRODUCT CUSTOMER DRAWING		
3 PLACES		±		INITIAL REVISION:		DOCUMENT NUMBER		DOC TYPE	DOC PART			REVISION
2 PLACES		± 0.13		DRWN: MCARRANZA APPR: JLAURX		2006/06/19 2006/06/21		SD-75710-004	PSD			001
1 PLACE		± 0.25										
0 PLACES		±										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
				C-SIZE	75710	SEE TABLE		GENERAL MARKET		1 OF 2		

75710- * * * *

MODULE TYPE -- TAIL PLATING TYPE
GUIDE RIGHT -- MATTE TIN (FORMERLY TIN/LEAD) = 4
GUIDE RIGHT -- MATTE TIN = 5

POLARIZATION KEY ORIENTATION
0 = NO KEY
1 = A 5 = E
2 = B 6 = F
3 = C 7 = G
4 = D 8 = H

OF COLUMNS/PLATING
05 = 5 COL 30 GOLD
06 = 6 COL 30 GOLD
08 = 8 COL 30 GOLD
10 = 10 COL 30 GOLD
55 = 5 COL W/ESD 30 GOLD
56 = 6 COL W/ESD 30 GOLD
58 = 8 COL W/ESD 30 GOLD
50 = 10 COL W/ESD 30 GOLD
25 = 5 COL 10 GOLD (MAPS)
26 = 6 COL 10 GOLD (MAPS)
28 = 8 COL 10 GOLD (MAPS)
20 = 10 COL 10 GOLD (MAPS)
65 = 5 COL W/ESD 10 GOLD (MAPS)
66 = 6 COL W/ESD 10 GOLD (MAPS)
68 = 8 COL W/ESD 10 GOLD (MAPS)
60 = 10 COL W/ESD 10 GOLD (MAPS)

MATERIAL NUMBER	# OF COLUMNS	DIM "A" MAX	DIM "B"
75710-***5	5	25.90	14.80
75710-***6	6	29.60	18.50
75710-***8	8	37.00	25.90
75710-***0	10	44.40	33.30

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC: REMASTERED TO NX		molex			
mm	NTS	EC NO: 671119 DRWN: YOGEEB CHK'D: VINODM3 APPR: CWANG25		I-TRAC DAUGHTERCARD 11 ROW SIGNAL MODULE GUIDE RIGHT SALES DWG			
GENERAL TOLERANCES (UNLESS SPECIFIED)				PRODUCT CUSTOMER DRAWING			
ANGULAR TOL	± 0.5 °			DOCUMENT NUMBER			
4 PLACES	±			SD-75710-004			
3 PLACES	±			PSD			
2 PLACES	± 0.13	INITIAL REVISION:		DOC TYPE	DOC PART	REVISION	
1 PLACE	± 0.25	DRWN: MCARRANZA			001	E1	
0 PLACES	±	APPR: JLAURX		SHEET NUMBER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			C-SIZE	75710	SEE TABLE	GENERAL MARKET	2 OF 2

12

11

10

9

8

7

6

5

4

3

2

1