

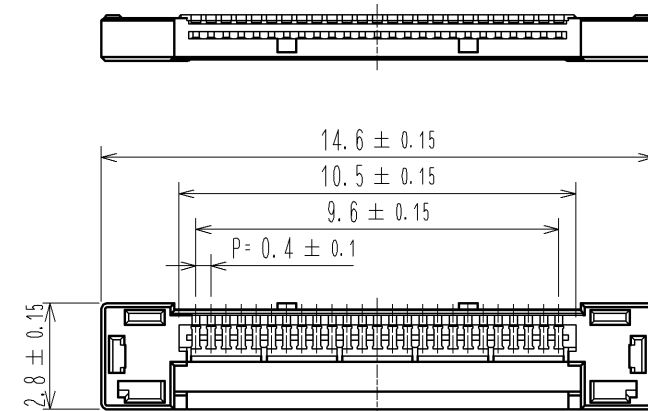
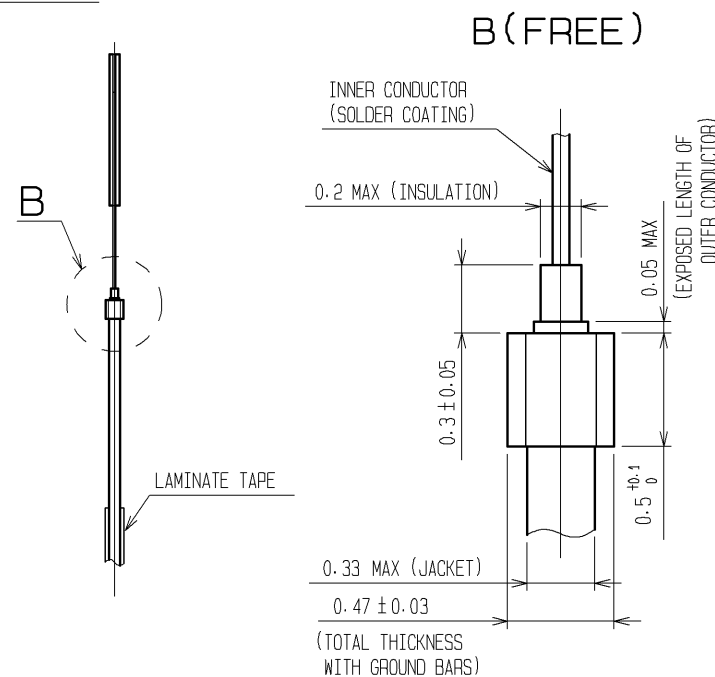



RECOMMENDED CABLE SUBASSEMBLY

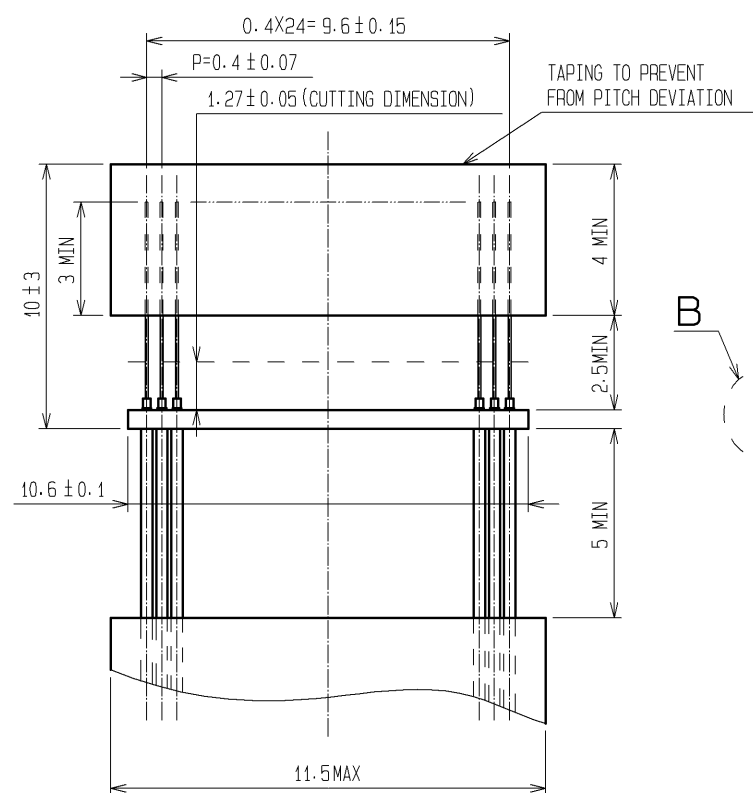

A-A(FREE)

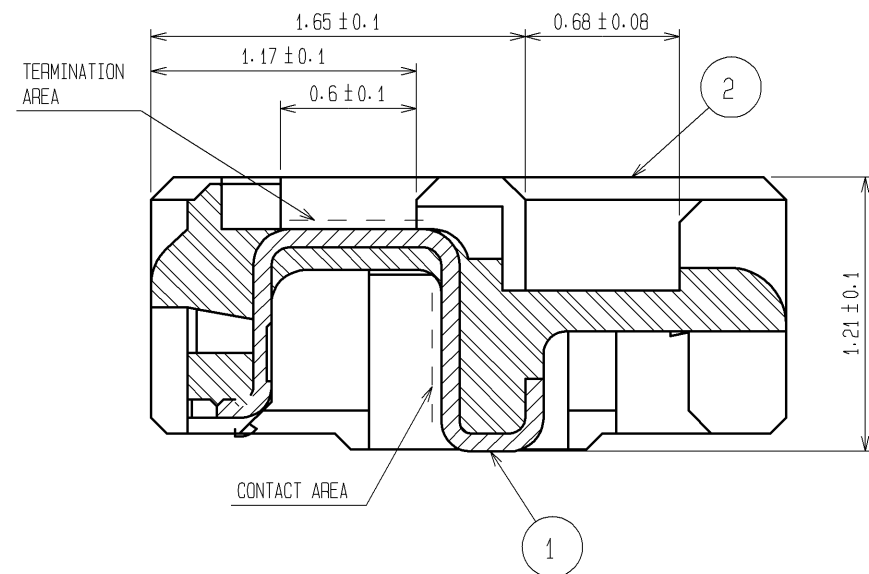

CABLE TERMINATION FIGURE(FREE)

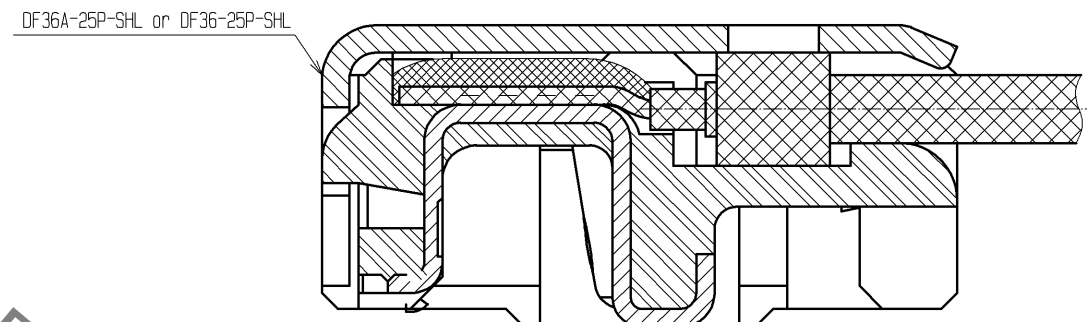


- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42~AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGCABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS (CONNECTOR UNIT, AND METAL SHIELDING). REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.
APPLICABLE SHELL IS DIFFERENT DEPENDING ON THE PART No. OF MATED CONNECTOR.
USE DF36A-25P-SHL FOR DF36A-25S-0.4V(**), USE DF36-25P-SHL FOR DF36-25S-0.4V(**).

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36-25P-0.4SD(51)	CL662-4006-4-51
-	METAL SHIELDING	DF36A-25P-SHL	CL662-4007-7-00
-	METAL SHIELDING	DF36-25P-SHL	CL662-4012-7-00


4. BLACK MARKS MAY OCCASIONALLY OCCUR IN MOLD RESIN, YET THEY DO NOT AFFECT CONNECTOR QUALITY.

1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.1µm min TERMINATION AREA : Au PLATING 0.1µm min UNDER PLATING : Ni PLATING 1µm min	5	PS	BLACK
NO.	MATERIAL	FINISH . REMARKS	4	POLYESTER	CLEAR
UNITS mm	SCALE 5 : 1	COUNT △	3	PS	CLEAR
APPROVED : TS. SAKATA	08. 11. 05	DRAWING NO.	2	LCP	UL94V-0
CHECKED : HK. UMEHARA	08. 11. 05	PART NO.	NO.	MATERIAL	FINISH . REMARKS
DESIGNED : HY. SHIOZAWA	08. 11. 05	CODE NO.	CL662-4006-4-51	△	1/2
DRAWN : SI. ISHII	08. 11. 05				

Sep.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

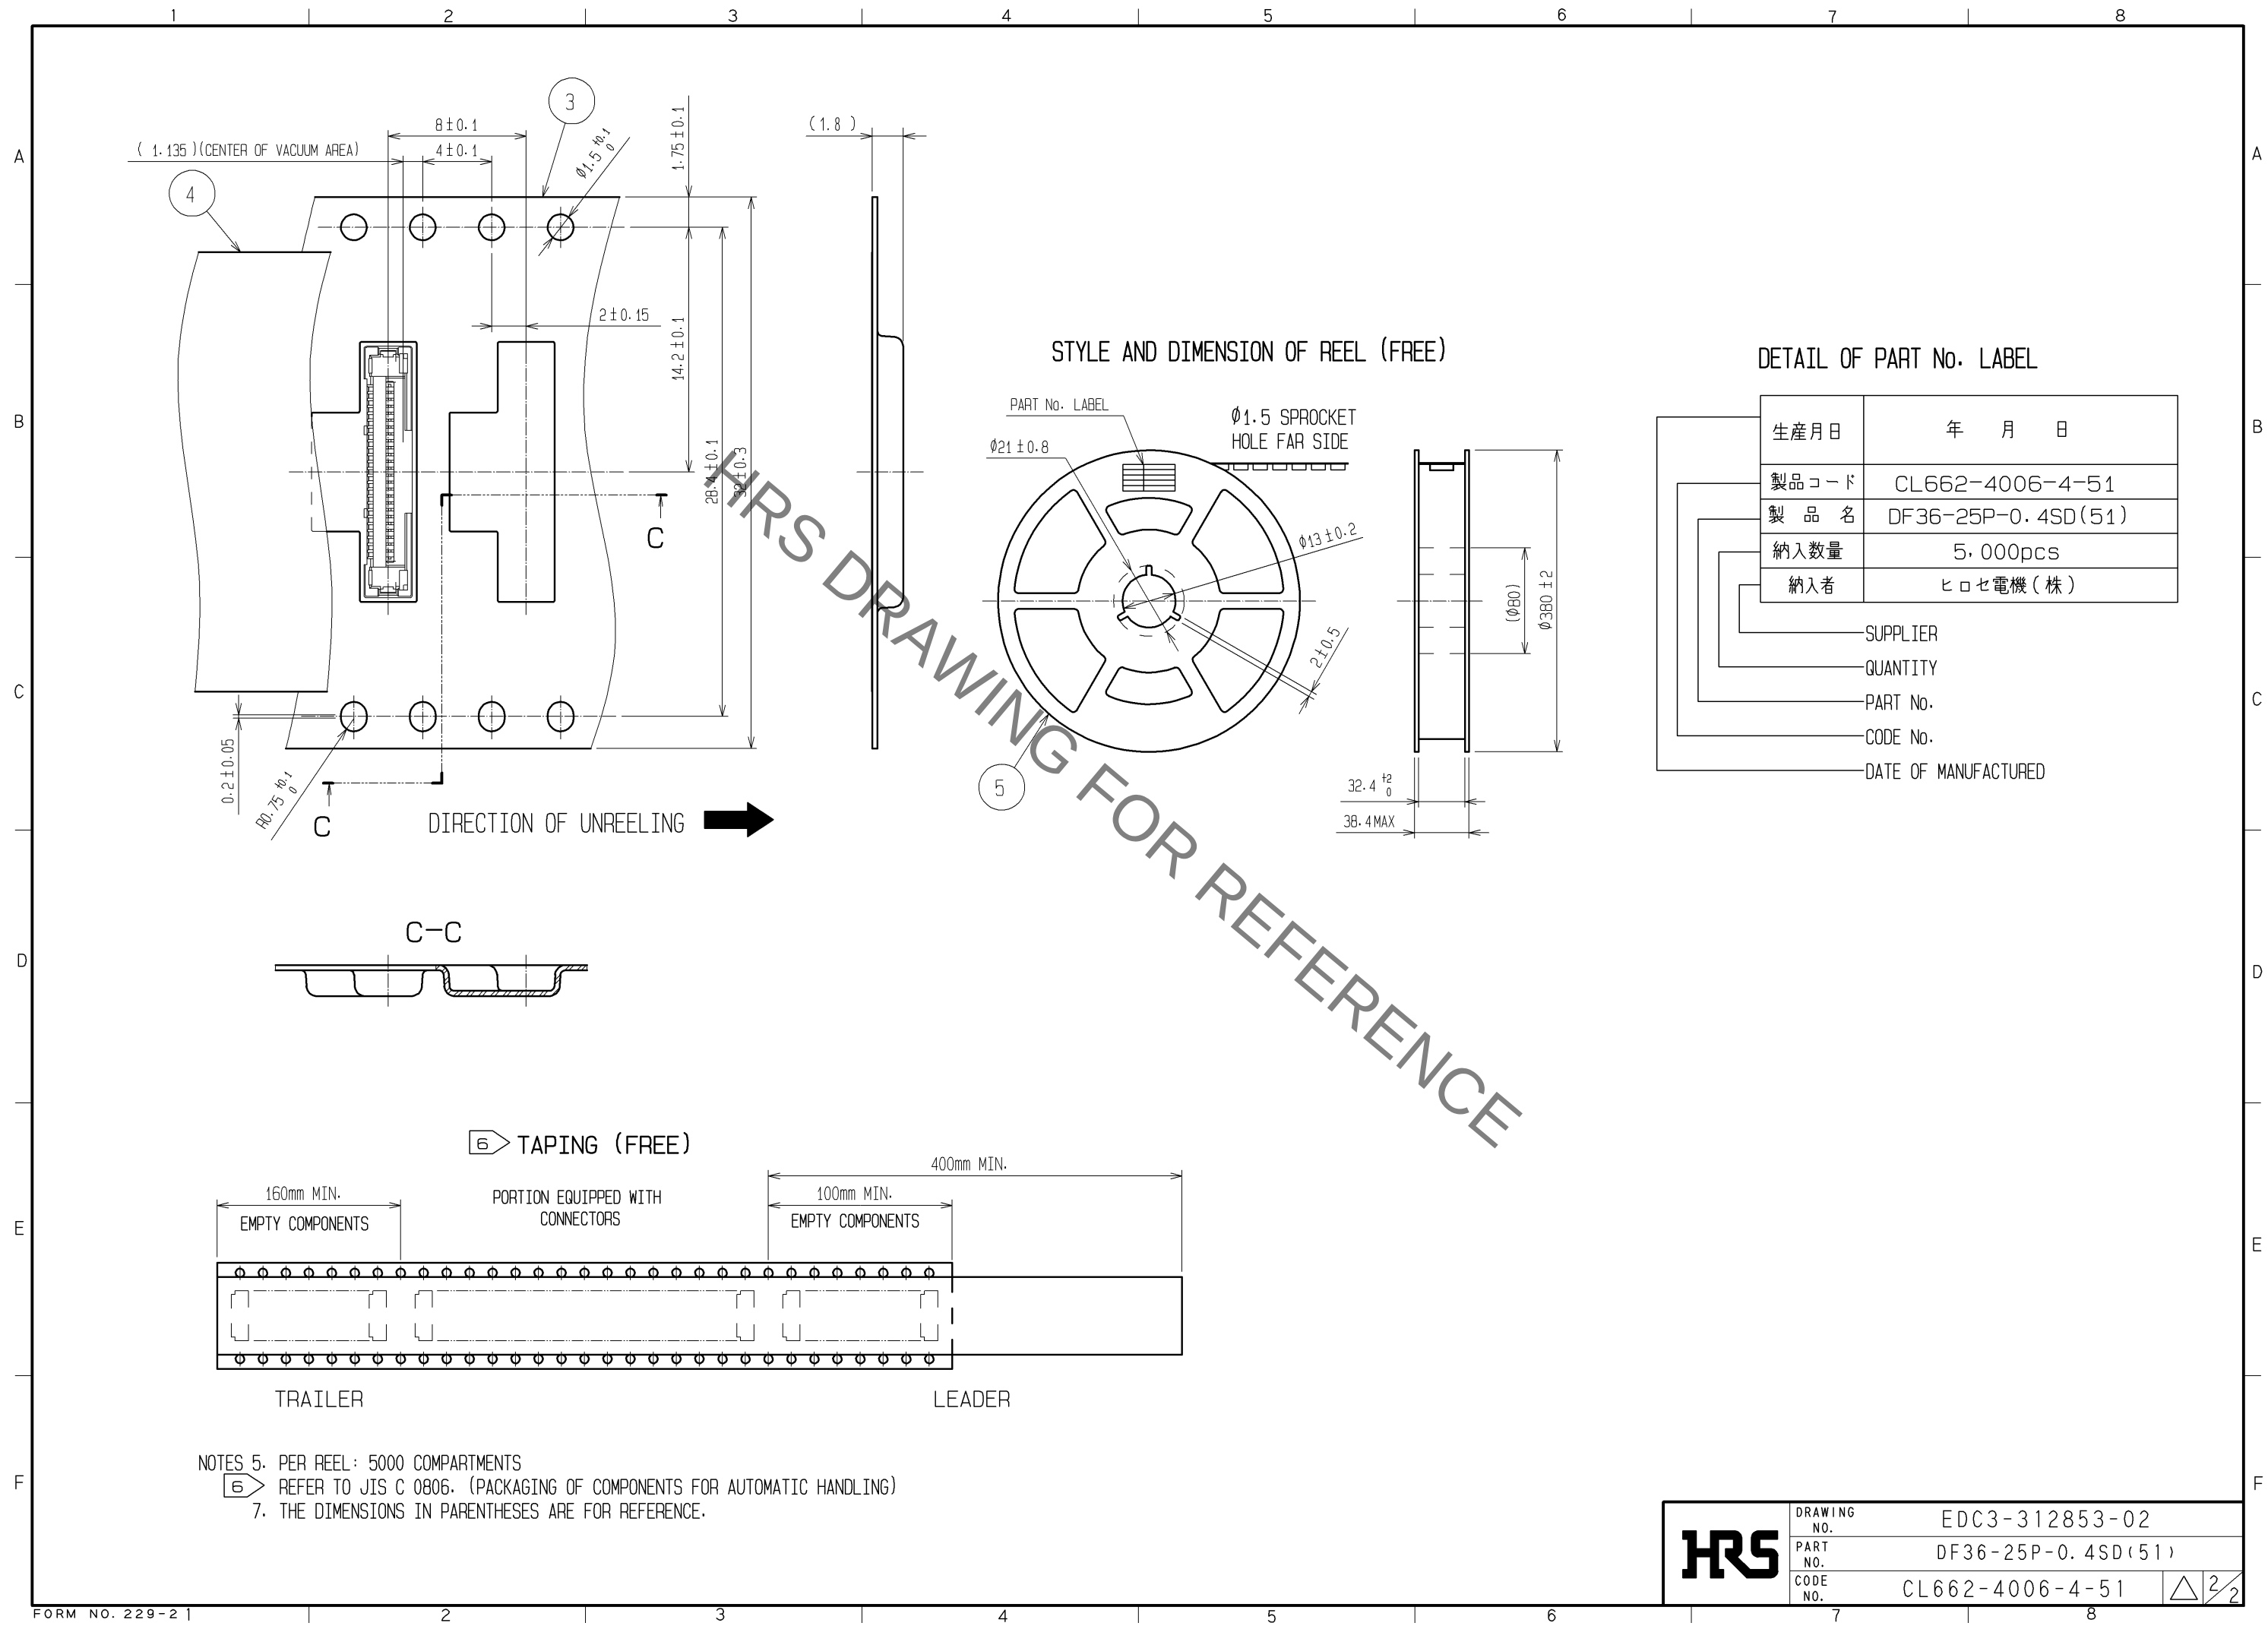


STYLE AND DIMENSION OF REEL (FREE)

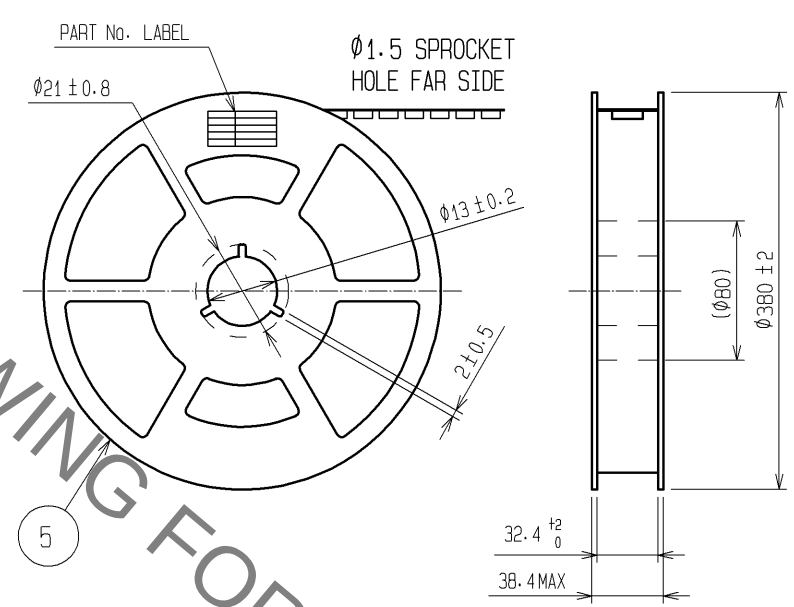

DETAIL OF PART No. LABEL

生産月日	年 月 日
製品コード	CL662-4006-4-51
製品名	DF36-25P-0.4SD(51)
納入数量	5,000pcs
納入者	ヒロセ電機(株)
SUPPLIER	
QUANTITY	
PART No.	
CODE No.	
DATE OF MANUFACTURED	

TAPING (FREE)

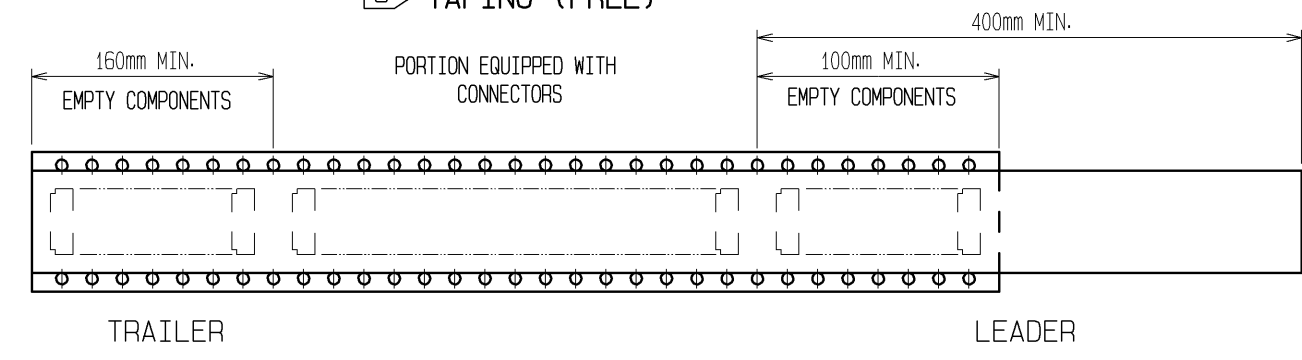

HRS	DRAWING NO.	EDC3-312853-02
	PART NO.	DF36-25P-0.4SD(51)
	CODE NO.	CL662-4006-4-51