
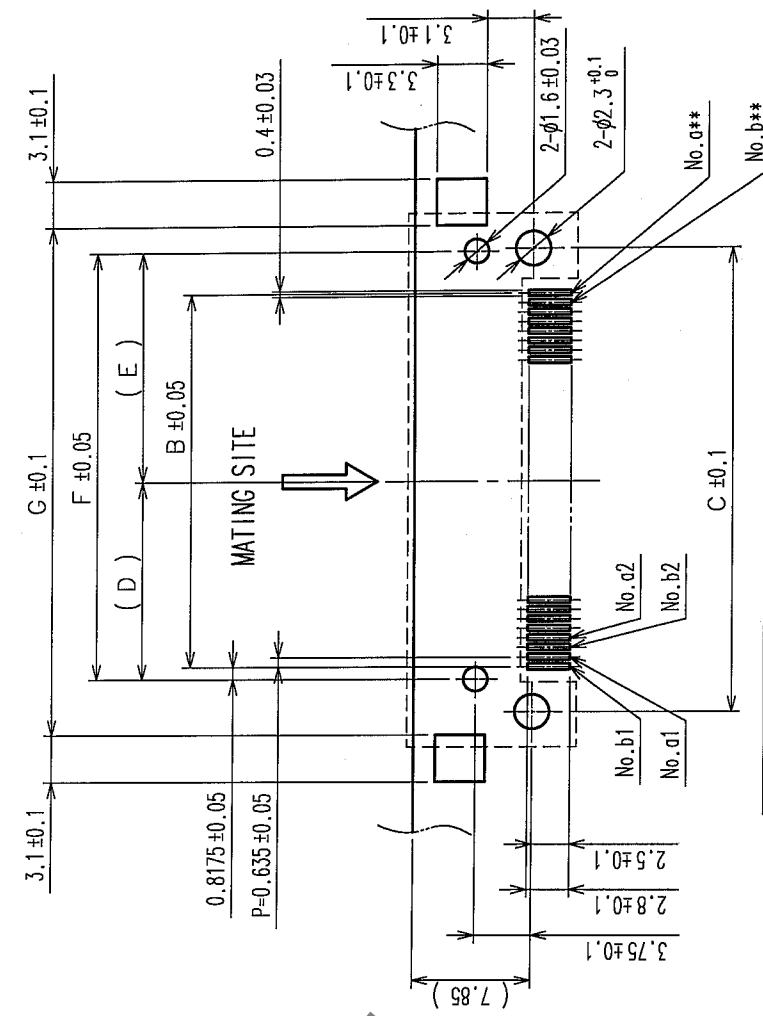
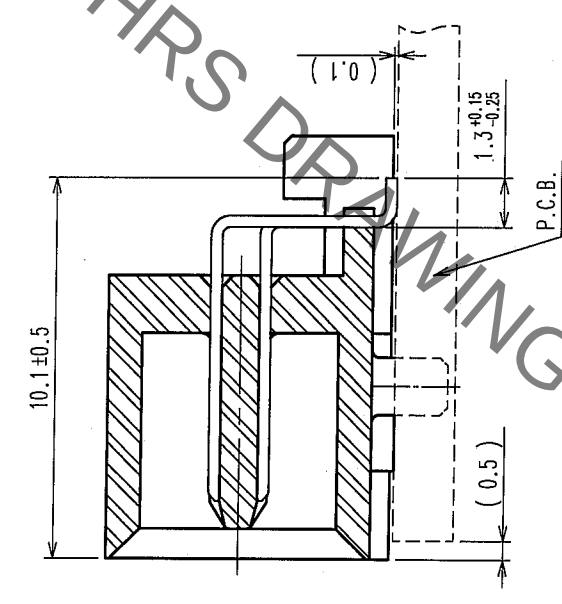

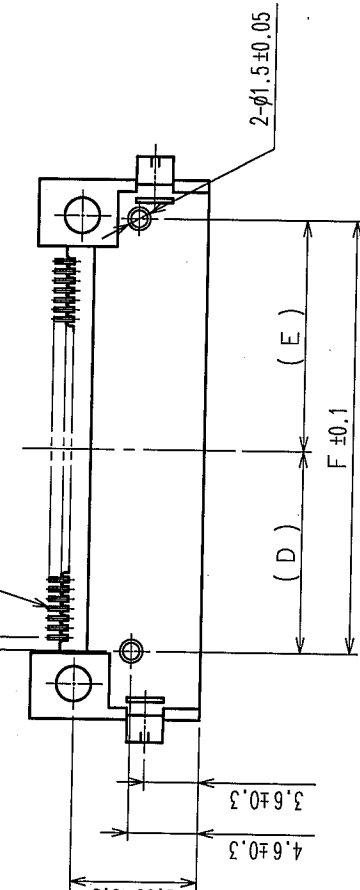
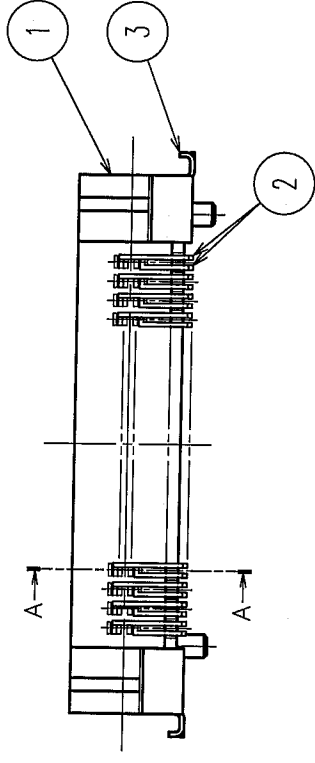
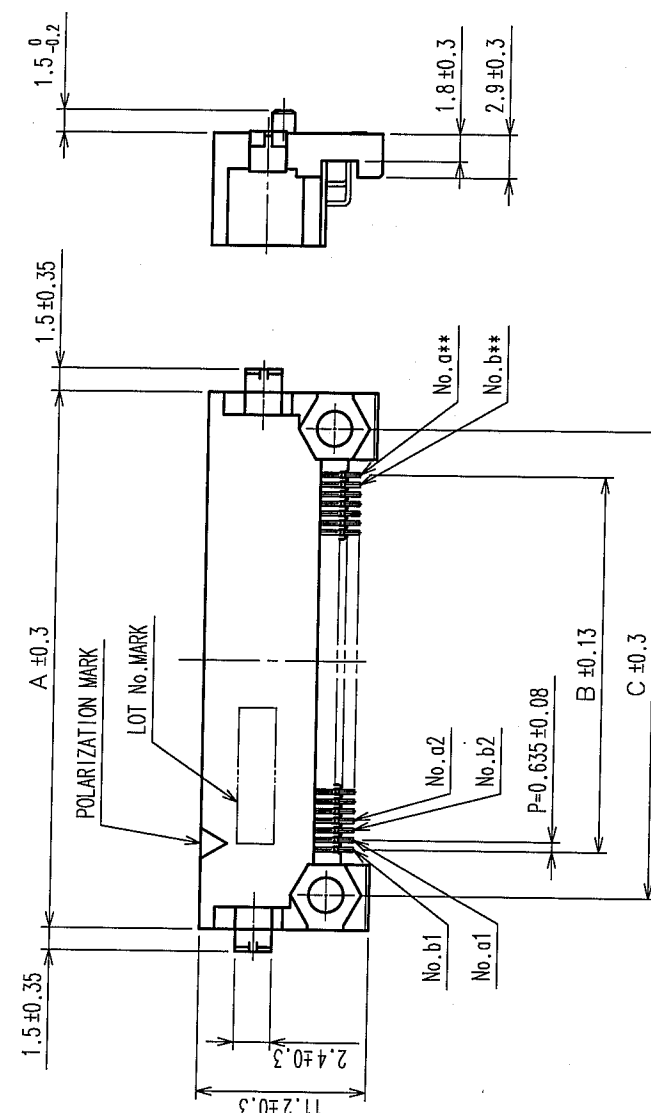


COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					• •	△				• •
△					• •	△				• •
△					• •	△				• •

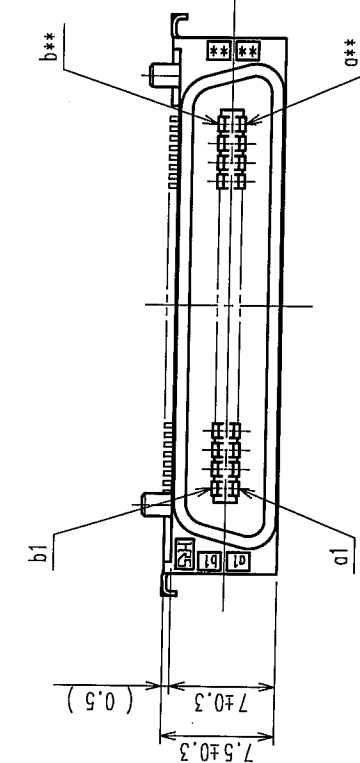

RECOMMENDED P.C.B. LAND PATTERN

PART No.	CODE No.		A	B	C	D	E	F	G	**
FY2-20P-0.635SH(71)	CL572-2761-2-71	20	22.75	12.065	18.05	6.85	8.85	15.70	21.15	10
FY2-40P-0.635SH(71)	CL572-2763-8-71	40	35.45	24.765	30.75	13.20	15.20	28.40	33.85	20
FY2-52P-0.635SH(71)	CL572-2764-0-71	52	43.07	32.385	38.37	17.01	19.01	36.02	41.47	26
FY2-60P-0.635SH(71)	CL572-2765-3-71	60	48.15	37.465	43.45	19.55	21.55	41.10	46.55	30
FY2-80P-0.635SH(71)	CL572-2767-9-71	80	60.85	50.165	56.15	25.90	27.90	53.80	59.25	40
FY2-100P-0.635SH(71)	CL572-2768-1-71	100	73.55	62.865	68.85	32.25	34.25	66.50	71.95	50

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.10 MAX.

2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3 NUMBER OF CONTACTS.

3	BRASS	TIN-PLATING				CONTACT AREA: GOLD 0.2μm min.	
1	POLYPHENYLEN SULFIDE	LIGHT BROWN (UL94V-0)		2		LEAD AREA: TIN-PLATING 2μm min.	
						UNDER PLATING: NICKLE 1μm min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)				DRAWN	DESIGNED	CHECKED	APPROVED
				T. YANAGISAWA	J. Mada	K. Ogawa	H. Kawan
				'05.08.05	'05.8.6	'05.08.06	'05.08.06
DRAWING NO.		PART NO.					
EDC3-152588-21		FX2--*P-O.635SH(71)					
SCALE	FREE	CODE NO.		CL572			
UNITS	mm	HIROSE ELECTRIC CO., LTD		1/1			

TO	PCK			
----	-----	--	--	--